

2N5151U3 & 2N5153U3




PNP Power Silicon Transistor

Rev. V5

Features

- Available in JAN, JANTX, JANTXV, JANS and JANSR per MIL-PRF-19500/545
- Lightweight & Low Power
- Ideal for Space, Military, and Other High Reliability Applications
- Surface Mount U3 Package



Electrical Characteristics ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Test Conditions	Symbol	Units	Min.	Max.
Collector - Emitter Breakdown Voltage	$I_C = -100 \text{ mA dc}; I_B = 0$	$V_{(BR)CEO}$	V dc	-80	—
Emitter - Base Cutoff Current	$V_{EB} = -4.0 \text{ V dc}; I_C = 0$	I_{EBO1}	$\mu\text{A dc}$	—	-1.0
	$V_{EB} = -5.5 \text{ V dc}; I_C = 0$	I_{EBO2}	mA dc	—	-1.0
Collector - Emitter Cutoff Current	$V_{CE} = -60 \text{ V dc}; V_{BE} = 0$	I_{CES1}	$\mu\text{A dc}$	—	-1.0
	$V_{CE} = -100 \text{ V dc}; V_{BE} = 0$	I_{CES2}	mA dc	—	-1.0
Collector - Emitter Cutoff Current	$V_{CE} = -40 \text{ V dc}; I_B = 0$	I_{CEO}	$\mu\text{A dc}$	—	-50
Forward Current Transfer Ratio	$V_{CE} = -5.0 \text{ Vdc}; I_C = -50 \text{ mA dc}$ 2N5151U3	h_{FE}	-	20	—
	$V_{CE} = -5.0 \text{ Vdc}; I_C = -50 \text{ mA dc}$ 2N5153U3			50	—
	$V_{CE} = -5.0 \text{ Vdc}; I_C = -2.5 \text{ A dc}$ 2N5151U3			30	90
	$V_{CE} = -5.0 \text{ Vdc}; I_C = -2.5 \text{ A dc}$ 2N5153U3			70	200
Collector - Emitter Saturation Voltage	$I_C = -2.5 \text{ A dc}; I_B = -250 \text{ mA dc}$	$V_{CE(sat)1}$	V dc	—	-0.75
	$I_C = -5.0 \text{ A dc}; I_B = -500 \text{ mA dc}$	$V_{CE(sat)2}$	V dc	—	-1.50
Base - Emitter Voltage (Non-Saturated)	$V_{CE} = -5.0 \text{ V dc}; I_C = -2.5 \text{ A dc}$	V_{BE}	V dc	—	-1.45
Base - Emitter Saturation Voltage	$I_C = -2.5 \text{ A dc}; I_B = -250 \text{ mA dc}$	$V_{BE(sat)1}$	V dc	—	-1.45
	$I_C = -5.0 \text{ A dc}; I_B = -500 \text{ mA dc}$	$V_{BE(sat)2}$	V dc	—	-2.20
Magnitude of Common Emitter Small-Signal Short-Circuit, Forward Current, Transfer Ratio	$V_{CE} = -5.0 \text{ Vdc}; I_C = -500 \text{ mA dc}; f = 10 \text{ MHz}$ 2N5151U3 2N5153U3	$ h_{fe} $	-	6 7	—
Common-Emitter, Small-Signal Short-Circuit Forward Current Transfer Ratio	$V_{CE} = -5.0 \text{ V dc}; I_C = -100 \text{ mA dc}; f = 1 \text{ kHz}$ 2N5151U3 2N5153U3	h_{fe}	-	20 50	—
Open-Circuit Output Capacitance	$V_{CB} = -10 \text{ V dc}, I_E = 0, f = 1 \text{ MHz}$	C_{obo}	pF	—	250

2N5151U3 & 2N5153U3



PNP Power Silicon Transistor

Rev. V5

Electrical Characteristics ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Test Conditions	Symbol	Units	Min.	Max.
Collector - Emitter Cutoff Current	$T_C = +150^\circ\text{C}$ $V_{CE} = -60\text{ V dc}; V_{BE} = +2\text{ V dc}$	I_{CEX}	$\mu\text{A dc}$	—	-25
Forward - Current Transfer Ratio	$T_C = -55^\circ\text{C}$ $V_{CE} = -5\text{ V dc}; I_C = -2.5\text{ A dc}$ 2N5151U3 2N5153U3	h_{FE4}	-	15 25	

Absolute Maximum Ratings ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Ratings	Symbol	Value
Collector - Emitter Voltage	V_{CEO}	-80 V dc
Collector - Base Voltage	V_{CBO}	-100 V dc
Emitter - Base Voltage	V_{EBO}	-5.5 Vdc
Collector Current	I_C	-2 A dc -10 A dc ⁽³⁾
Reverse Pulse Energy ⁽⁴⁾		15 mj
Total Power Dissipation ⁽¹⁾ @ $T_A = 25^\circ\text{C}$ @ $T_C = 25^\circ\text{C}$	P_T	1.16 W 100 W
Operating & Storage Temperature Range	T_J, T_{STG}	-65°C to +200°C

Thermal Characteristics

Characteristics	Symbol	Max. Value
Thermal Resistance, Junction to Case ⁽²⁾	$R_{\theta JC}$	1.75°C/W
Thermal Resistance, Junction to Ambient ⁽²⁾	$R_{\theta JA}$	150°C/W ⁽⁵⁾

(1) See figures 6, 7, 8 and 9 of MIL-PRF-19500/545 for temperature-power derating curves.

(2) See figures 10, 11 and 12 of MIL-PRF-19500/545 for transient thermal impedance graph.

(3) The value applies for $p_w \leq 8.3\text{ ms}$, duty cycle ≤ 1 percent.

(4) This rating is based on the capability of the transistors to operate safely in the unclamped inductive load energy test circuit, see subgroup 5 of the group A inspection table and figure 13 of MIL-PRF-19500/545.

(5) Mounted on an FR4 printed circuit board.

2N5151U3 & 2N5153U3



PNP Power Silicon Transistor

Rev. V5

Electrical Characteristics ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Test Conditions	Symbol	Units	Min.	Max.
Switching Characteristics					
Turn-On Time	$I_C = -5 \text{ A dc}; I_{B1} = -500 \text{ mA dc}, R_L = 6 \Omega,$ $I_{B2} = -500 \text{ mA dc}, V_{BE(off)} = -3.7 \text{ Vdc}$	t_{on}	μs	—	0.5
Turn-Off Time		t_{off}	μs	—	1.5
Storage Time		t_s	μs	—	1.4
Fall Time		t_f	μs	—	0.5

Safe Operating Area


DC Tests:	$T_C = +25^\circ\text{C}, 1 \text{ Cycle}, t_p = 1 \text{ s}$
Test 1:	$V_{CE} = -5.8 \text{ V dc}; I_C = -2 \text{ A dc}$
Test 2:	$V_{CE} = -32 \text{ Vdc}; I_C = -360 \text{ mA dc}$
Test 3:	$V_{CE} = -80 \text{ Vdc}; I_C = -14.5 \text{ mA dc}$

2N5151U3 & 2N5153U3

PNP Power Silicon Transistor

Rev. V5

Outline Drawing (U3)

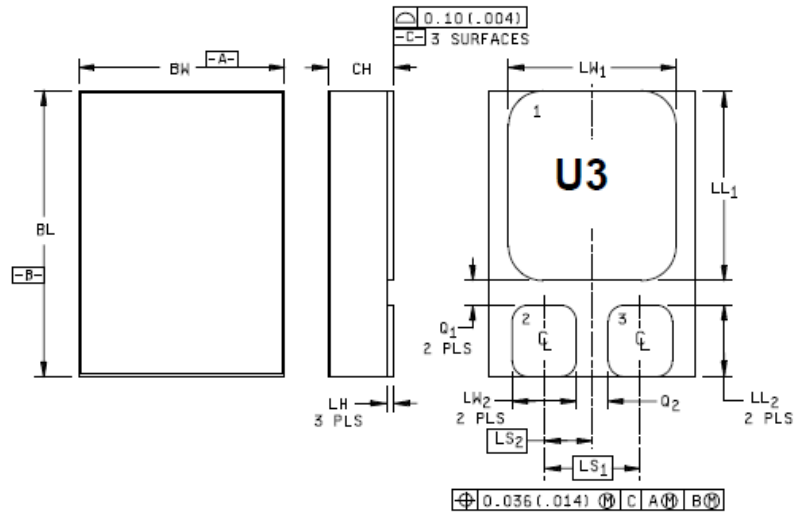

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BL	.395	.405	10.04	10.28
BW	.291	.301	7.40	7.64
CH	.1085	.1205	2.76	3.06
LH	.010	.020	0.25	0.51
LL1	.220	.230	5.59	5.84
LL2	.115	.125	2.93	3.17
LS1	.150 BSC		3.81 BSC	
LS2	.075 BSC		1.91 BSC	
LW1	.281	.291	7.14	7.39
LW2	.090	.100	2.29	2.54
Q1	.030		0.762	
Q2	.030		0.762	

NOTES:

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Terminal 1 - collector, terminal 2 - base, terminal 3 - emitter.

SCHMATIC




FIGURE 2. Physical dimensions and configuration for surface mount (U3).

2N5151U3 & 2N5153U3



PNP Power Silicon Transistor

Rev. V5

VPT COMPONENTS. ALL RIGHTS RESERVED.

Information in this document is provided in connection with VPT Components products. These materials are provided by VPT Components as a service to its customers and may be used for informational purposes only. Except as provided in VPT Components Terms and Conditions of Sale for such products or in any separate agreement related to this document, VPT Components assumes no liability whatsoever. VPT Components assumes no responsibility for errors or omissions in these materials. VPT Components may make changes to specifications and product descriptions at any time, without notice. VPT Components makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF VPT COMPONENTS PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. VPT COMPONENTS FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. VPT COMPONENTS SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

VPT Components products are not intended for use in medical, lifesaving or life sustaining applications. VPT Components customers using or selling VPT Components products for use in such applications do so at their own risk and agree to fully indemnify VPT Components for any damages resulting from such improper use or sale.