

Helping Customers Innovate, Improve & Grow



EX-421

## Description

The EX-421 provides exceptionally low aging rates and tight temperature stabilities in an extremely small package over a wide range of environmental conditions. This EMXO series bridges the gap between current large, high precision OCXO's and smaller TCXO's. The EX-421 Series becomes the most economical choice where there is a need for spectral purity, short and long term stability, along with small size and dramatically reduced power consumption.

## Features

- Low Power Consumption Precision Oscillator
- Fast Warm-up
- Low Phase Noise
- Good Aging
- Small Form Factor
- SMD and Thru-Hole Mounting Option
- RoHS Compliant
- Standard Frequencies: 10MHz, 20MHz and 100MHz
- Design/Material Sourcing/Manufacture/Test in MHS,PA COO:USA
- No ITAR Restriction for importing EAR99
- Previous Model Number: EX-620, EX-420 series

## Applications

- Mobile Data Communications
- Military Portable Radio
- Satellite Communications
- Airborne Equipment
- Avionics
- Instrumentation
- Marine/Land Seismic



## Performance Specifications


Frequency Stabilities <sup>1</sup>					
Parameter	Min	Typ	Max	Units	Condition
vs. operating temperature range (See temperature & stability table)			±10 ±20 ±30	ppb ppb ppb	0... +50°C -20... +70°C -40... +85°C
vs. aging / day (See aging table) vs. aging / per year vs. aging / 10 years			±1.0 ±100 ±1	ppb ppb ppm	after 30 days of operation
Initial Accuracy vs. supply voltage change vs. load change	-0.2 -5 -5		+0.2 +5 +5	ppm ppb ppb	at time of shipment VS ± 5% Load ± 5%
Warm-up Time			45 60	sec. sec.	to ± 1 ppm of final frequency (1 hour) to ± 100 ppb of final frequency (1 hour)
Supply Voltage (Vs)					
Supply voltage (Standard)	4.75	5.0	5.25	VDC	
Supply voltage (Option)	3.14	3.3	3.46	VDC	
Power Consumption			1.5 0.25 0.30	Watts Watts Watts	during warm-up steady state @ +25°C / 3.3 Vdc steady state @ +25°C / 5.0 Vdc

## Performance Specifications

Parameter	Min	Typ	Max	Units	Condition
Signal [Standard]	<b>HCMOS</b>				
Load		15		pF	
Signal Level (Vol)			0.1 Vs	VDC	
Signal Level (Voh)	0.8 Vs 0.8 Vs			VDC VDC	Vs = 3.3 Vdc Vs = 5.0 Vdc
Rise \ Fall Time			5	ns	10MHz to 29.999MHz , (10 % - 80 %)
Rise \ Fall Time			3	ns	30MHz to 100MHz , (10 % - 80 %)
Duty cycle	45		55	%	
Signal [Standard]	<b>Sinewave</b>				
Load		50		ohm	
Output Power [Standard]	0		+4	dBm	50 Ohm load
Output Power [Option]	+3		+7	dBm	50 Ohm load
Output Power [Option]	+5		+9	dBm	50 Ohm load
Harmonics			-30	dBc	50 Ohm load
<b>Frequency Tuning (EFC)</b>					
Reference Voltage (Vref)	2.7 4.2		2.9 4.4	VDC VDC	Vs = 3.3 Vdc Vs = 5.0 Vdc
Tuning Voltage	0		+Vref	VDC	
Tuning Range	See tuning range table				
Tuning Slope	Positive				
<b>Additional Parameters</b>					
Phase Noise (10 MHz)		-90		dBc/Hz	1 Hz
		-125		dBc/Hz	10 Hz
		-145		dBc/Hz	100 Hz
		-160		dBc/Hz	1 KHz
		-165		dBc/Hz	10 KHz
Phase Noise (100 MHz)		-95		dBc/Hz	10 Hz
		-125		dBc/Hz	100 Hz
		-150		dBc/Hz	1 KHz
		-160		dBc/Hz	10 KHz
		-165		dBc/Hz	100 KHz
Allan Deviation (10 MHz)			0.02	ppb	Tau = 1 sec
Acceleration Sensitivity			1.0	ppb/g	Total Gamma
Weight			5	grams	
<b>Absolute Maximum Ratings</b>					
Supply Voltage			5.5	VDC	
Output Load			50	pF	
Operable temperature range	-55		+85	°C	
Storage temperature range	-55		+85	°C	


<b>Standard Environmentals</b>	
Vibration Sine	MIL-STD-202, Method 204, Condition G (30g peak, 10Hz-2000Hz)
Vibration Random	MIL-STD-202, Method 214, Condition I-H (30g RMS, 10Hz-2000Hz)
Shock	MIL-STD-202, Method 213, Condition E (1000g, 0.5ms, 1/2 sine)
Solderability	MIL-STD-883, Method 2003

## Surface Mount


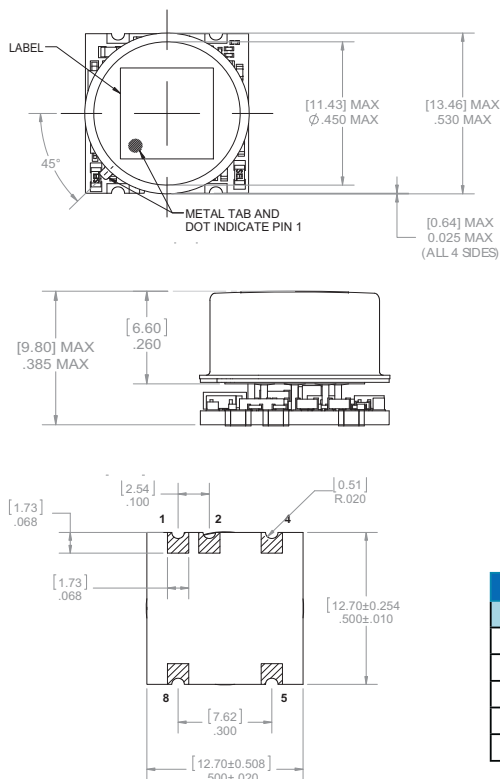


Pin Connections		
Pin	EFC OPTIONS	FIX FREQ. OPTIONS
1	EFC Input	No Connection
2	Vref Output	No Connection
4	Ground (Case)	Ground (Case)
5	RF Output	RF Output
8	Supply Voltage Input	Supply Voltage Input



## Thru-hole

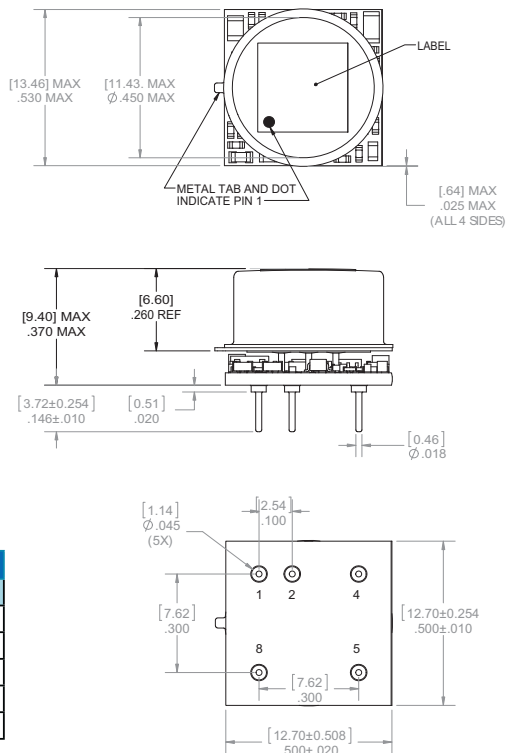


## Standard Shipping Method (surface mount)

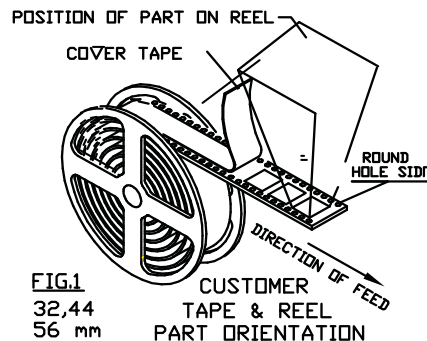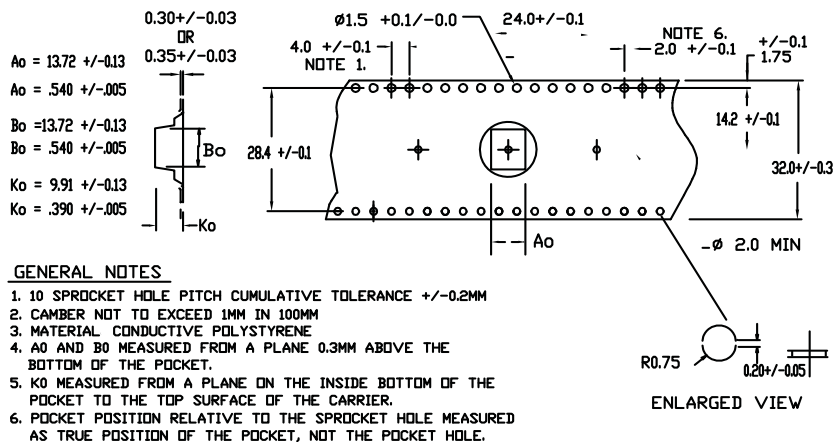

## Standard Shipping Method (thru-hole)

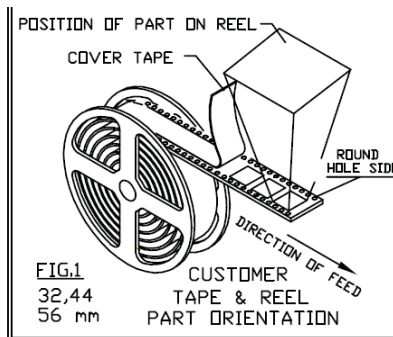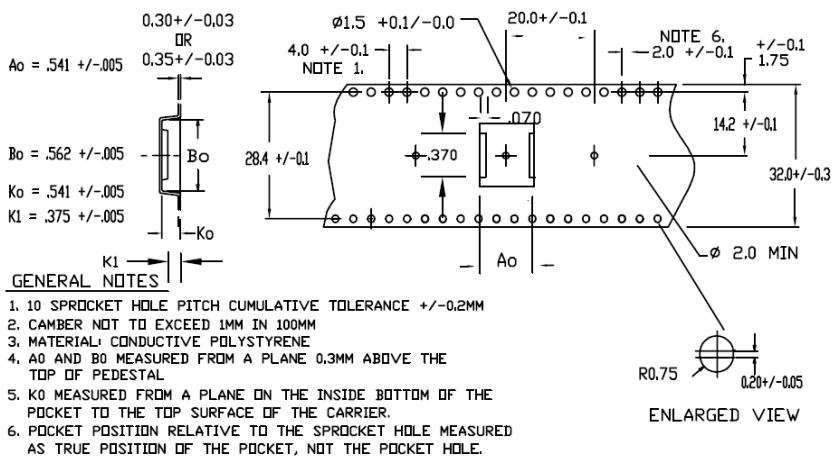

## Recommended Reflow Profiles for Pb-Free & Sn-Pb

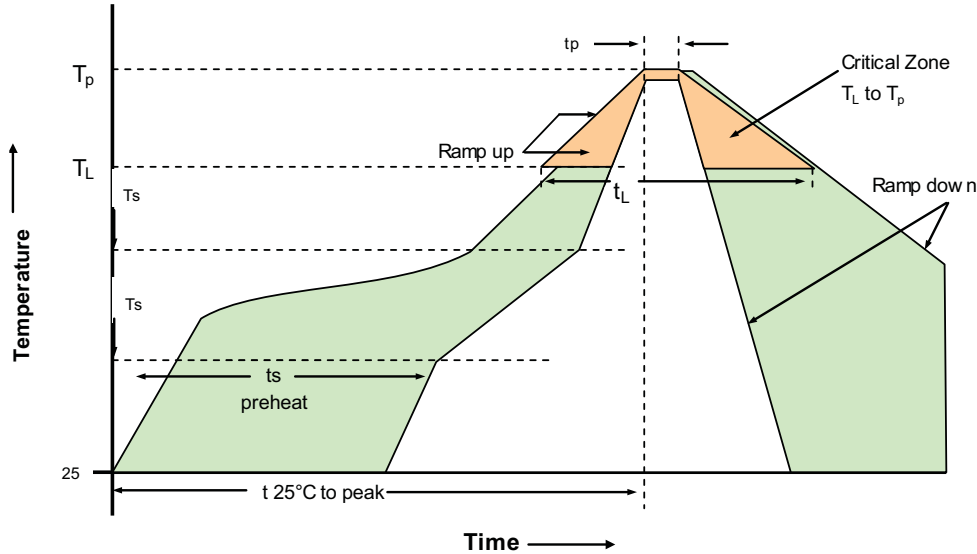

### 230°C Reflow Profile

Profile Feature	Sn-Pb Assembly	Profile Feature	Sn-Pb Assembly
Average ramp-up rate (TL to TP)	3°C/seconds max.	Time 25°C to Peak Temperature	4 minutes max.
Preheat - Temperature min T <sub>sm</sub> - Temperature Min T <sub>sm</sub> - Time (min to max) (t <sub>s</sub> )	135°C 155°C 60-90 seconds	Time maintained above - Temperature (TL) - Time (t <sub>L</sub> )	183°C 45-60 seconds
T <sub>sm</sub> to TL -Ramp-up Rate	3°C/seconds max.		
Time maintained above - Temperature (TL) - Time (TL)	183°C 40-60 seconds	Time within 5°C of actual Peak Temperature (t <sub>p</sub> )	10-20 seconds max.
Peak Temperature (T <sub>p</sub> )	max 230°C	Ramp-down Rate	6°C/seconds max.


**Note:** All temperatures refer to topside of the package, measured on the package body surface.

### 260°C Reflow Profile

Profile Feature	Pb-Free Assembly	Profile Feature	Pb-Free Assembly
Average ramp-up rate (TL to TP)	3°C/seconds max.	Time 25°C to Peak Temperature	8 minutes max.
Preheat - Temperature min T <sub>sm</sub> - Temperature min T <sub>sm</sub> - Time (min to max) (t <sub>s</sub> )	150°C 200°C 60-180 seconds	Time maintained above - Temperature (TL) - Time (t <sub>L</sub> )	217°C 60-150 seconds
T <sub>sm</sub> to TL -Ramp-up Rate	3°C/seconds max.		
Time maintained above - Temperature (TL) - Time (TL)	217°C 60-150 seconds	Time within 5°C of actual Peak Temperature (t <sub>p</sub> )	20-40 seconds max.
Peak Temperature (T <sub>p</sub> )	max 260°C	Ramp-down Rate	6°C/seconds max.

**Note:** All temperatures refer to topside of the package, measured on the package body surface.

# Ordering Information

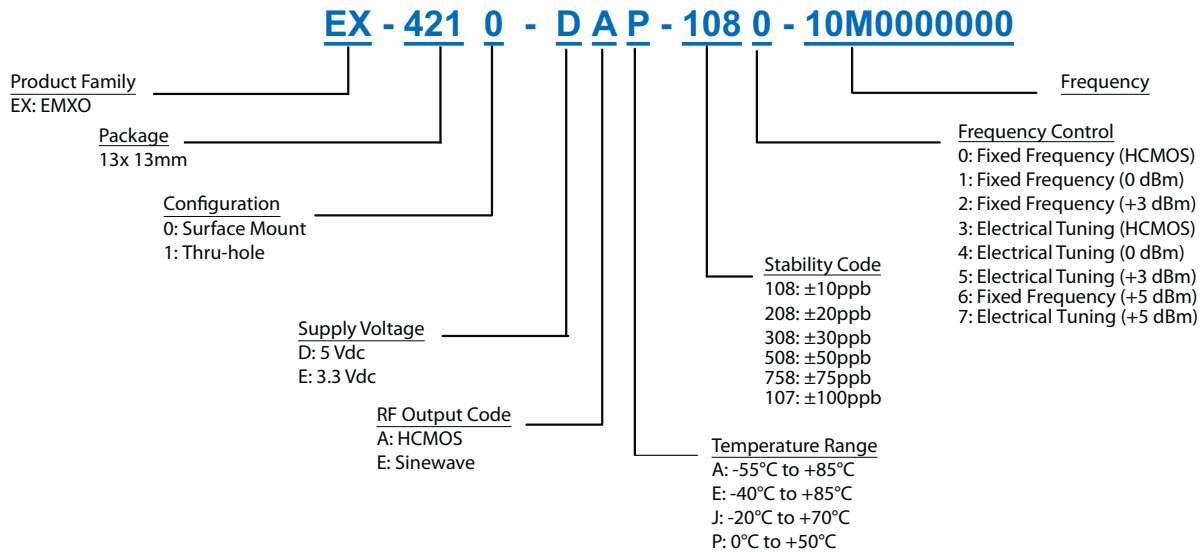

Temperature Range and Stability Table				
( Temperature Stability Reference to $(F_{max}-F_{min})/2$ )				
Stability/Temperature	A: -55°C to +85°C	E: -40°C to +85°C	J: -20°C to +70°C	P: 0°C to +50°C
108 (+/-10ppb)				10-20MHz
208 (+/-20ppb)			10-20MHz	10-20MHz
308 (+/-30ppb)	10-20MHz	10-20MHz	10-20MHz	10-20MHz
508 (+/-50ppb)	10-50MHz	10-50MHz	10-50MHz	10-50MHz
758 (+/-75ppb)	10-80MHz	10-100MHz	10-100MHz	10-100MHz
107 (+/-100ppb)	10-100MHz			

Aging Table			
Frequency Range	Daily Rate (ppb/day)	Yearly Rate (ppb/year)	Tuning Range (ppm)
10MHz to 15MHz	± 1	± 100	± 1
>15MHz to 100MHz	± 2	± 200	± 2

**Notes:**

- Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
- Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
- Phase noise degrades with increasing output frequency.
- Subject to technical modification.
- Contact factory for availability.

## For Additional Information, Please Contact

**USA:**

Vectron International  
267 Lowell Road, Unit 102  
Hudson, NH 03051  
Tel: 1.888.328.7661  
Fax: 1.888.329.8328

**Europe:**

Vectron International  
Landstrasse, D-74924  
Neckarbischofsheim, Germany  
Tel: +49 (0) 3328.4784.17  
Fax: +49 (0) 3328.4784.30

**Asia:**

Vectron International  
68 Yin Cheng Road(C), 22nd Floor  
One LuJiaZui  
Pudog, Shanghai 200120, China  
Tel: 86.21.6194.6886  
Fax: 86.21.6194.6699

**Disclaimer**

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.