


|          |        |           |
|----------|--------|-----------|
| DASH NO. | M CODE | MADE FROM |
|----------|--------|-----------|

# GSD

KH-59-64

### REVISIONS

| ISSUE | CHANGES |                     |
|-------|---------|---------------------|
| 2     | CN WJM  | 31649 E<br>2 APR 90 |
| 3     | CN JLA  | 39307 B<br>07/27/05 |

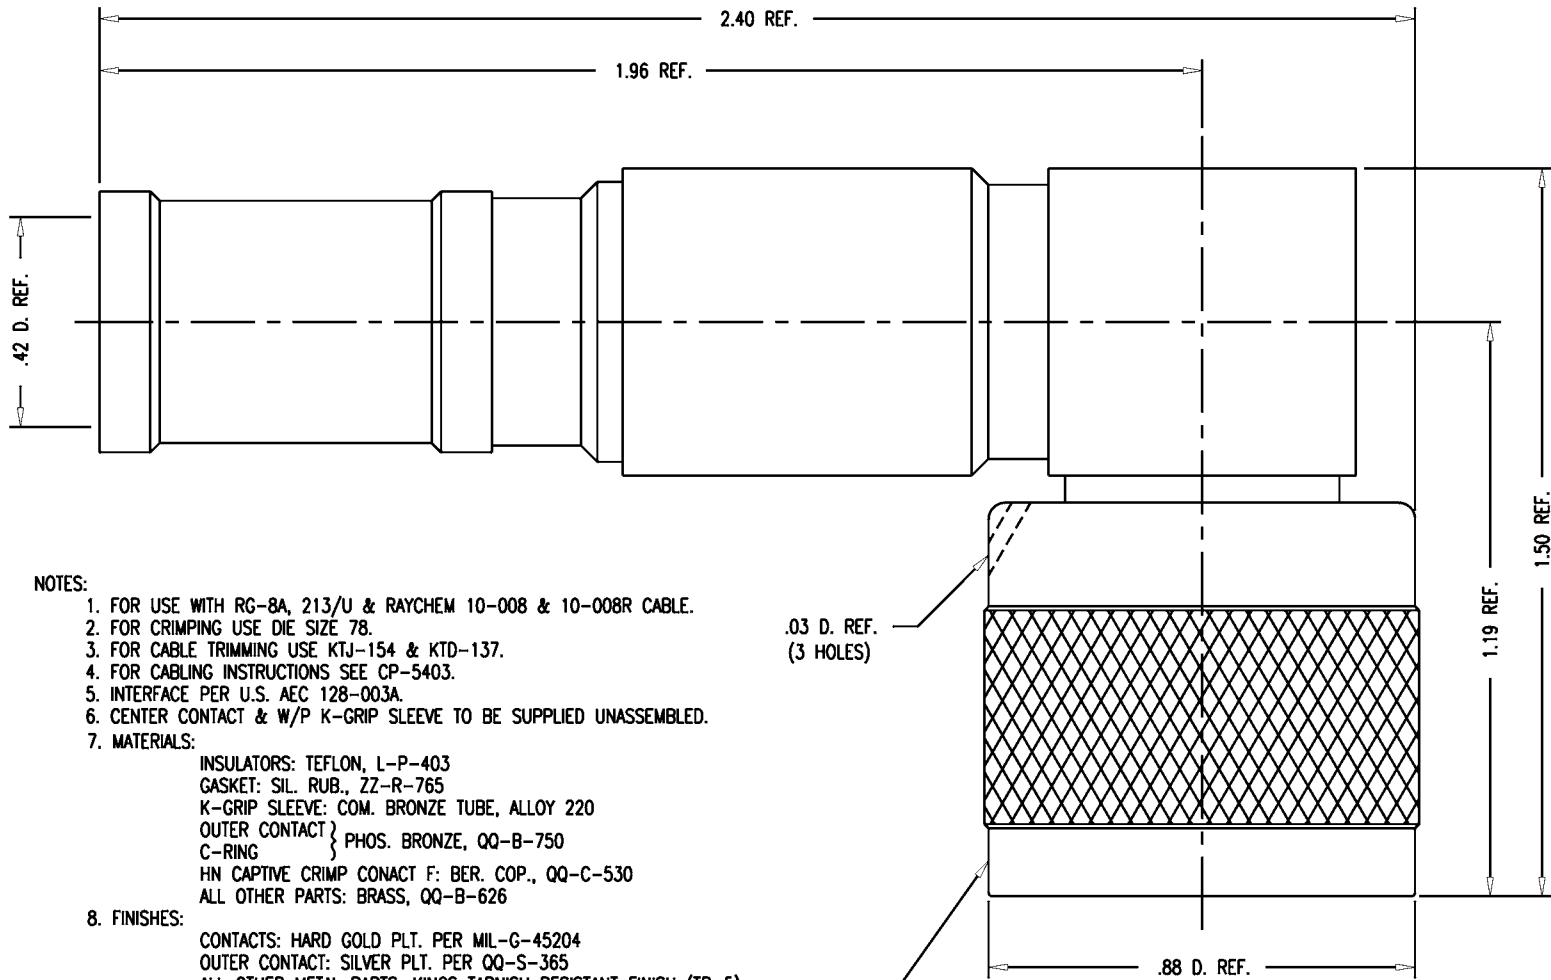

**NOTES:**

- FOR USE WITH RG-8A, 213/U & RAYCHEM 10-008 & 10-008R CABLE.
- FOR CRIMPING USE DIE SIZE 78.
- FOR CABLE TRIMMING USE KTJ-154 & KTD-137.
- FOR CABLING INSTRUCTIONS SEE CP-5403.
- INTERFACE PER U.S. AEC 128-003A.
- CENTER CONTACT & W/P K-GRIP SLEEVE TO BE SUPPLIED UNASSEMBLED.
- MATERIALS:
  - INSULATORS: TEFLON, L-P-403
  - GASKET: SIL. RUB., ZZ-R-765
  - K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
  - OUTER CONTACT } PHOS. BRONZE, QQ-B-750
  - C-RING }
  - HN CAPTIVE CRIMP CONTACT F: BER. COP., QQ-C-530
  - ALL OTHER PARTS: BRASS, QQ-B-626
- FINISHES:
  - CONTACTS: HARD GOLD PLT. PER MIL-G-45204
  - OUTER CONTACT: SILVER PLT. PER QQ-S-365
  - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
  - NOMINAL IMPEDANCE: 50 OHMS
  - VOLTAGE RATING: 1500 VRMS
  - FREQUENCY RANGE: DC TO 4 GHz

STAMP: KINGS KH-59-64

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: BOEING

HN ANGLE PLUG

DRAWN JCA DATE 05/11/90

DESIGN MJB DATE 05-14-90

APPR. DATE

**KINGS**  
ELECTRONICS CO., INC.  
TUCKAHOE, NEW YORK 10707

KH-59-64

# GSD