
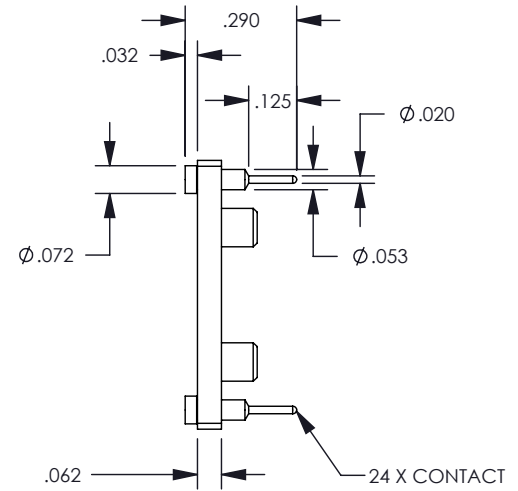


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL
 INSULATOR: FR4, COLOR BLACK, UL RATED 94V-0
 TERMINAL: BRASS, C36000, ASTM B16 CONTACT BeCu, C17200, ASTM B-194
 CONTACT: BeCu, C17200, ASTM B194
2. FINISHING
 TERMINAL: .000200 MIN. 90% TIN, 10% LEAD OVER .000050 MIN. NICKEL
 CONTACT: .000200 MIN. 90% TIN, 10% LEAD OVER .000050 MIN. NICKEL
3. REF. SCHLUMBERGER PART NUMBER H214415 .

REV	DESCRIPTION	BY DATE	APPD
B	RELEASED DRAWING PER ER040727	DAO 3/01/12	VBH

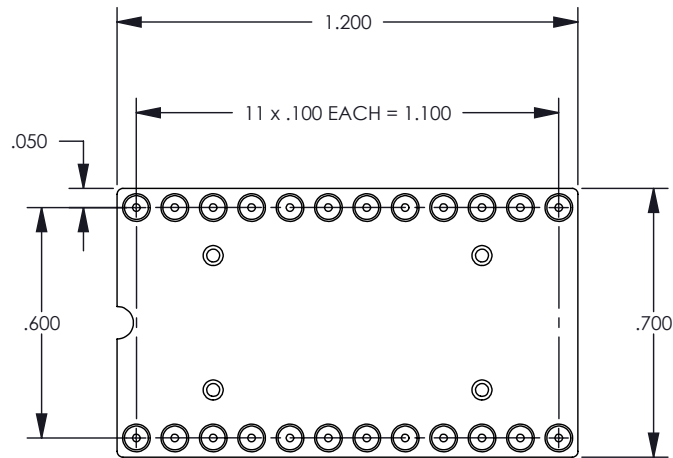

CATALOG NO: CNH214415

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: N/A				 WINCHESTER ELECTRONICS Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER SALES DRAWING			THIRD ANGLE 	24 POSITION MOLDED DIP SOCKET (SCHLUMBERGER)	
DRAWN	DATE	APPROVED	DATE	A	SDCNH214415
JJN	07/27/10	WPM	08/04/10		
APPROVED	DATE	APPROVED	DATE	1	OF 1
JDS	08/04/10	VBH	08/04/10	REV B	