



# FLANGED & BAYONET EUROPEAN BASED LEDs

## FEATURES

### DIRECTLY REPLACES STANDARD INCANDESCENTS

- 10 YEAR / 100,000 HOURS
- SOLID STATE - HIGH SHOCK & VIBRATION RESISTANCE
- BUILT-IN CURRENT LIMITING RESISTOR FOR APPLICATIONS FOR 2V TO 130VAC
- HIGH INTENSITY ILLUMINATION
- LOW CURRENT-POWER SAVINGS 100 TO 500% AND MORE...
- CHOICE OF MULTICHIPS, DUAL-CHIPS & SINGLE CHIPS
- PILOT LIGHTS, INDUSTRIAL CONTROLS, LIGHTED PUSH-BUTTON SWITCHES, AUTOMOTIVE INDICATORS ETC.
- CHOICE OF 8 COLORS

### T1¼ SUBMINATURE FLANGED BASED LEDs


#### REPLACES FOLLOWING INCANDESCENTS

PART NO:

**F154 CR6-28V/20-P**

| MODEL #                    | LENS/COLOR/BRIGHT                      | VOLTS/mAmps Typ                                                                                       | FEATURES                                                                  |
|----------------------------|----------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| MULTICHIP (4-CHIP)<br>F154 | CR3K,CR6,CR5,C05,CY5,<br>CLY5,CG5,CPG5 | 4Vf, 8Vf = EXT. RES. REQD.<br>5V/25,,12V/12,14V/12,24V/12,<br>28V/10<br>Other Voltage/mAmps Available | CENTER CONTACT:<br>P= POSITIVE +<br>N= NEGATIVE -<br>BP=BIPOLAR<br>AC=VAC |

F154



### T2 (Ba5s) SUBMINATURE BAYONET BASED LEDs


#### REPLACES FOLLOWING INCANDESCENTS

PART NO:

**B206 CR6-28V/20-P**

| MODEL #                    | LENS/COLOR/BRIGHT                                                                                       | VOLTS/mAmps Typ                                                                                                                              | FEATURES                                                                  |
|----------------------------|---------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| MULTICHIP (6-CHIP)<br>B206 | CR3K,CR7,CR6,C06,CY6,<br>CLY6,CG6,CPG6,CB6,CW6<br>SPECIALS:<br>CRPG5=BICOLOR R/PG<br>COPG6=BICOLOR O/PG | 4Vf, 6Vf = EXT. RES. REQD.<br>5V/60,6V/60,12V/30,14V/30,<br>24V/20,28V/20,36V/15,48V/15,<br>60V/12,120VAC/8<br>Other Voltage/mAmps Available | CENTER CONTACT:<br>P= POSITIVE +<br>N= NEGATIVE -<br>BP=BIPOLAR<br>AC=VAC |

B206 (Ba5s)



### T2 (Ba7s) SUBMINATURE BAYONET BASED LEDs


#### REPLACES FOLLOWING INCANDESCENTS

PART NO:


**B276 CR6-28V/20-P**

| MODEL #                                                | LENS/COLOR/BRIGHT                                                                                       | VOLTS/mAmps Typ                                                                                                                              | FEATURES                                                                  |
|--------------------------------------------------------|---------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| MULTICHIP (6-CHIP)<br>B276 = STANDARD<br>BS276 = SHORT | CR3K,CR7,CR6,C06,CY6,<br>CLY6,CG6,CPG6,CB6,CW6<br>SPECIALS:<br>CRPG5=BICOLOR R/PG<br>COPG6=BICOLOR O/PG | 4Vf, 6Vf = EXT. RES. REQD.<br>5V/60,6V/60,12V/30,14V/30,<br>24V/20,28V/20,36V/15,48V/15,<br>60V/12,120VAC/8<br>Other Voltage/mAmps Available | CENTER CONTACT:<br>P= POSITIVE +<br>N= NEGATIVE -<br>BP=BIPOLAR<br>AC=VAC |

B276 (Ba7s)

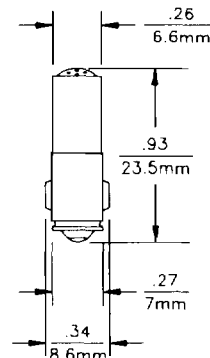

BS276 (Ba7s)



### SPECIALS:

- FLASHING/BLINKING LEDs
- SUNLIGHT VISIBLE GaAlAs HI-ULTRA REDS
- LOW CURRENT 1mA TO 5mA LEDs FOR BATTERY OPERATION
- BICOLOR LEDs
- INFRARED 850, 880 & 940nm