

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-.-

© COPYRIGHT - By - TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC
HBDIST
—

REVISIONS

変更

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D2	CHANGE LOGO&ADD LINE IDENTIFICATION ECO-12-001771	21Aug2012	YS.H	BH.Y






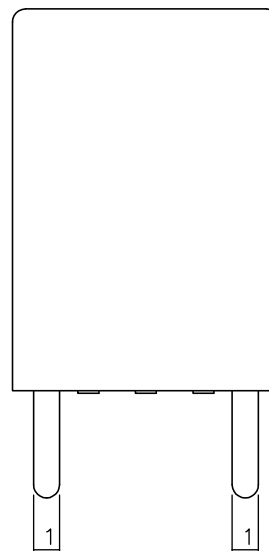


Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

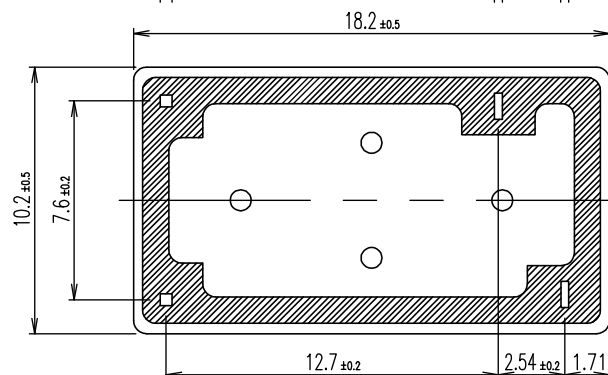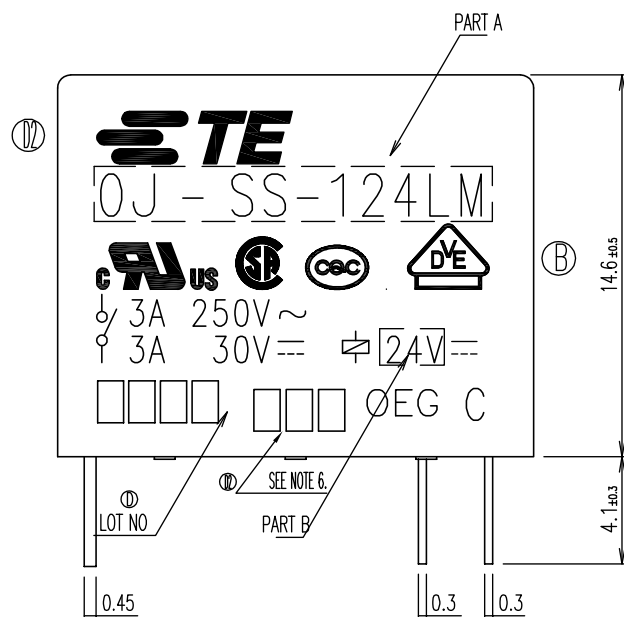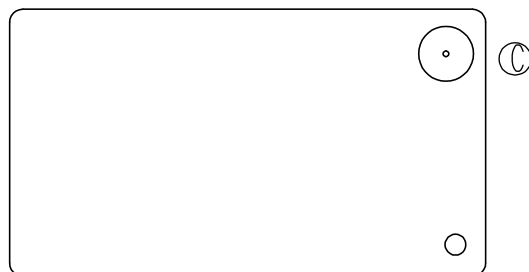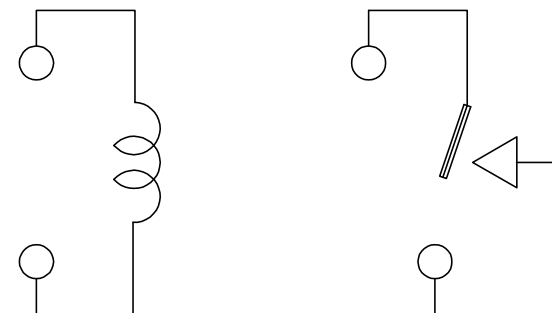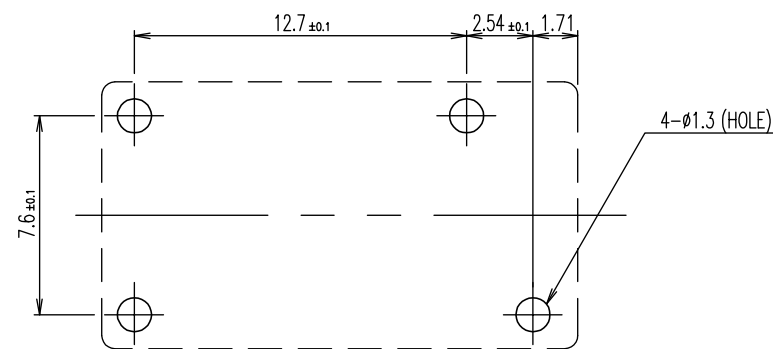

CONNECTION FIGURE

FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING
(BOTTOM VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 耗 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差
	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —
MATERIAL 材料	FINISH 仕上

DWN CHK APVD PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING	H.Sasaki Y.Oikawa A.Nagai 製品規格 取付適用規格 — — —
--	--

TE Connectivity		NAME 名称		OJ-SS-LM SPEC,000 CUSTOMER DRAWING	
SIZE A3	CAGE CODE 00779	DRAWING NO 番号 1461117	RESTRICTED TO —		
SCALE 尺度 5:1		SHEET 1 OF 2		REV D2	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-.-

© COPYRIGHT - By - TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

変更

HB

—

P

LTR

DESCRIPTION

DATE

DWN

APVD

—

SEE SHEET 1

—

—

—

ACTIVE	3-1419129-1	QJ-SS-124LM, 000	107-79010	24V	QJ-SS-124LM	f
OBSOLETE	4-1419144-2	QJ-SS-118LM, 000	107-79010	18V	QJ-SS-118LM	e
ACTIVE	2-1419129-1	QJ-SS-112LM, 000	107-79010	12V	QJ-SS-112LM	d
OBSOLETE	1461117-3	QJ-SS-109LM, 000	107-79010	9V	QJ-SS-109LM	c
OBSOLETE	1440007-1	QJ-SS-106LM, 000	107-79010	6V	QJ-SS-106LM	b
ACTIVE	1440007	QJ-SS-105LM, 000	107-79010	5V	QJ-SS-105LM	a
PART STATUS	PART NO	DESCRIPTION	PACKAGE SPEC.	PART B	PART A	TYPE

RELAY TYPE

①② NOTE:

1.LOT NO SYSTEM AS FOLLOWING:

WEEK
YEAR

② 2.TERMINAL DIMENSION IS BEFORE SOLDER DIP;

③ 3.FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH,THICKENSS AND DIAMETER.
+0.5mm FOR LENGTH.

④ 4.MARKING FROM INK TO LASER.

⑤ 5.ADD LOT NO. SYSTEM AS FOLLOWING;

1	1	A
I	II	III

I, DIGITS FOR DAY OF THE WEEK
1...MONDAY IN THIS WEEK;
2...TUESDAY IN THIS WEEK;
.....

7...SUNDAY IN THIS WEEK

II, DIGITS FOR SHIFT OF THE DAY

1...DAY SHIFT IN THIS DAY;
2...NIGHT SHIFT IN THIS DAY;III, ONE CHARACTER DISTINGUISH THE
LINE IDENTITY, SUCH AS: A,B.....Z

		EPOXY RESIN	SEAL (BASE & BOBBIN)	15
		3UEW	MAGNETIC WIRE	14
94V-0		P.B.T	CASE	13
94V-0		P.B.T	BASE	12
94V-0		P.B.T	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
94V-0		P.P.S	CARD	9
		Ag	MOVABLE CONTACT	8
		Ag	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	Cu ALLOY	NO.TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
	NIP	STEEL	CORE	3
	NIP	STEEL	ARMATURE	2
	NIP	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

H,Sasaki

CHK

Y.Oikawa

APVD

A.Nagai

PRODUCT SPEC

製品規格

APPLICATION SPEC

取付適用規格

—

WEIGHT

—

CUSTOMER DRAWING



TE Connectivity

NAME

名称

QJ-SS-LM SPEC,000 CUSTOMER DRAWING

—

—

SIZE

CAGE CODE

DRAWING NO

番号

1461117

RESTRICTED TO

—

SCALE

尺度 5:1

SHEET

2 OF 2

REV

D2

DIMENSIONS:

單位: 耗

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

一般公差

—

0 PLC ± —

1 PLC ± —

2 PLC ± —

3 PLC ± —

4 PLC ± —

ANGLES ± —

MATERIAL

材料

FINISH

仕上

—