


RV4PX306R



10-port sector antenna, 2x 698–960 and 8x 1710–2690 MHz, 65° HPBW, 5x RET with manual override.

General Specifications

Antenna Type	Sector
Band	Multiband
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	ASA, UV stabilized
Reflector Material	Aluminum
RF Connector Interface	7-16 DIN Female
RF Connector Location	Bottom
RF Connector Quantity, high band	8
RF Connector Quantity, low band	2
RF Connector Quantity, total	10

Remote Electrical Tilt (RET) Information

RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	1 female 1 male
Input Voltage	10–30 Vdc
Internal RET	High band (4) Low band (1)
Power Consumption, idle state, maximum	2 W
Power Consumption, normal conditions, maximum	13 W
Protocol	3GPP/AISG 2.0 (Single RET)

Dimensions

Width	353 mm 13.898 in
Depth	209 mm 8.228 in
Length	1599 mm 62.953 in


RV4PX306R

Net Weight, without mounting kit

24 kg | 52.911 lb

Array Layout

RV4PX

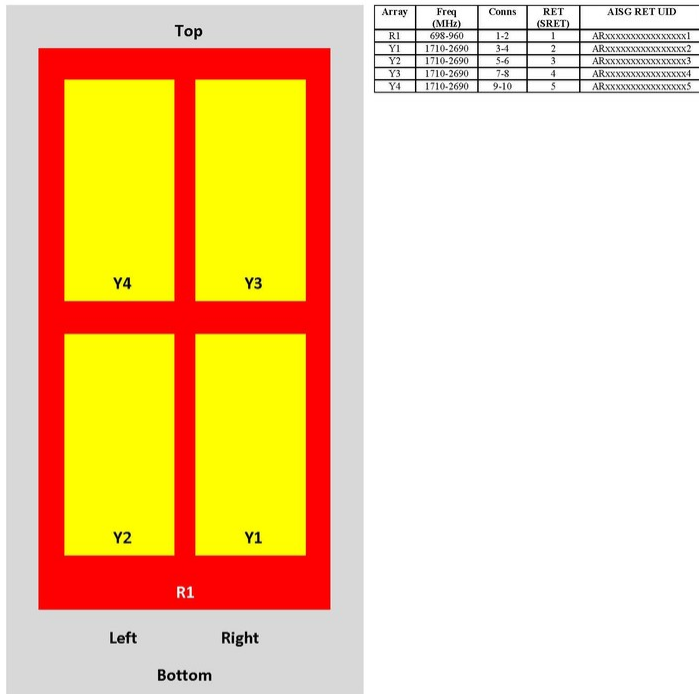

View from the front of the antenna

(Sizes of colored boxes are not true depictions of array sizes)

Electrical Specifications

Impedance

50 ohm

Operating Frequency Band

1710 – 2690 MHz | 698 – 960 MHz

Polarization

±45°

Electrical Specifications

Frequency Band, MHz	698–790	790–890	890–960	1710–1920	1920–2180	2300–2690
Gain, dBi	14.2	14.4	14.9	14.7	15.2	16.1
Beamwidth, Horizontal,	68	69	63	63	63	62

RV4PX306R

degrees

Beamwidth, Vertical, degrees	16.4	14.9	13.6	13.7	12.2	9.7
Beam Tilt, degrees	0–10	0–10	0–10	0–10	0–10	0–10
USLS (First Lobe), dB	18	18	18	18	18	18
Null Fill, dB	-22	-22	-22	-22	-22	-22
Front-to-Back Ratio at 180°, dB	23	23	23	27	28	28
CPR at Boresight, dB	16	12	12	17	15	14
CPR at Sector, dB	8	8	6	5	3	2
Isolation, Cross Polarization, dB	25	25	25	25	25	25
Isolation, Inter-band, dB	30	30	30	30	30	30
VSWR Return loss, dB	1.43 15.0	1.43 15.0	1.43 15.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150
Input Power per Port, maximum, watts	300	300	300	250	250	250

Electrical Specifications, BASTA

Frequency Band, MHz	698–790	790–890	890–960	1710–1920	1920–2180	2300–2690
Gain by all Beam Tilts, average, dBi	14	14.2	14.6	14.6	15	15.8
Gain by all Beam Tilts Tolerance, dB	±0.2	±0.2	±0.3	±0.5	±0.4	±0.5
Gain by Beam Tilt, average, dBi	0° 14.0 5° 14.0 10° 14.0	0° 14.2 5° 14.2 10° 14.1	0° 14.6 5° 14.6 10° 14.6	0° 14.6 5° 14.6 10° 14.6	0° 15.0 5° 15.0 10° 15.1	0° 16.0 5° 15.8 10° 15.6
Beamwidth, Horizontal Tolerance, degrees	±1.4	±1.2	±1.6	±2.5	±3.5	±6.4
Beamwidth, Vertical Tolerance, degrees	±0.8	±0.8	±0.5	±0.9	±1	±0.9
USLS, beampeak to 20° above beampeak, dB	18	18	18	18	18	18
Front-to-Back Total Power at 180° ± 30°, dB	25	23	23	23	25	25
CPR at Boresight, dB	17	13	13	20	17	18
CPR at Sector, dB	10	10	8	7	5	4

Mechanical Specifications

Wind Loading @ Velocity, frontal

681.0 N @ 150 km/h (153.1 lbf @ 150 km/h)

Wind Loading @ Velocity, lateral

265.0 N @ 150 km/h (59.6 lbf @ 150 km/h)

RV4PX306R

Wind Loading @ Velocity, rear	699.0 N @ 150 km/h (157.1 lbf @ 150 km/h)
Wind Speed, maximum	250 km/h 155.343 mph

Packaging and Weights

Width, packed	427 mm 16.811 in
Depth, packed	325 mm 12.795 in
Length, packed	1787 mm 70.354 in
Weight, gross	39 kg 85.98 lb

Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



Included Products

T-041-GL-E	–	Adjustable Tilt Pipe Mounting Kit for 2.0"-4.5" (60-115mm) OD round members for panel antennas. Includes 2 clamp sets.
------------	---	--

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
-------------------------	---