



Not for new design, this product will be obsoleted soon

TSDF1205 / 1205R / 1205W / 1205RW

Vishay Semiconductors

12 GHz Silicon NPN Planar RF Transistor

Features

- Low power applications
- Very low noise figure
- High transition frequency $f_T = 12$ GHz
- Lead (Pb)-free component
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



Applications

For low noise and small signal low power amplifiers. This transistor has superior noise figure and associated gain performance at UHF, VHF and microwave frequencies.

Mechanical Data

Typ: TSDF1205

Case: SOT143 Plastic case

Weight: approx. 8.0 mg


Pinning: 1 = Collector, 2 = Emitter, 3 = Base, 4 = Emitter

Typ: TSDF1205R



Case: SOT143R Plastic case

Weight: approx. 8.0 mg



Pinning: 1 = Collector, 2 = Emitter, 3 = Base, 4 = Emitter





SOT143




SOT143R



SOT343



SOT343R



Electrostatic sensitive device. Observe precautions for handling.

13629

Typ: TDSF1205W

Case: SOT343 Plastic case

Weight: approx. 6.0 mg

Pinning: 1 = Collector, 2 = Emitter, 3 = Base, 4 = Emitter

Typ: TSDF1205RW

Case: SOT343R Plastic case

Weight: approx. 8.0 mg

Pinning: 1 = Collector, 2 = Emitter, 3 = Base, 4 = Emitter

Parts Table

Part	Ordering Code	Type Marking	Remarks
TSDF1205	TSDF1205-GS08	F05	Tape and Reel
TSDF1205R	TSDF1205R-GS08	05F	Tape and Reel
TSDF1205RW	TSDF1205RW-GS08	W0F	Tape and Reel
TSDF1205W	TSDF1205W-GS08	WF0	Tape and Reel

Absolute Maximum Ratings

$T_{amb} = 25\text{ °C}$, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Collector-base voltage		V_{CBO}	9	V
Collector-emitter voltage		V_{CEO}	4	V
Emitter-base voltage		V_{EBO}	2	V
Collector current		I_C	12	mA
Total power dissipation	$T_{amb} \leq 132\text{ °C}$	P_{tot}	40	mW
Junction temperature		T_J	150	°C
Storage temperature range		T_{stg}	- 65 to + 150	°C

Maximum Thermal Resistance

Parameter	Test condition	Symbol	Value	Unit
Junction to ambient air	1)	R_{thJA}	450	K/W

1) on glass fibre printed board (25 x 20 x 1.5) mm³ plated with 35 µm Cu

Electrical DC Characteristics

$T_{amb} = 25\text{ °C}$, unless otherwise specified

Parameter	Test condition	Symbol	Min	Typ.	Max	Unit
Collector-emitter cut-off current	$V_{CE} = 12\text{ V}, V_{BE} = 0$	I_{CES}			100	µA
Collector-base cut-off current	$V_{CB} = 10\text{ V}, I_E = 0$	I_{CBO}			100	nA
Emitter-base cut-off current	$V_{EB} = 1\text{ V}, I_C = 0$	I_{EBO}			2	µA
Collector-emitter breakdown voltage	$I_C = 1\text{ mA}, I_B = 0$	$V_{(BR)CEO}$	4			V
Collector-emitter saturation voltage	$I_C = 5\text{ mA}, I_B = 0.5\text{ mA}$	V_{CEsat}		0.1	0.5	V
DC forward current transfer ratio	$V_{CE} = 2\text{ V}, I_C = 2\text{ mA}$	h_{FE}	50	120	250	



Electrical AC Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Test condition	Symbol	Min	Typ.	Max	Unit
Transition frequency	$V_{CE} = 2\text{ V}$, $I_C = 5\text{ mA}$, $f = 1\text{ GHz}$	f_T		12		GHz
Collector-base capacitance	$V_{CB} = 1\text{ V}$, $f = 1\text{ MHz}$	C_{cb}		0.2		pF
Collector-emitter capacitance	$V_{CE} = 1\text{ V}$, $f = 1\text{ MHz}$	C_{ce}		0.35		pF
Emitter-base capacitance	$V_{EB} = 0.5\text{ V}$, $f = 1\text{ MHz}$	C_{eb}		0.15		pF
Noise figure	$V_{CE} = 2\text{ V}$, $I_C = 2\text{ mA}$, $Z_S = Z_{Sopt}$, $Z_L = 50\text{ }\Omega$, $f = 2\text{ GHz}$	F		1.3		dB
Power gain	$V_{CE} = 2\text{ V}$, $I_C = 2\text{ mA}$, $f = 2\text{ GHz}$ (at F_{opt})	G_{pe}		13		dB
	$V_{CE} = 2\text{ V}$, $I_C = 5\text{ mA}$, $Z_S = Z_{Sopt}$, $Z_L = 50\text{ }\Omega$, $f = 2\text{ GHz}$	G_{pe}		11.5		dB
Transducer gain	$V_{CE} = 2\text{ V}$, $I_C = 5\text{ mA}$, $Z_0 = 50\text{ }\Omega$, $f = 2\text{ GHz}$	$ S_{21e} ^2$		12.5		dB

Typical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

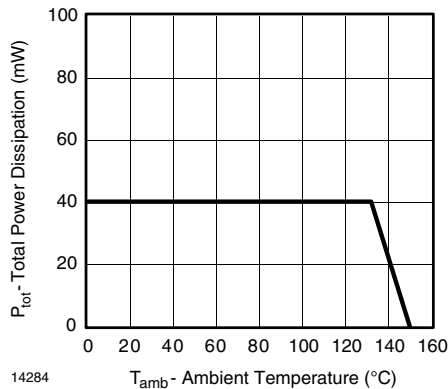


Figure 1. Total Power Dissipation vs. Ambient Temperature

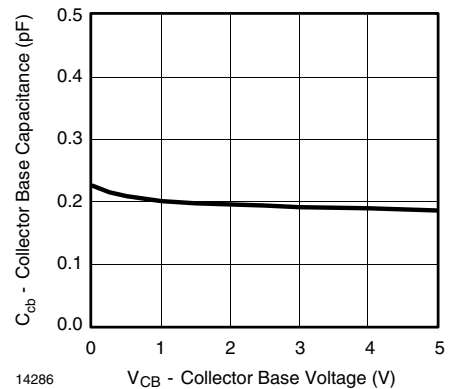


Figure 3. Collector Base Capacitance vs. Collector Base Voltage

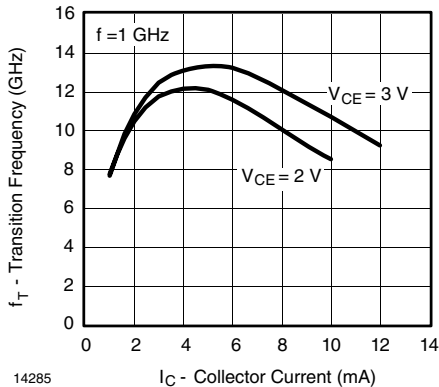


Figure 2. Transition Frequency vs. Collector Current

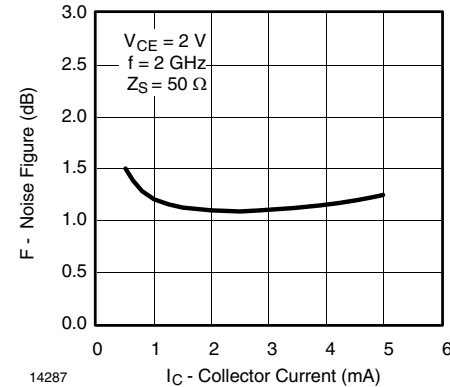





Figure 4. Noise Figure vs. Collector Current

TSDF1205 / 1205R / 1205W / 1205RW




Vishay Semiconductors

Package Dimensions in mm (Inches): SOT143

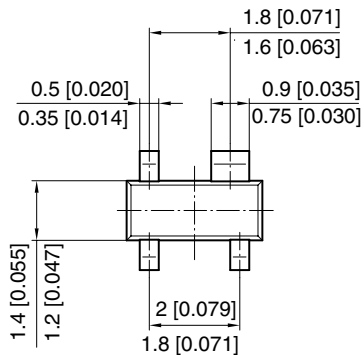

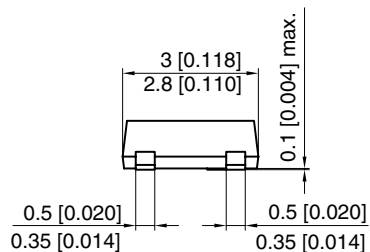


foot print recommendation:

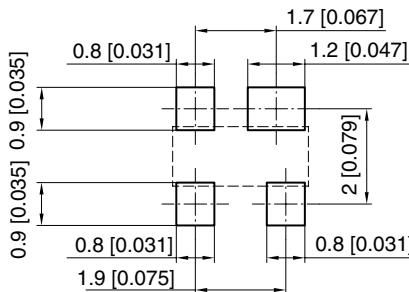


96 12240
Rev. 5 - Date: 25 January 2005
Document no.: 6.541-5015.01-4

Package Dimensions in mm (Inches): SOT143R




foot print recommendation:

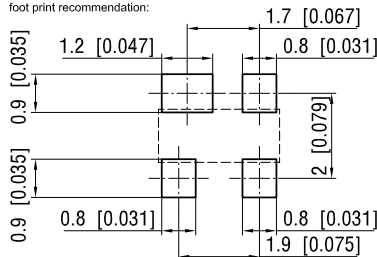


96 12239
Rev. 5 - Date: 25 January 2005
Document no.: 6.541-5016.01-4



Package Dimensions in mm (Inches): SOT343

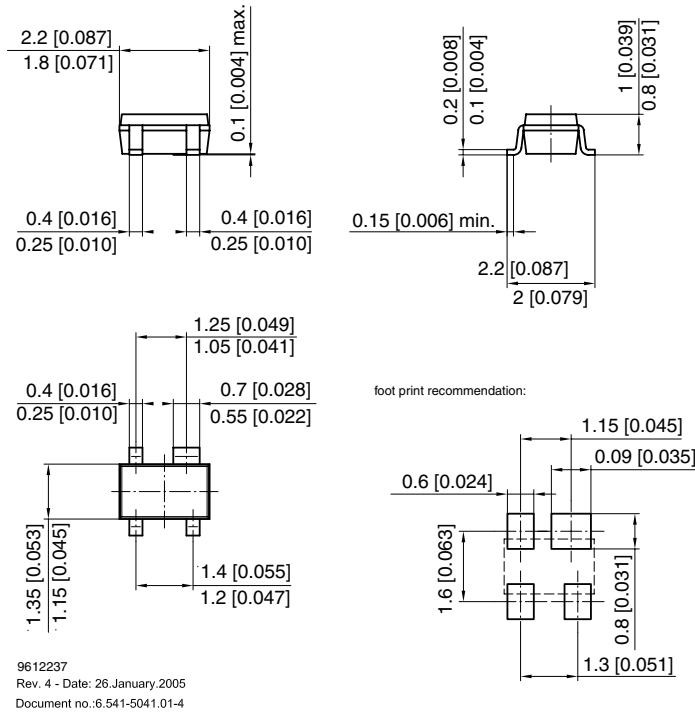

Package Dimensions in mm (Inches): SOT343R

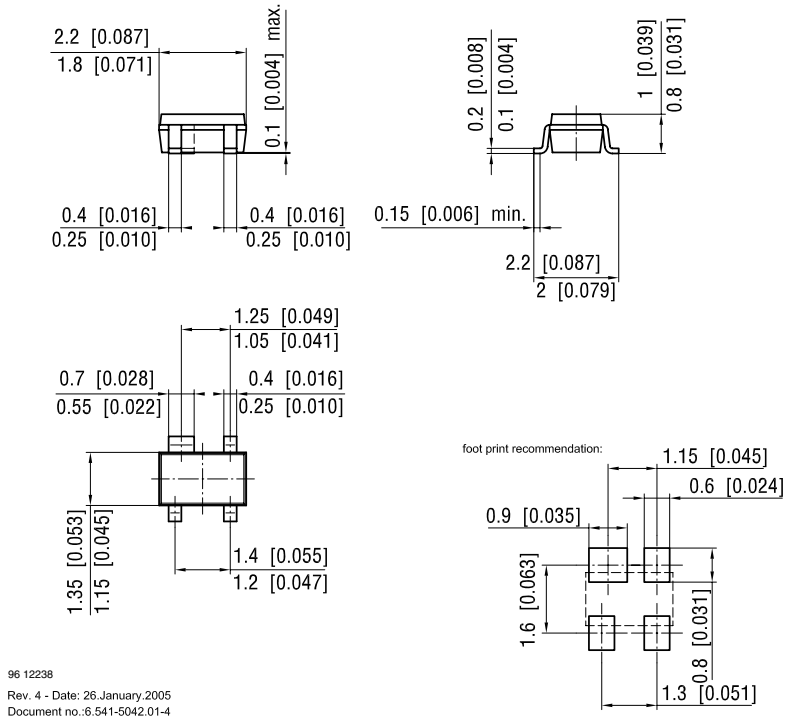



Ozone Depleting Substances Policy Statement

It is the policy of Vishay Semiconductor GmbH to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design
and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.