


STLZ950/..F-5.08-V-GREEN



Technical Data

Wire Sizes	Insulating Material
Solid min -	Material PA 6.6
Solid max -	Flammability Class UL 94 V-0
Stranded (flexible) -	Temperatures
min	Operating Temperature -30 °C - 105 °C
Stranded (flexible) -	Wave Soldering Process
max	Soldering Temperature, recommended 265 °C
Stranded with Ferrule -	Peak Soldering Time, recommended 3-4 s
min	Reflow Process
Stranded with Ferrule -	Soldering Temperature, recommended -
max	Peak Soldering Time, recommended -
Dimensions	
Stripped Length	
PCB Hole Diameter 1.4 mm	
Materials	
Flansch Brass	
Gewindeinsatz	
Contact Pin Copper Alloy	


Colours

GREEN	RAL6018	
BASALT GREY	RAL7012	
LIGHT GREEN	similar RAL 6018	

Colours according to RAL, there may be variations on colour due to production conditions. Special colours on request.

Counterparts (Spacing 5.08 mm)

Pin Strip/Terminal Blocks				
AKZ950	AKZ4951	AKZ1110	AKZ1100	AKZ1200

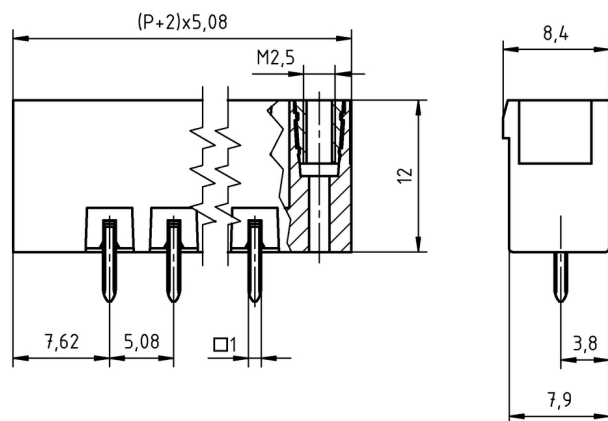

Order Data (Spacing mm)

Poles	Width (mm)	Article Designation	Article Number	PU
2	20.32	STLZ950/2F-5.08-V-GREEN	50950026121E	100
3	25.40	STLZ950/3F-5.08-V-GREEN	50950036121E	100
4	30.48	STLZ950/4F-5.08-V-GREEN	50950046121E	100
5	35.56	STLZ950/5F-5.08-V-GREEN	50950056121E	100
6	40.64	STLZ950/6F-5.08-V-GREEN	50950066121D	50
7	45.72	STLZ950/7F-5.08-V-GREEN	50950076121D	50
8	50.80	STLZ950/8F-5.08-V-GREEN	50950086121D	50
9	55.88	STLZ950/9F-5.08-V-GREEN	50950096121D	50
10	60.96	STLZ950/10F-5.08-V-GREEN	50950106121D	50
11	66.04	STLZ950/11F-5.08-V-GREEN	50950116121D	50
12	71.12	STLZ950/12F-5.08-V-GREEN	50950126121D	50
13	76.20	STLZ950/13F-5.08-V-GREEN	50950136121D	50
14	81.28	STLZ950/14F-5.08-V-GREEN	50950146121D	50
15	86.36	STLZ950/15F-5.08-V-GREEN	50950156121D	50
16	91.44	STLZ950/16F-5.08-V-GREEN	50950166121D	50
17	96.52	STLZ950/17F-5.08-V-GREEN	50950176121D	50
18	101.60	STLZ950/18F-5.08-V-GREEN	50950186121D	50
19	106.68	STLZ950/19F-5.08-V-GREEN	50950196121D	50
20	111.76	STLZ950/20F-5.08-V-GREEN	50950206121D	50
21	116.84	STLZ950/21F-5.08-V-GREEN	50950216121D	50
22	121.92	STLZ950/22F-5.08-V-GREEN	50950226121D	50
23	127.00	STLZ950/23F-5.08-V-GREEN	50950236121D	50
24	132.08	STLZ950/24F-5.08-V-GREEN	50950246121D	50

Accessories

Figure	Designation	Article Number
	Coding star CS2-5.0/5.08-RED	50000000024
	Dividing element SE-STL950-GREEN	50950000002



Ratings



Usegroup	B	C	D	
Rated Voltage	300 V	150 V	300 V	250 V
Rated Current	15 A	15 A	10 A	12 A
Overtoltage Category				III
Test Voltage	1.6 kV	1.6 kV	1.6 kV	4.0 kV
Pollution Degree				3