


PARAMETER		UNITS
Primary Impedance	600	Ω
Secondary Impedance	600	Ω
Longitudinal Balance 200 - 4000Hz @ 0dBm	50dB min.	
Primary DC Resistance	68	Ω Max.
Secondary DC Resistance	102	Ω Max.
Frequency Response 200 - 4000Hz	± 0.2	dB
Insertion Loss	2.0 Max. @ 1kHz	dB
Isolation (HI-POT)	1000	V _{RMS}
Primary DC	None	
Total Harmonic Distortion @ 400 Hz & 0 dBm	50 Min.	dB
Return Loss	18 min. 200 Hz to 4kHz 20 min. 300Hz to 4 KHz	dB dB


T-735

600 Ω Audio Transformer


SCHMATIC DIAGRAM:



**Physical Dimensions
in inches (mm)**

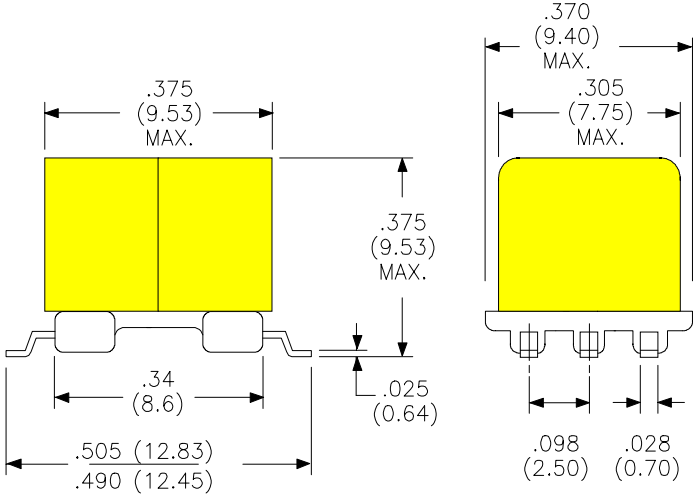

FOOTPRINT

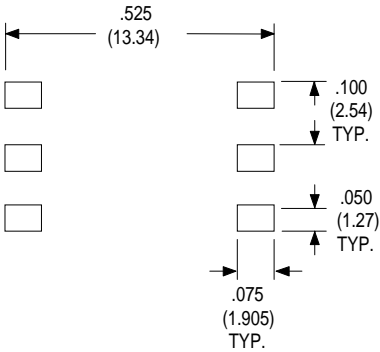

RHOMBUS INDUSTRIES INC.	
FSCM NO. 16714	
RHOMBUS P/N: T-735	
CUST P/N:	NAME:
DATE: 9/30/96	SHEET: 1 OF 1