


FC Patchcord

Description:

The FC connectors are designed and manufactured according JIS, IEC, EIA/TIA and ANSI specifications for intermateability and optical performance. The FC connectors are offered in MM or SM performances, with PC and APC polishing method.

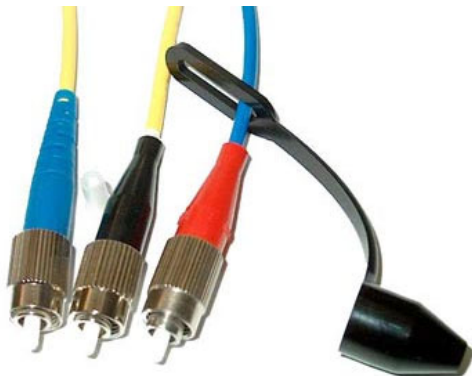

Features:

- Pull proof
- Meets FC connector standard
- Available both standards:
 - NPC205 - Methode, Seikoh Giken, JDSU
 - NPC215 – Seiko Instruments
- Pre-radiused ceramic ferrules configured for Super, Ultra, PC and APC polishing
- Pre-assembled option simplifies field termination
- Ferrule assembly has high resolution tuning feature
- Dust cover

Specifications:

Insertion loss (IL)	typ. 0.15 dB
Return loss (RL)	> 60 dB for jumper length up to 5 m
Strain relief	300 N
Operating temperature	-40°C to +80°C, conditioned by type of cable
Durability	min 1000 cycles
Assembly procedure	glue and polish
Connection	physical contact
Lock mechanism	coupling nut
Standards	JIS 5970, EIA/TIA FOCIS, CENELEC

Material

Coupling Nut	stainless steel
Rear Body	zinc alloy, nickel plated
Ferrule Material	full ceramic zirconia
Crimp Sleeve	brass, tin plated
Boot and Dust Cover	thermoplastic rubber (flame retardant)


Applications:

- Telecom
- LAN, WAN
- CATV, sensor systems, measuring technique
- Utilities, railways

Ordering code:

AAA		XX XX		X	XXX																																		
<table><tr><th>AAA Connector Type</th><th>Connector Description</th></tr><tr><td>PC</td><td>FC/PC (MM)</td></tr><tr><td>SPC</td><td>FC/SPC</td></tr><tr><td>UPC</td><td>FC/UPC</td></tr><tr><td>NPC205</td><td>FC/APC standard JDSU, Methode, Seikoh Giken</td></tr><tr><td>NPC215</td><td>FC/APC standard Seiko Instruments</td></tr></table>		AAA Connector Type	Connector Description	PC	FC/PC (MM)	SPC	FC/SPC	UPC	FC/UPC	NPC205	FC/APC standard JDSU, Methode, Seikoh Giken	NPC215	FC/APC standard Seiko Instruments				<table><tr><td>XXX</td><td>- length [m]</td></tr></table>	XXX	- length [m]																				
		AAA Connector Type	Connector Description																																				
PC	FC/PC (MM)																																						
SPC	FC/SPC																																						
UPC	FC/UPC																																						
NPC205	FC/APC standard JDSU, Methode, Seikoh Giken																																						
NPC215	FC/APC standard Seiko Instruments																																						
XXX	- length [m]																																						
<table><tr><th colspan="2">X - type (pigtail or jumper)</th></tr><tr><td>J</td><td>jumper</td></tr><tr><td>P</td><td>pigtail</td></tr></table>		X - type (pigtail or jumper)		J	jumper	P	pigtail																																
X - type (pigtail or jumper)																																							
J	jumper																																						
P	pigtail																																						
		<table><tr><th colspan="2">XX - diameter of cable, fibre</th></tr><tr><td>09</td><td>fibre Ø 0.9 mm</td></tr><tr><td>17</td><td>cable Ø 1.7 mm</td></tr><tr><td>20</td><td>cable Ø 2.0 mm</td></tr><tr><td>24</td><td>cable Ø 2.4 mm</td></tr><tr><td>28</td><td>cable Ø 2.8 mm</td></tr><tr><td>RF</td><td>ribbon fibre</td></tr><tr><td>RC</td><td>ribbon cable</td></tr></table>		XX - diameter of cable, fibre		09	fibre Ø 0.9 mm	17	cable Ø 1.7 mm	20	cable Ø 2.0 mm	24	cable Ø 2.4 mm	28	cable Ø 2.8 mm	RF	ribbon fibre	RC	ribbon cable	<table><tr><th colspan="2">XX - type of fibre</th></tr><tr><td>M5</td><td>MM 50/125 µm</td></tr><tr><td>M6</td><td>MM 62.5/125 µm</td></tr><tr><td>SM</td><td>SM 9/125 µm (G.652)</td></tr><tr><td>DS</td><td>dispersion shifted</td></tr><tr><td>TW</td><td>TrueWave</td></tr><tr><td>RS</td><td>TrueWave - RS</td></tr><tr><td>TL</td><td>TeraLight</td></tr><tr><td>LE</td><td>Leaf</td></tr></table>		XX - type of fibre		M5	MM 50/125 µm	M6	MM 62.5/125 µm	SM	SM 9/125 µm (G.652)	DS	dispersion shifted	TW	TrueWave	RS	TrueWave - RS	TL	TeraLight	LE	Leaf
XX - diameter of cable, fibre																																							
09	fibre Ø 0.9 mm																																						
17	cable Ø 1.7 mm																																						
20	cable Ø 2.0 mm																																						
24	cable Ø 2.4 mm																																						
28	cable Ø 2.8 mm																																						
RF	ribbon fibre																																						
RC	ribbon cable																																						
XX - type of fibre																																							
M5	MM 50/125 µm																																						
M6	MM 62.5/125 µm																																						
SM	SM 9/125 µm (G.652)																																						
DS	dispersion shifted																																						
TW	TrueWave																																						
RS	TrueWave - RS																																						
TL	TeraLight																																						
LE	Leaf																																						

Dimensions:

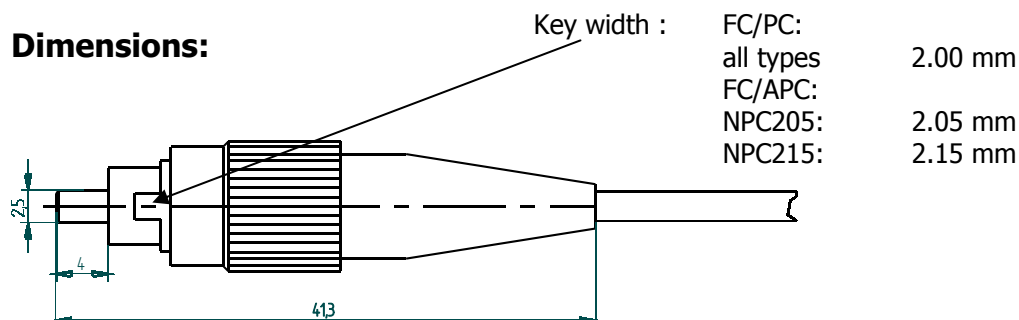

Samples:

PC-28 M6-J-003



SPC-28 SM-P-002

