
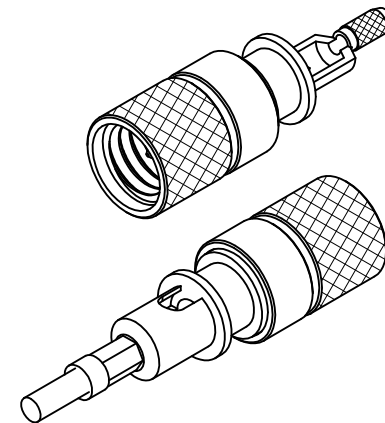


MATERIALS AND FINISHES:

- COUPLING NUT BRASS
PLATED GOLD
- BODY BRASS
PLATED GOLD
- INSULATOR TEFLON
- GASKET SILICONE RUBBER
- C-RING BERYLLIUM COPPER

CONTACT BRASS
PLATED GOLD

CRIMP TUBE BRASS
PLATED GOLD

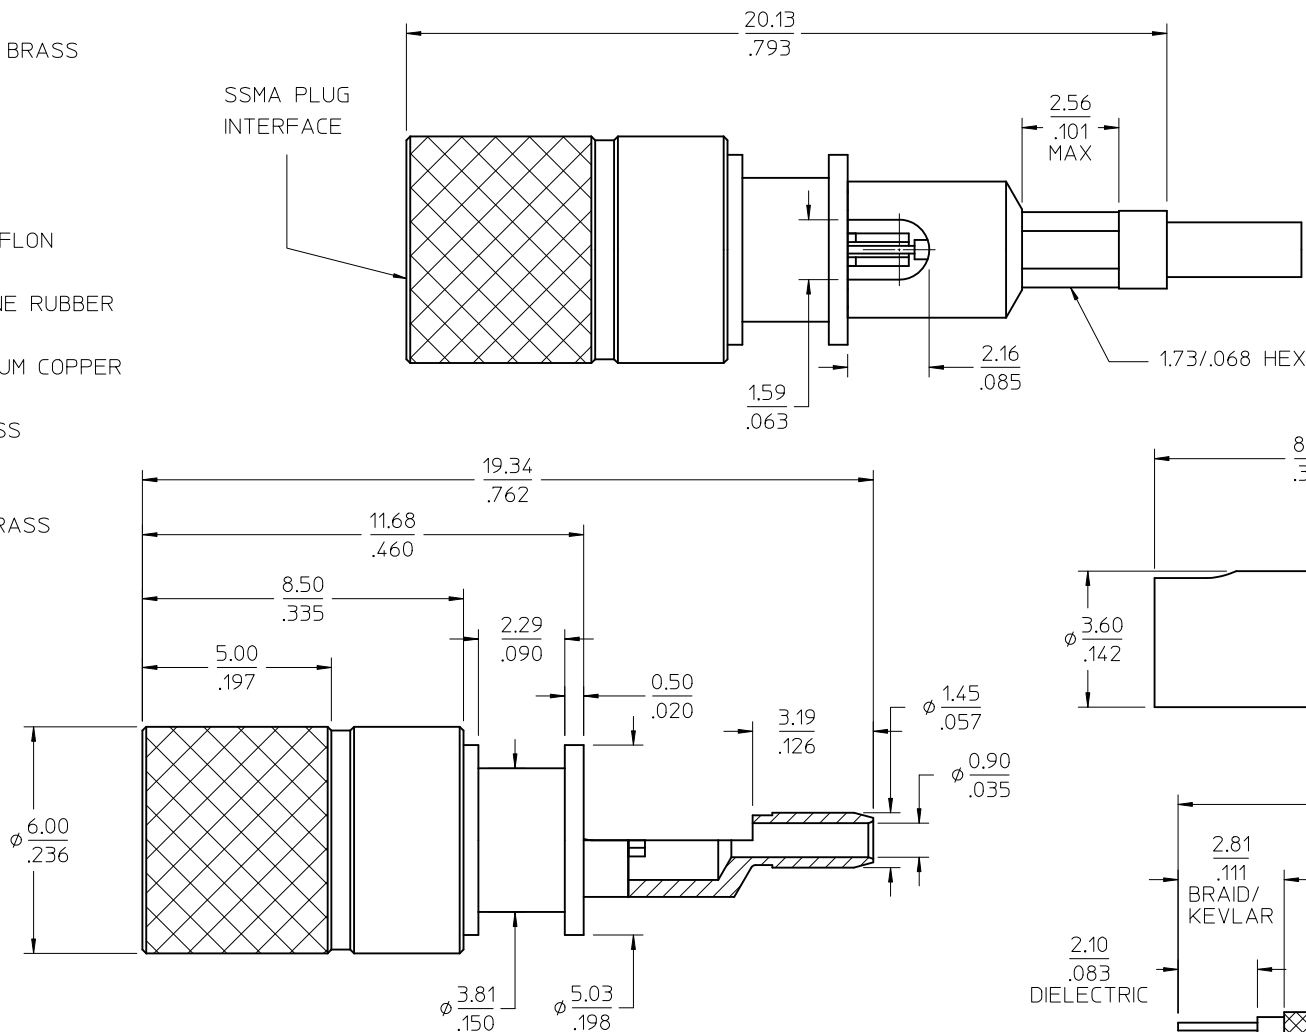

PART # 73260-0000

RECOMMEND CABLE STRIP DIMENSION
(SOLDER CONDUCTOR TO CONTACT AND
BRAID TO BODY - CRIMP KEVLAR BRAID
BETWEEN CRIMP TUBE AND BODY)

MIL-STD-348A, FIG. 319.1	SSMA PLUG INTERFACE
SPECIFICATION	DESCRIPTION

CHG: 2.56 MAX WAS
4.19 MAX, 8.45 WAS
11.98, 3.81 WAS 7.34
8.37 WAS 9.99
19.34 WAS 20.97
20.13 WAS 23.66
3.19 WAS 4.82
REMOVED Ø1.27 AND
6.61 (HOLE)
EC NO: URF2011-0638
2011/04/29
DRWN:SSHAH
CHKD:AROBERTSON
2011/04/29
APPR:JWIENER
2011/05/02

QUALITY
SYMBOLS
▽=0
▽=3

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .005	± .0005
2 PLACES	± .005	± .0005
1 PLACE	± .005	± .0005

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
SSHAH	2010/12/28

CHECKED BY	DATE
AROBERTSON	2011/01/26

APPROVED BY	DATE
JWIENER	2011/02/03

MATERIAL NO.
732600000

SIZE
C

SCALE
DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

TITLE
SSMA PLUG STR CABLE
50 OHMS EWR-4583
SSMA-PC

MOLEX INCORPORATED

DOCUMENT NO.
SD-73260-000

SHEET NO.
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION