


| REV. | DATE | DESCRIPTION |
|------|----------|--------------------------|
| NC | 12/29/00 | UPDATE PLATING TO SILVER |

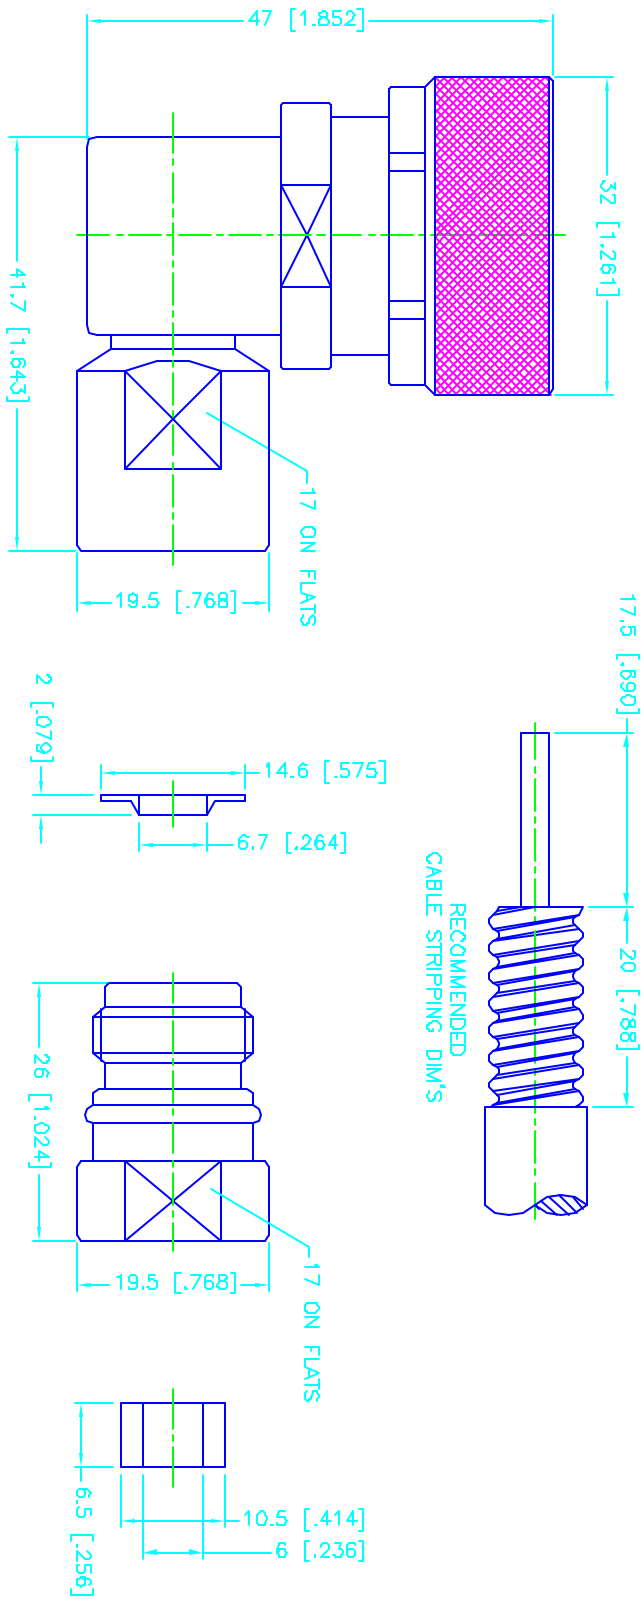

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QD-B-626
2. SILVER PL. 120 MIN. THICK OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QD-C-530.
4. SILVER PL. 200 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468

| DESCRIPTION | MATERIAL | FINISH | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY | APPROVALS | DATE | TITLE | SCALE | PART NO. | SHEET |
|---------------|-------------|---------|--|----------------------|----------|--|-------|----------|--------|
| 1 BODY | BRASS | SILVER | UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 ± 0.2 6-30 ± 0.4 30-120 ± 0.6 120-375 ± 1 375-1000 ± 1.6 1000-2000 ± 2.4 | DRAWN | 12/29/00 | Comnex Connector Corporation 7/16 R/A CLAMP JACK (FOR ANDREW 3/8" FSJ2-50 SUPERFLEX CABLE) | A | 99001 | 272136 |
| 2 INSULATOR | TEFLON | NATURAL | | CHECKED | | | | | |
| 3 CONTACT PIN | BER. COPPER | SILVER | | ISSUED | | | | | |
| 4 COVER | P.E. | BLUE | | | | | | | |
| 5 | | | | | | | | | |
| 6 | | | | | | | | | |
| 7 | | | | | | | | | |
| 8 | | | | DO NOT SCALE DRAWING | | | | | |

| SIZE | FORM NO. | DWG. NO. | REV. |
|------|----------|------------|------|
| A | 99001 | 272136.DWG | A |

| SCALE | PART NO. | SHEET |
|-------|----------|--------|
| NA | 272136 | 1 OF 1 |