



BURNDY® Products FCI

Compression

TYPE FL FINGRIP™

FLAG-STYLE FEMALE QUICK DISCONNECT

MATERIAL: TIN-PLATED
BRASS

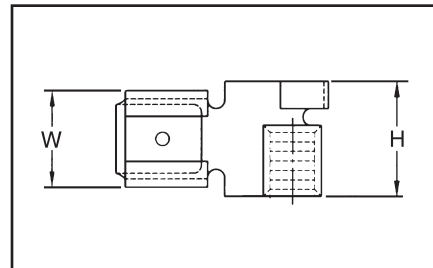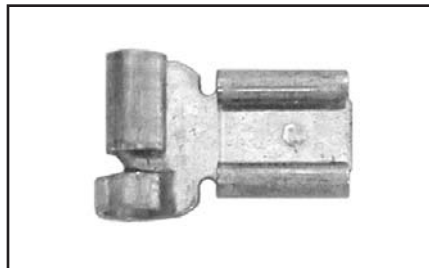

Features and Benefits

- Dimpled female socket detent.
- ◊ Ensures firm grip.



FEMALE BARE DISCONNECT TERMINAL

STANDARD CATALOG NO.	STD. PKG. QTY.	WIRE RANGE	NEMA TAB SIZE	DIMENSIONS			BULK CATALOG NO.	BULK PKG. QTY.	INSTALLATION TOOL
				A	B	W			
FL1825X03D	100	18-22	.250 × .032	0.67	0.17	0.25	FL1825X03B	1000	Consult Factory
FL1425X03D	100	14-16	.250 × .032	0.67	0.17	0.25	FL1425X03B	1000	
FL1025X03D *	50	10-12	.250 × .032	0.67	0.17	0.25	FL1025X03B	500	

* Not UL listed or CSA approved.