
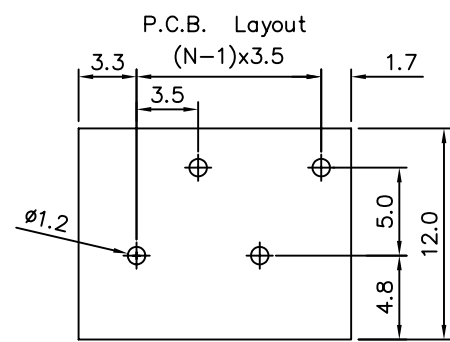
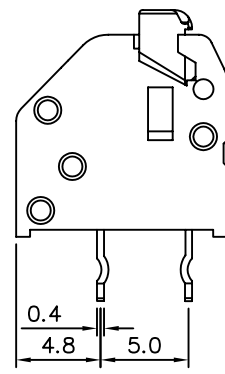


SPECIFICATIONS
 Contact(Metal Housing):Phosphor Bronze
 Surface Of Solder Tail: Tin Plated
 Insulator Body(Housing):Polyamide(Glass Filled)
 (UL 94V-0)
 Voltage Rating: 350VAC
 Current Rating: 5 Amps/Way Max.
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Wire Range: 16~20AWG
 Operating Temperature: -55°C To +105°C
 Test Temperature: 250°C, 5 Seconds Max.

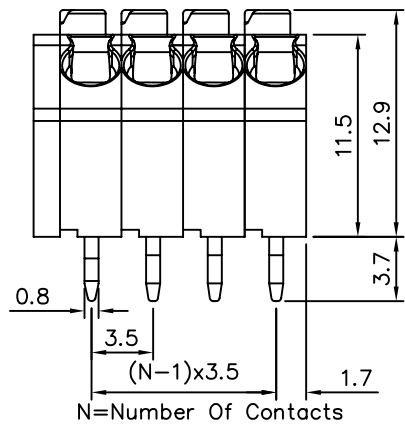

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.10 ANG.					
PART No. TBX35XC		MEI							
DRAWING No. TBX35XC		CHECKED BY BECKY							
		DRAWING BY TCF							
SCALE	NONE	REV.	A0	UNIT mm	⊕	△ A0	NEW RELEASE	BECKY	12/09/2004
						NO. REV.	REVISIONS	CHK	DATE