

MMQ-40125HM

GaAs MMIC Millimeter Wave 4x Multiplier

DEVICE OVERVIEW

General Description

Q-40125H is a MMIC millimeter wave 4x multiplier fabricated with GaAs Schottky diodes. MMQ-40125H operates over a 10 to 31.25 GHz input frequency range or a quadrupled output frequency range of 40 to 125 GHz. Operation past 125GHz is pending verification. Contact factory for information. MMQ-40125H is available as a connectorized coaxial module using 1.0 mm connectors on the output. Wire bondable die are also available.




Features

- Low loss die and package
- Up to 125GHz 4th harmonic output tone
- Convenient +0 dBm output level
- Coax connector module

Applications

- mmWave frequency synthesis
- LO signal chain for mmWave mixers

Functional Block Diagram



Part Ordering Options

Part Number	Description	Package	Connectors	Green Status	Product Lifecycle	Export Classification
MMQ-40125HM	GaAs MMIC Millimeter Wave 4x Multiplier	M	<u>Standard</u>	RoHS REACH REACH	Released	3A001.b.7.b.1

Table Of Contents

■ Device Overview	■ Specifications
General Description	Absolute Maximum Ratings
Features	Package Information
Applications	Recommended Operating Conditions
Functional Block Diagram	Sequencing Requirements
	Electrical Specifications
■ Port Configuration and Functions	Typical Performance Plots
Port Diagram	
Port Functions	■ Mechanical Data
	Outline Drawing
■ Revision History	


Revision History

Revision Code	Revision Date	Comment
-	2020-10-01	Initial Datasheet Release
A	2021-06-01	Export Classification Updated




Port Configuration and Functions

Port Diagram

The MMQ-40125H should only be used in the forward direction, with the input and output ports given in Port Functions.

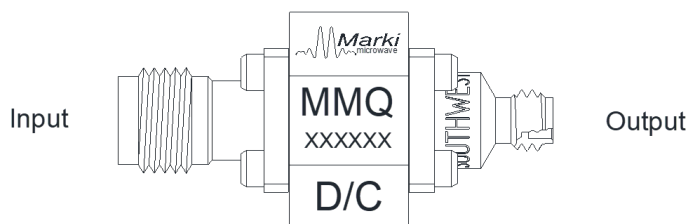

Port Functions

Port	Function	Connector Type	Description	Equivalent Circuit for Package
GND	Ground	-	M package ground provided through metal housing and outer coax conductor.	
Port 1	Input	1.85F	Input 1x Frequency Port. Port 1 is DC coupled to the diodes for the CH and M packages. Blocking capacitor is optional.	
Port 2	Output	1.0F	2x Input Frequency output port. Port 2 is DC open for the CH and M package.	

MMQ-40125HM

GaAs MMIC Millimeter Wave 4x Multiplier

Specifications

Absolute Maximum Ratings

The Absolute Maximum Ratings indicate limits beyond which damage may occur to the device. If these limits are exceeded, the device may be inoperable or have a reduced lifetime.

Parameter	Maximum Rating	Unit
Maximum Operating Temperature	100	°C
Maximum Storage Temperature	125	°C
Minimum Operating Temperature	-55	°C
Minimum Storage Temperature	-65	°C
Port 1 DC Current	25	mA
Power Handling, at any Port	25	dBm

Package Information

Parameter	Details	Rating
ESD	250 to < 500 Volts	HBM Class 1A
Weight	Package name: M	15g
Dimensions	-	28.81 x 14.30 mm

Recommended Operating Conditions

The Recommended Operating Conditions indicate the limits, inside which the device should be operated, to guarantee the performance given in Electrical Specifications. Operating outside these limits may not necessarily cause damage to the device, but the performance may degrade outside the limits of the electrical specifications. For limits, above which damage may occur, see Absolute Maximum Ratings.

Parameter	Min	Nominal	Max	Unit
Input Power	-	20	23	dBm
Ambient Temperature	-55	25	100	°C

Sequencing Requirements

There is no requirement to apply power to the ports in a specific order. However, it is recommended to provide a 50Ω termination to each port before applying power. This is a passive diode doubler that requires no DC bias.

Electrical Specifications

The electrical specifications apply at TA=+25°C in a 50Ω system. Typical data shown is for the connectorized M package quadrupler used in the forward direction with a nominal +20 dBm sine wave input. Min and Max limits apply only to our connectorized units and are guaranteed at TA=+25°C. RF testing of our die is performed on a sample basis to verify conformance to datasheet guaranteed specifications.

Parameter	Test Conditions	Minimum Frequency (GHz)	Maximum Frequency (GHz)	Min	Typ	Max	Unit
4F Conversion Loss	Input = 10 - 12.5 GHz Output = 40 - 50 GHz	-	-	-	28	-	dB
4F Conversion Loss	Input = 12.5 - 15 GHz Output = 50 - 60 GHz	-	-	-	23	-	dB
4F Conversion Loss	Input = 15 - 27.5 GHz Output = 60 - 110 GHz	-	-	-	20	23	dB
4F Conversion Loss	Input = 27.5 - 31.25 GHz Output = 110 - 125 GHz	-	-	-	25	-	dB
4F Output Power	Input = 10 - 12.5 GHz Output = 40 - 50 GHz	-	-	-	-8	-	dBm
4F Output Power	Input = 12.5 - 15 GHz Output = 50 - 60 GHz	-	-	-	-3	-	dBm
4F Output Power	Input = 15 - 27.5 GHz Output = 60 - 110 GHz	-	-	-3	0	-	dBm
4F Output Power	Input = 27.5 - 31.25 GHz Output = 110 - 125 GHz	-	-	-	-5	-	dBm
Input Frequency Range	-	-	-	10	-	31.25	GHz
Input Power	-	-	-	-	20	23	dBm
Isolation, 1F ¹	Input = 10 - 31.25 GHz Output = 10 - 31.25 GHz	-	-	-	41	-	dB
Isolation, 2F ²	Input = 10 - 31.25 GHz Output = 20 - 62.5 GHz	-	-	-	38	-	dB
Isolation, 3F ³	Input = 10 - 31.25 GHz Output = 30 - 93.75 GHz	-	-	-	34.5	-	dB
Output Frequency Range ⁴	-	-	-	40	-	125	GHz
Suppression, 1F ⁵	Input = 10 - 31.25 GHz Output = 10 - 31.25 GHz	-	-	-	19	-	dBc
Suppression 2F ⁶	Input = 10 - 31.25 GHz Output = 20 - 62.5 GHz	-	-	-	17	-	dBc
Suppression, 3F ⁷	Input = 10 - 31.25 GHz Output = 30 - 93.75 GHz	-	-	-	12	-	dBc

[1][2][3] Isolation is defined as the harmonic power relative to the 1F fundamental input power.

[4] Output return loss measured with a fixed frequency large signal 31.25 GHz input.

[5] Suppressions and isolations figures reported include measurement amplifier's harmonic's leakage tones.









Suppression is defined as the harmonic power relative to the 4F quadrupled output power

[6][7] Suppressions and isolations figures reported include measurement amplifier's harmonic's leakage tones. Suppression is defined as the harmonic power relative to the 4F quadrupled output power.

MMQ-40125HM








GaAs MMIC Millimeter Wave 4x Multiplier

Typical Performance Plots

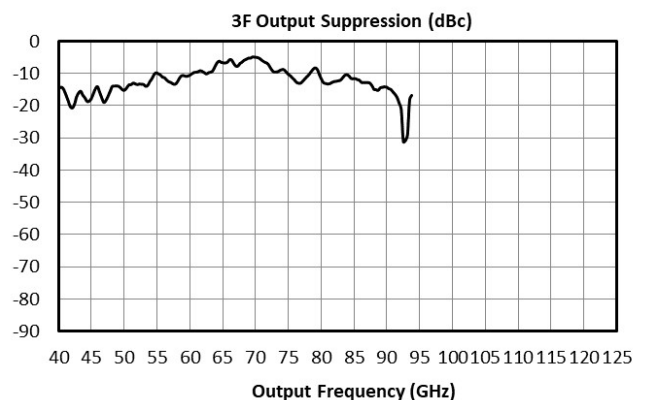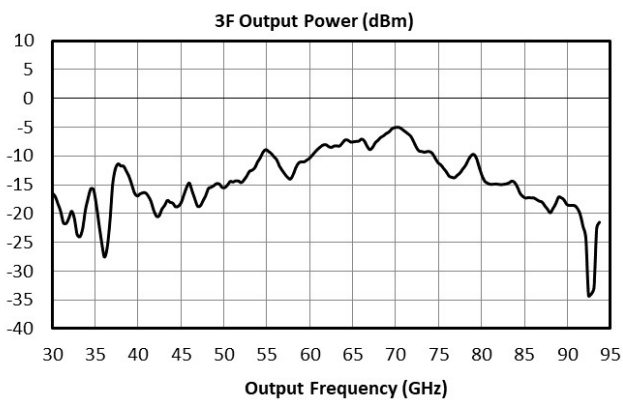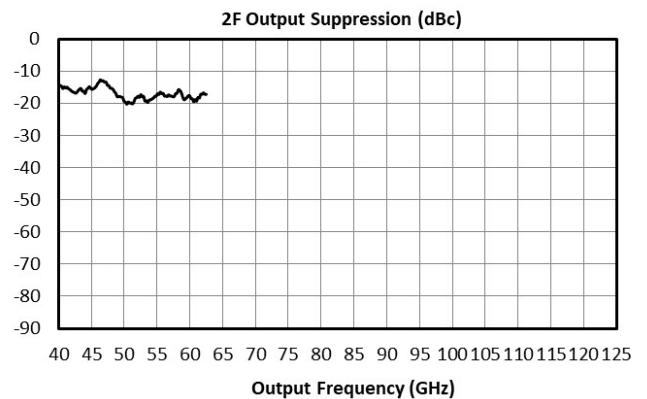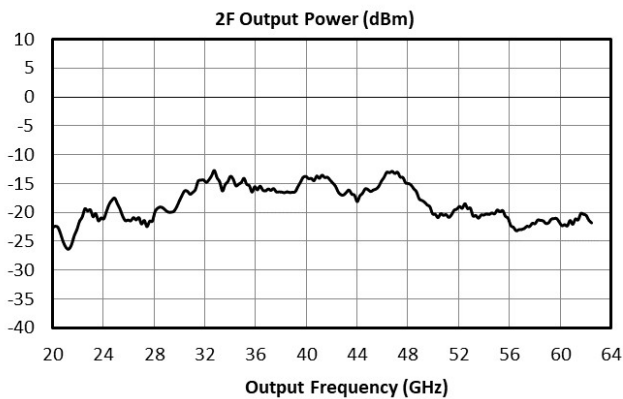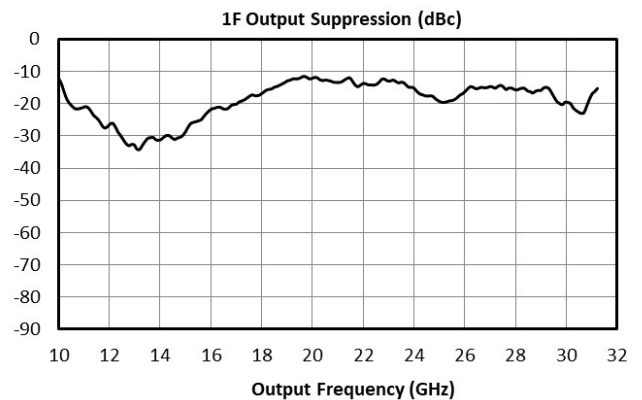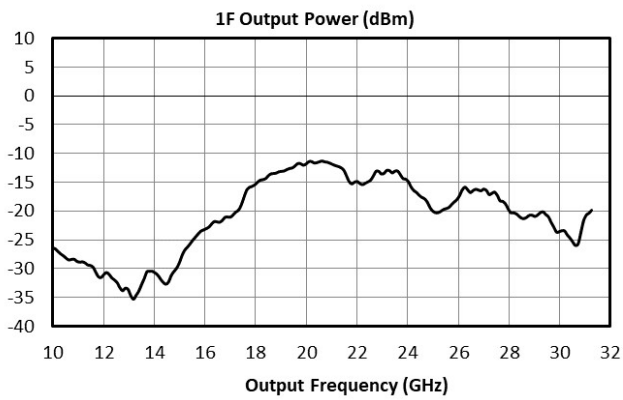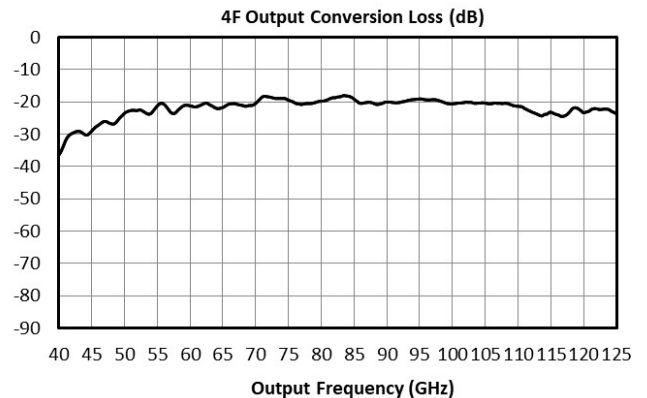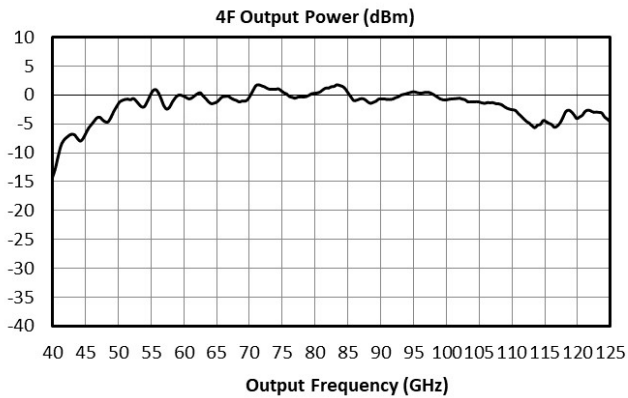

MMQ-40125HM

GaAs MMIC Millimeter Wave 4x Multiplier

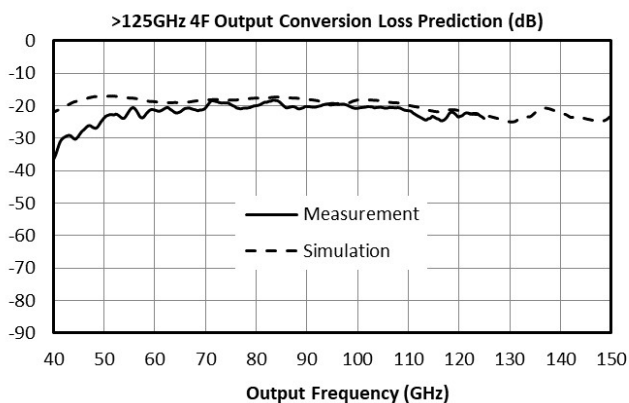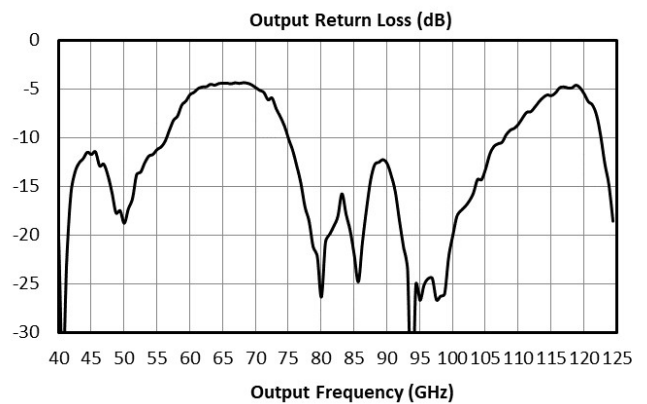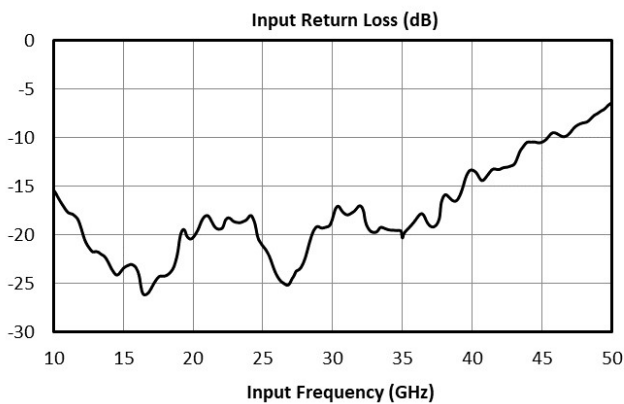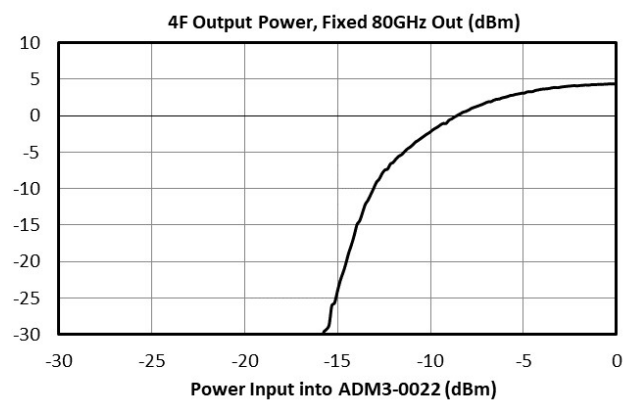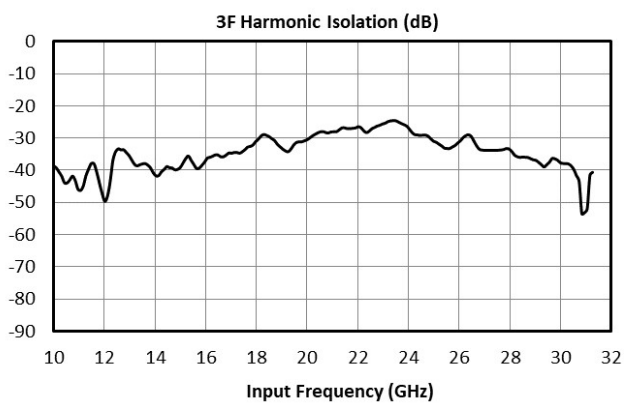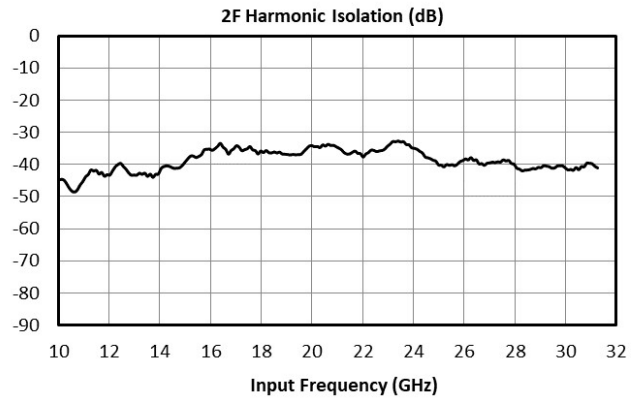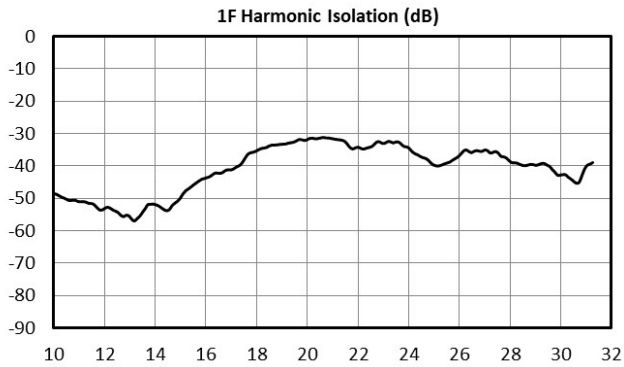


MMQ-40125HM


GaAs MMIC Millimeter Wave 4x Multiplier

Mechanical Data


Outline Drawing

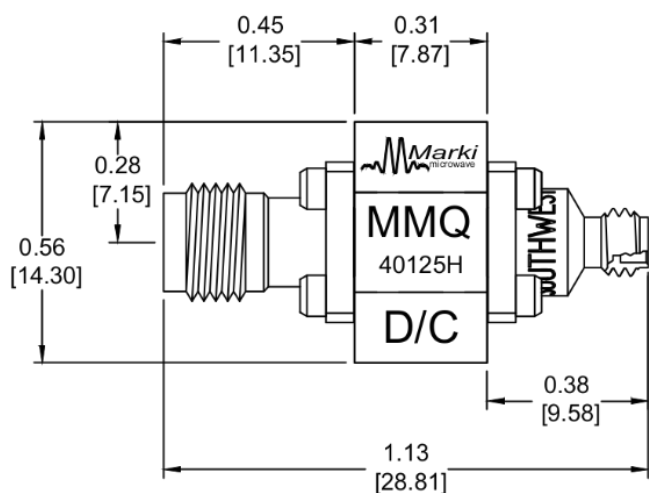

Bottomside View

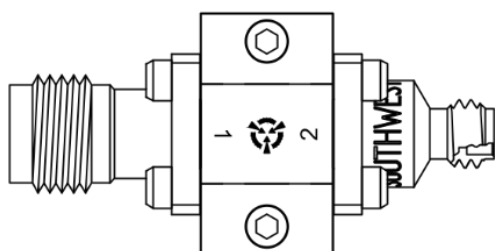

Topside View

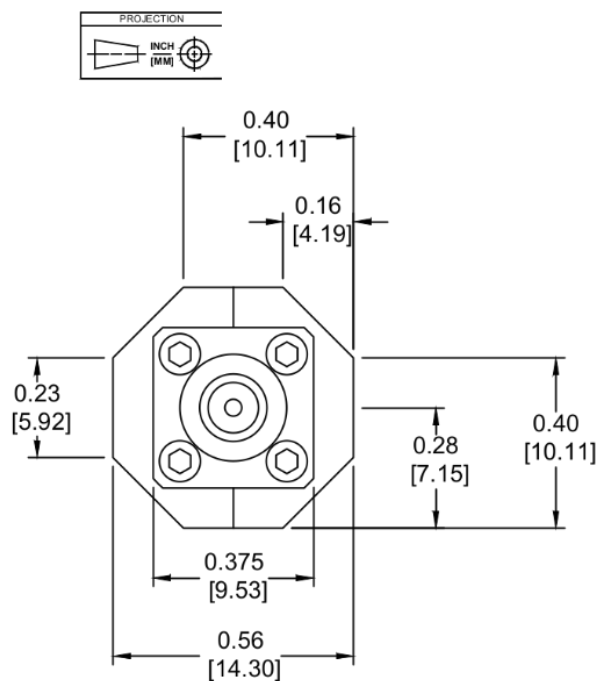

1.0 mm Connector View

Note: Connectors are not removeable. Do not attempt replacing.

Port	Connector Type
1	1.85 mm Female
2	1.0 mm Female

DISCLAIMER

MARKI MICROWAVE, INC., ("MARKI") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. MARKI DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art designing with Marki products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. Marki makes no guarantee regarding the suitability of its products for any particular purpose, nor does Marki assume any liability whatsoever arising out of your use or application of any Marki product. Marki grants you permission to use these resources only for development of an application that uses Marki products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Marki intellectual property or to any third-party intellectual property. Marki reserves the right to make changes to the product(s) or information contained herein without notice.

MARKI MICROWAVE and T3 MIXER are trademarks or registered trademarks of Marki Microwave, Inc. All other trademarks used are the property of their respective owners.

© 2020 - 2021, Marki Microwave, Inc