
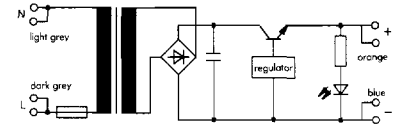
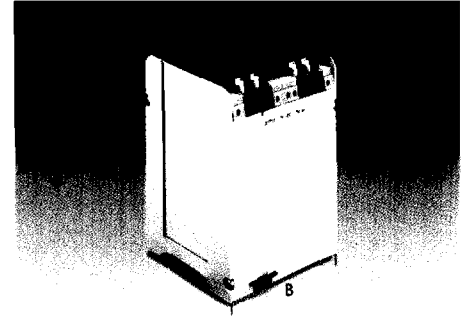
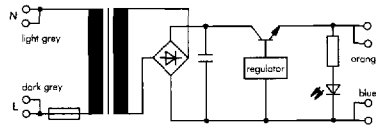
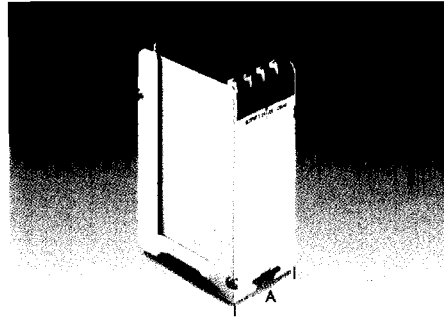


2 Power Supply Units in DIN-Rail-mountable Enclosure

106

	120 V AC/5; 12; 15; 24 V DC 0.25 A 230 V AC/5; 12; 15; 24 V DC 0.25 A with electronic short circuit protection LED output voltage indication	120 V AC/5; 12; 15; 24 V DC 1 A 230 V AC/5; 12; 15; 24 V DC 1 A with electronic short circuit protection LED output voltage indication
	Module width 45 mm / 1.772 in	Module width 79 mm / 3.11 in

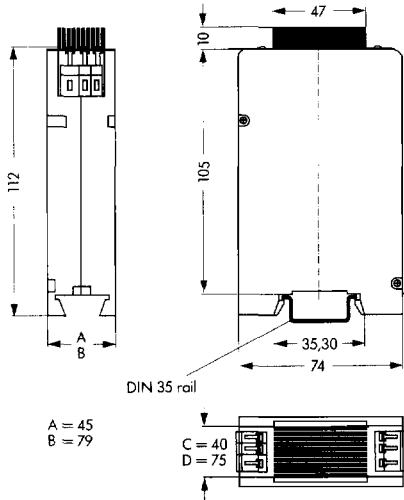

Description	Item-No.	Item-No.	Pack.-unit pcs	Item-No.	Item-No.	Pack.-unit pcs
Power supply unit,	120 V AC	230 V AC		120 V AC	230 V AC	
CAGE CLAMP	787-800	787-810	1	787-806	787-816	1
terminal blocks, series 257,	5 V DC / 0.25 A	5 V DC / 1 A				
0.08 - 2.5 mm ² /AWG 28 - 12	12 V DC / 0.25 A	12 V DC / 1 A		787-804	787-814	1
stripped length	12 V DC / 1 A	15 V DC / 0.25 A		787-807	787-817	1
5 - 6 mm / 0.22 in	15 V DC / 0.25 A	15 V DC / 1 A		787-805	787-815	1
	24 V DC / 0.25 A	24 V DC / 1 A				

Technical data

	120 V AC	230 V AC	120 V AC	230 V AC
Nominal input	120 V AC	230 V AC	120 V AC	230 V AC
Tolerance	± 10 %	± 10 %	± 10 %	± 10 %
Frequency	60 Hz	60 Hz	60 Hz	60 Hz
Power consumption at nominal load				
	5 V DC	6 VA	16 VA	
	12 V DC	7 VA	21 VA	
	15 V DC	8 VA	26 VA	
	24 V DC	11 VA	60 VA	
Nominal output voltage	5 V DC; 12 V DC; 15 V DC; 24 V DC		5 V DC; 12 V DC; 15 V DC; 24 V DC	
Tolerance	± 5 %		± 5 %	
Nominal output current	0.25 A		1 A	
Residual ripple	≤ 100 mV _{SS}		≤ 100 mV _{SS}	
Input fuse	0.2 A fast acting	0.1 A	0.63 A fast acting	0.5 A
Output fuse	electronic, short circuit proof		electronic, short circuit proof	
Short-circuit current	1.3 A		1.3 A	
Ambient operating temperature	- 20°C / + 40°C		- 20°C / + 40°C	
Weight	0.41 kg		0.82 kg	
Transformer	acc. to VDE 0551		acc. to VDE 0551	
Dimensions	L x W x H (45 x 74 x 115*) mm		L x W x H (79 x 74 x 115*) mm	
	*from upper edge of DIN 35 rail		*from upper edge of DIN 35 rail	