


SD

## REVISIONS

ISSUE	CHANGES
0	ER 38383 HVN 08/15/01

3155-3-5

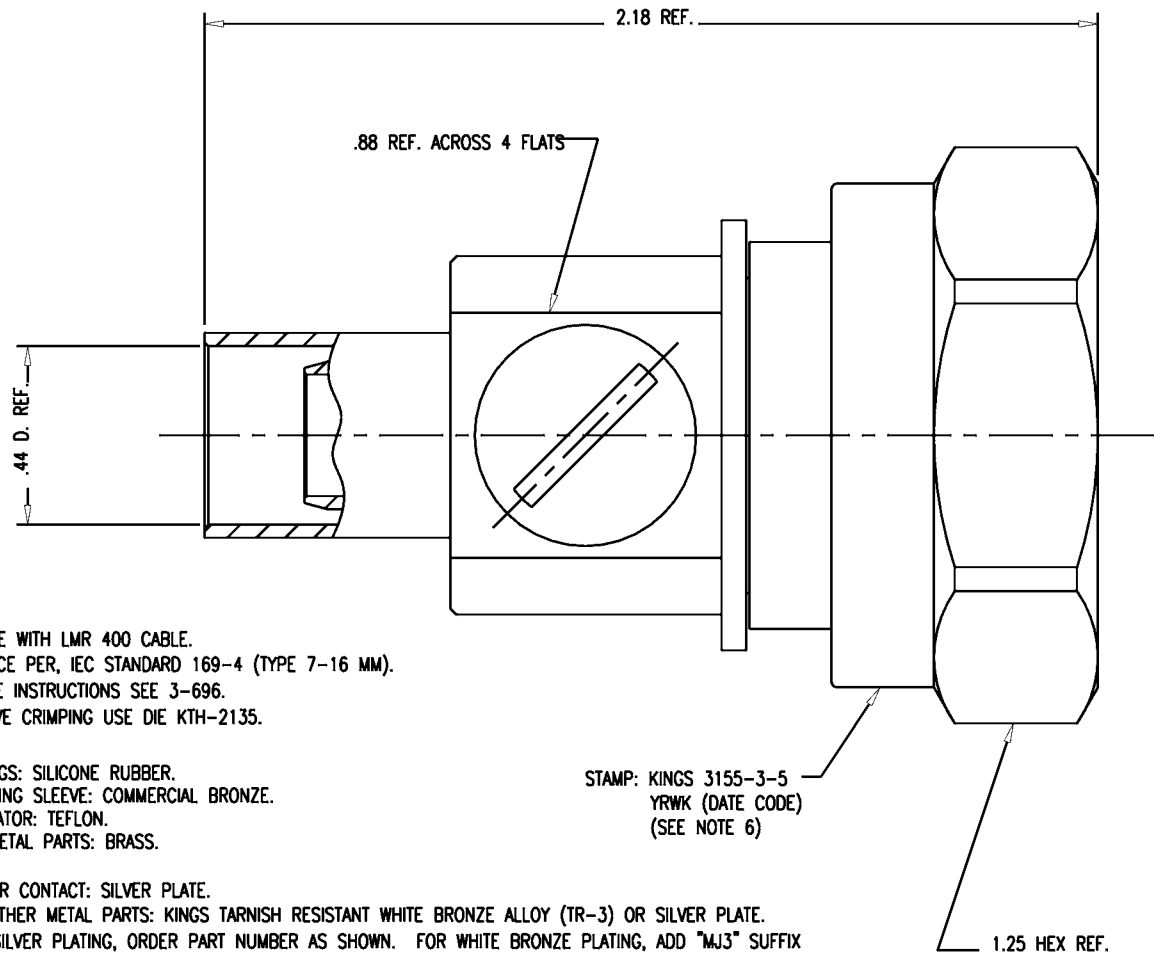

## NOTES:

- FOR USE WITH LMR 400 CABLE.
- INTERFACE PER, IEC STANDARD 169-4 (TYPE 7-16 MM).
- FOR CABLE INSTRUCTIONS SEE 3-696.
- FOR SLEEVE CRIMPING USE DIE KTH-2135.
- MATERIALS:  
O RINGS: SILICONE RUBBER.  
CRIMPING SLEEVE: COMMERCIAL BRONZE.  
INSULATOR: TEFLON.  
ALL METAL PARTS: BRASS.
- FINISHES:  
CENTER CONTACT: SILVER PLATE.  
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT WHITE BRONZE ALLOY (TR-3) OR SILVER PLATE.  
FOR SILVER PLATING, ORDER PART NUMBER AS SHOWN. FOR WHITE BRONZE PLATING, ADD "MJ3" SUFFIX TO THE PART NUMBER SHOWN, FOR EXAMPLE 3155-3-5 MJ3.
- ELECTRICAL CHARACTERISTICS:  
NOMINAL IMPEDANCE: 50 OHMS.  
FREQUENCY RANGE: DC TO 6.0 GHz.  
OPERATING VOLTAGE: 1700 VRMS.
- SUPPLIED WITH A 3 INCH LENGTH OF ADHESIVE SHRINK TUBING.

STAMP: KINGS 3155-3-5  
YRWK (DATE CODE)  
(SEE NOTE 6)

1.25 HEX REF.

3155-3-5S

SCALE 3:1

APPROX SURFACE AREA

WAS: E-19731

USED ON

REF:

7-16 PLUG (LMR 400)

DRAWN HVN DATE 03/08/01

DESIGN LI DATE 01/04/01

APPR. DATE

**KINGS**  
ELECTRONICS CO., INC.  
ROCK HILL, SOUTH CAROLINA 29730

3155-3-5

SD