

# UniCam® Secure Keyed LC Connector, 62.5 μm multimode (OM1)

Red

CORNING

Corning secure keyed LC connector solution offers mechanical network security for organizations desiring to segregate networks due to privacy or security concerns. Utilizing the LC small-form-factor (SFF) format for optical fiber cabling, the keyed LC solution provides physical separation for up to eight networks, applications, or organizations. Eight color-coded key combinations prevent inadvertent or unauthorized access to networks and provide fast and easy network identification. Keyed connectors on the front and back of the patch panel area are used to match access rights to the proper network. The keyed features cannot be duplicated with standard LC components, thereby preventing violation of network security.

## Features and Benefits

**Eight color-coded mechanical key positions**  
Prevents mismatch of networks

**Keyed connector solution**  
Front and rear security in network panel

**Broad operating temperature (-40° to +75°C)**  
Utility and flexibility

**Factory-polished end face**  
Consistent optical performance


**Fast termination and no consumables**  
Low installation cost

**Minimum insertion loss**  
Optimum optical performance

## Standards

**Approvals and Listings** Passed EIA/TIA 568-B.3

**Intermateability** Connectors are FOCIS compliant with TIA/EIA 604-10A and IEC61754-20

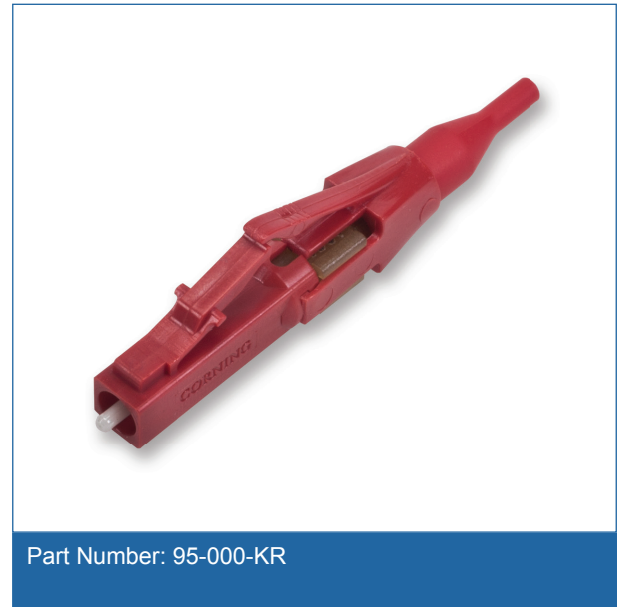

# UniCam® Secure Keyed LC Connector, 62.5 $\mu\text{m}$ multimode (OM1)

Red

CORNING

## Specifications

General Specifications	
Technology	No-Epoxy/No-Polish
Keyed	Yes
Product Type	Field-Installable Connectors
Corning Logo	Yes
Packaging	Single Pack
Fiber Category	62.5 $\mu\text{m}$ MM (OM1)

Temperature Range	
Operation	-40 °C to 75 °C exceeding EIA/TIA 568-B.3 (-40 °F to 167 °F exceeding EIA/TIA 568-B.3)

Design - Connector	
Connector Type	LC
Ferrule Material	Ceramic
Housing Material	Composite
Housing Color	Red
Boot Color	Red

Mechanical Specifications - Connector	
Durability	$\leq 0.2$ dB change by 500 rematings, FOTP-21
Tensile Strength Jacketed Cable	50 N, change $\leq 0.2$ dB, FOTP-6 (11 lb, change $\leq 0.2$ dB, FOTP-6)
Tensile Strength 900 $\mu\text{m}$ Cable	4.9 N, change $\leq 0.2$ dB, FOTP-6 (1.1 lb, change $\leq 0.2$ dB, FOTP-6)
Nominal Fiber Outer Diameter	125 $\mu\text{m}$

Optical Specifications - Connector	
Insertion Loss, Typical	0.3 dB
Insertion Loss, Maximum	0.75 dB
Reflectance	$\leq -26$ dB

# UniCam® Secure Keyed LC Connector, 62.5 μm multimode (OM1)

Red



## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

## Ordering Information

Part Number	95-000-KR
Product Description	UniCam® Secure Keyed LC Connector, 62.5 μm multimode (OM1), ceramic ferrule, single pack, red housing, red boot
EAN Code	4056418199795

## Shipping Information

Units per Delivery	1/1
Package Contents	Keyed connector, trigger, crimp band, boot (900 μm), boot (3.0 mm), boot (2.0 mm)



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

