

ELECTRICAL SPECIFICATIONS

TURNS RATIO :
(1-2-3):(6-4) : 1.8CT : 1 ±3%

INDUCTANCE :
(6-4) : 2.0 mH MIN. @ 0.1Vrms 10KHz

LEAKAGE INDUCTANCE:
6-4 WITH (1,2,3 SHORT) : 0.6 uH MAX. @ 1 MHz


INTERWINDING CAPACITANCE:
(1,2,3) TO (6,4) : 45 pf MAX.

D.C. RESISTANCE:
(1-3) = (6-4) : 0.9 OHMS MAX.





DIELECTRIC VOLTAGE WITHSTAND:
(1,3) TO (6,4) : 1500 VRMS

Electrical

(REV. X)



Mechanical

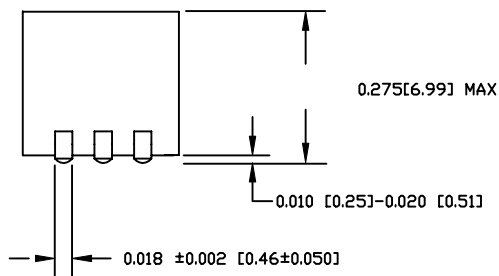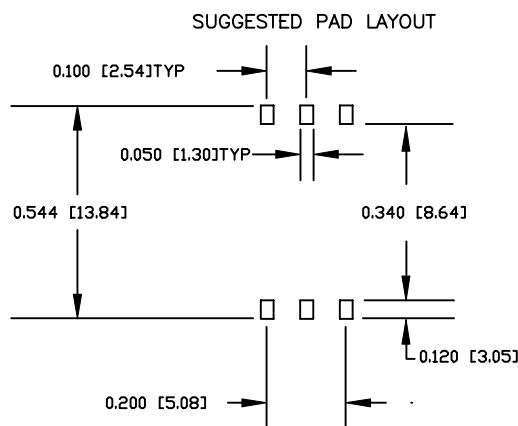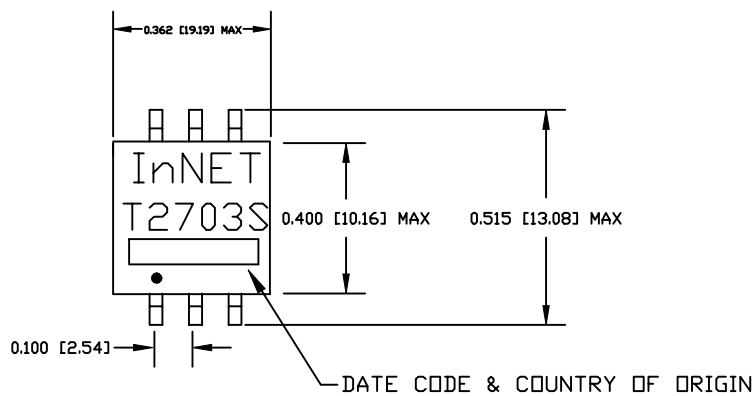

NOTES:

- 1.0 LEADS MEET THE SOLDERABILITY REQUIREMENTS TO MIL-STD-202 METHOD 208.
- 2.0 COPLANARITY OF PINS IS .004 [0.102] MAX.
- 3.0 THE CASE IS UL 94 V-0 BLACK PLASTIC.