


EAO – Your Expert Partner for Human Machine Interfaces

56-130.22.200.22.02 - Single side pushbutton

56-130.22.200.22.02 - Single side pushbutton



Attention: The preview is based on a sample product. This can differ from your current configuration.

Mounting

| | |
|------------------|---------------------|
| Mounting type | Panel rear mounting |
| Mounting cut-out | Ø 43 mm |
| Design | raised |

Front

| | |
|-----------------|---------|
| Front dimension | Ø 43 mm |
| Front shape | round |

Other Attributes

| | |
|-------------------|------------------|
| Weight | 0,1 kg |
| Colour | non-illuminative |
| Operating voltage | 24 V DC |

Operating-/Indication part

| | |
|---------------|-----------|
| Lens optics | opaque |
| Lens material | Aluminium |
| Lens colour | yellow |
| Lens profile | raised |

IP-Rating

| | |
|------------------|------|
| Front protection | IP67 |
|------------------|------|

Connection Method

| | |
|----------|----------------------|
| Terminal | Cable with connector |
|----------|----------------------|

Actuator

| | |
|------------------|-----------|
| Switching action | Momentary |
|------------------|-----------|

Switching element

| | |
|-------------------|-------------------------------|
| Contact material | |
| Switching current | 0.2 A |
| Switching system | Snap-action switching element |
| Switching voltage | 137 V AC/DC |
| Contacts | 1 NO |

Illumination

| | |
|---------|-------------------|
| Display | LED 8 red 2 green |
|---------|-------------------|


Function

| | |
|------------------------|--|
| Illuminated pushbutton | |
|------------------------|--|


EAO – Your Expert Partner for Human Machine Interfaces

56-130.22.200.22.02 - Single side pushbutton


Dimensions




Mounting cut-outs




Wiring diagram

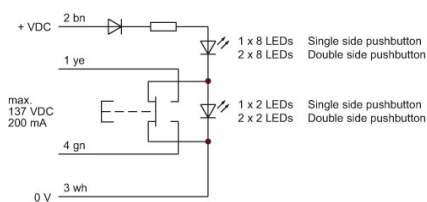

Component layout



Standard type



Legend

Contacts: NO = Normally open

Switching action: A = Rest, B = Momentary