


THREE PHASE BRIDGE

Power Module

Features

- Package fully compatible with the industry standard INT-A-pak power modules series
- High thermal conductivity package, electrically insulated case
- Low power loss
- Excellent power volume ratio, outline for easy connections to power transistor and IGBT modules
- 4000 V_{RMS} isolating voltage
- UL E78996 approved 

200 A

Description

It extends the existing range of MT...KB bridges an extremely compact, encapsulated three phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and heavy duty applications.

Major Ratings and Characteristics

Parameters	200MT40KB	Units
I _O	200	A
@ T _C	85	°C
I _{FSM} @ 50Hz	1800	A
@ 60Hz	1880	
I ² t @ 50Hz	16.2	KA ² s
@ 60Hz	14.7	
I ² √t	162	KA ² √s
V _{RRM}	400	V
T _{STG} range	-40 to 150	°C
T _J range	-40 to 150	



200MT40KB

Bulletin I27129 rev. C 05/03

International
IR Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak reverse voltage V	I_{RRM} max. @ $T_J = 150^\circ\text{C}$ mA
200MT40KB	400	500	6

Forward Conduction

Parameter	200MT40KB	Units	Conditions
I_O Maximum RMS output current @ Case temperature	200	A	120° Rect conduction angle
	85	°C	
I_{TSM} Maximum peak, one-cycle forward, non-repetitive on state surge current	1800	A	t = 10ms No voltage
	1880		t = 8.3ms reapplied
	1520		t = 10ms 100% V_{RRM}
	1590		t = 8.3ms reapplied
I^2t Maximum I^2t for fusing	16.2	KA ² s	t = 10ms No voltage
	14.7		t = 8.3ms reapplied
	11.6		t = 10ms 100% V_{RRM}
	12.6		t = 8.3ms reapplied
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	162	KA ² √s	t = 0.1 to 10ms, no voltage reapplied
$V_{F(TO)}$ Value of threshold voltage	0.76	V	@ T_J max.
r_f Slope resistance	2.4	mΩ	
V_{FM} Maximum forward voltage drop	1.40	V	$I_{pk} = 200\text{A}$, $T_J = 25^\circ\text{C}$, $t_p = 400\mu\text{s}$ single junction
V_{INS} Insulation voltage	4000	V	$T_J = 25^\circ\text{C}$ all terminal shorted, f = 50Hz, t = 1s

Thermal and Mechanical Specifications

Parameter	200MT40KB	Units	Conditions
T_J Maximum junction operating temperature range	- 40 to 150	°C	
T_{stg} Maximum storage temperature range	-40 to 150	°C	
R_{thJC} Maximum thermal resistance, junction to case	0.12	K/W	DC operation per module
	0.69		DC operation per junction
	0.14		120° Rect conduction angle per module
	0.82		120° Rect conduction angle per junction
R_{thCS} Maximum thermal resistance, case to heatsink	0.033	K/W	Per module. Mounting surface smooth, flat and greased. Heatsink compound thermal conductivity = 0.42W/mK
T Mounting torque ± 10% to heatsink	4 to 6	Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound.
wt Approximate weight	176	g	Lubricated threads.

Ordering Information Table

Device Code					
20	0	MT	40	K	B
1	2	3	4	5	

- 1** - Current rating code: 20 = 200 A (Avg)
- 2** - Three phase diodes bridge
- 3** - Essential part number
- 4** - Voltage code: Code x 10 = V_{RRM} (40 = 400V)
- 5** - Generation II

Outline Table (without optional barriers)

Screws M5 x 0.8 Length 10

All dimensions in millimeters (inches)

NOTE: To order the Optional Hardware see Bulletin I27900

200MT40KB

Bulletin I27129 rev. C 05/03

Outline Table (with optional barriers)

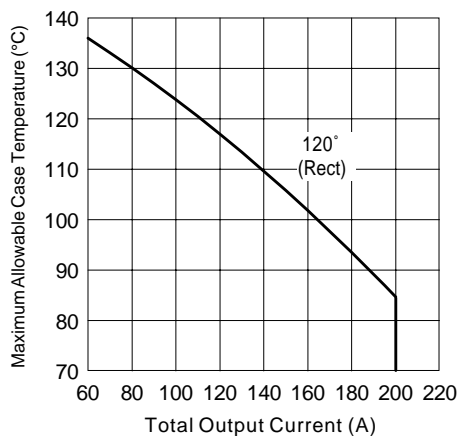
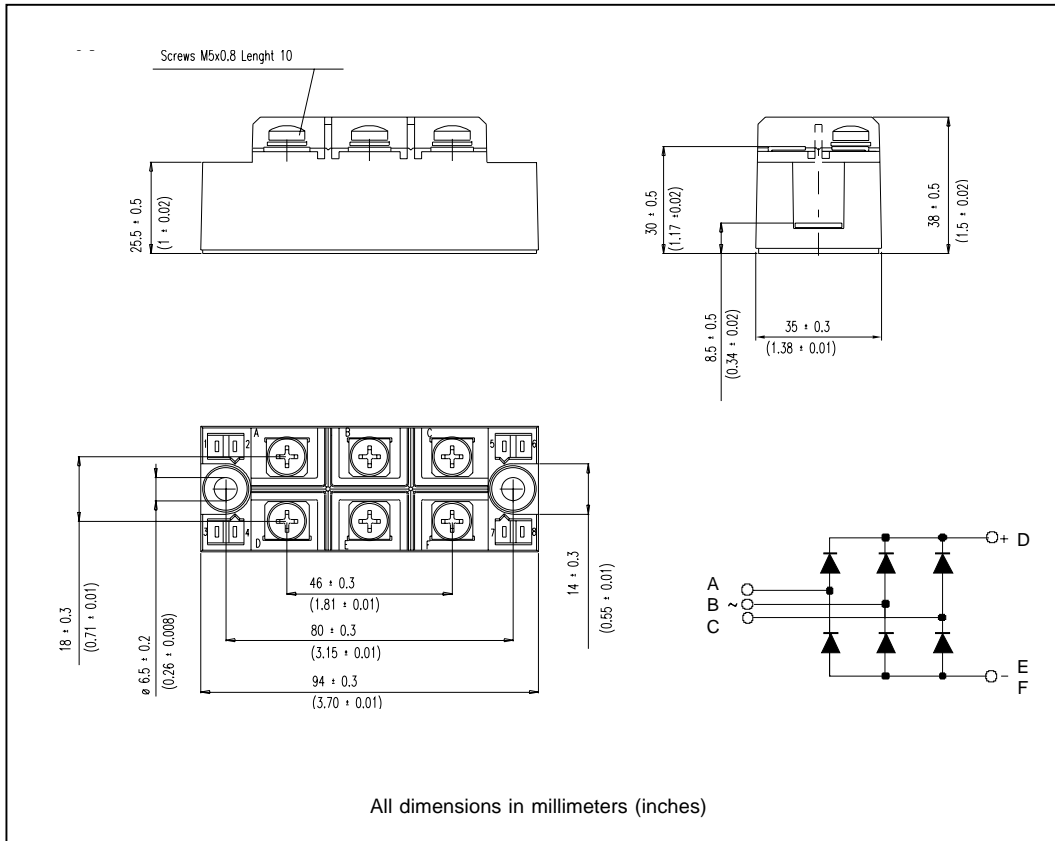


Fig. 1 - Current Rating Characteristics

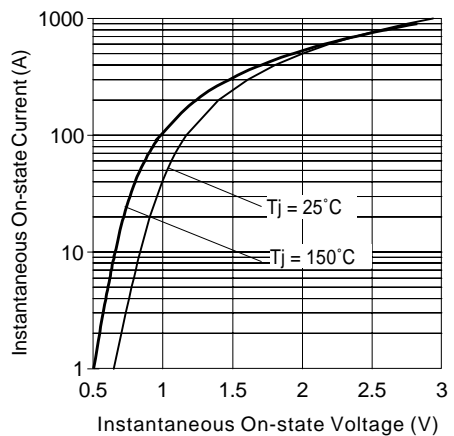


Fig. 2 - On-state Voltage Drop Characteristics

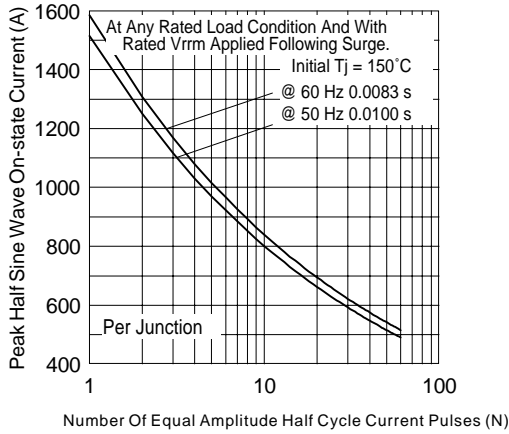


Fig. 3 - Maximum Non-Repetitive Surge Current

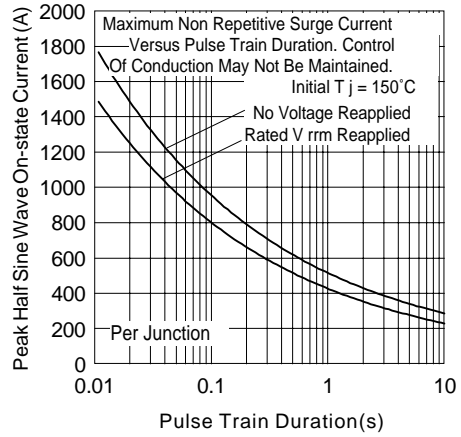


Fig. 4 - Maximum Non-Repetitive Surge Current

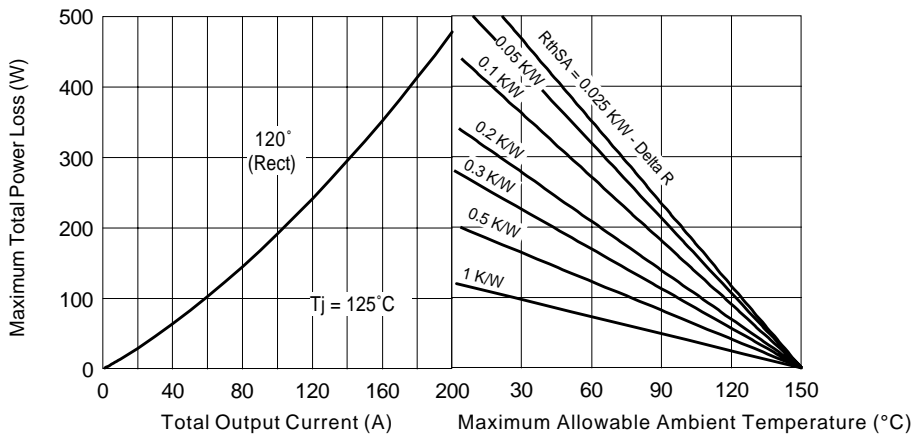


Fig. 5 - Current Rating Nomogram (1 Module Per Heatsink)

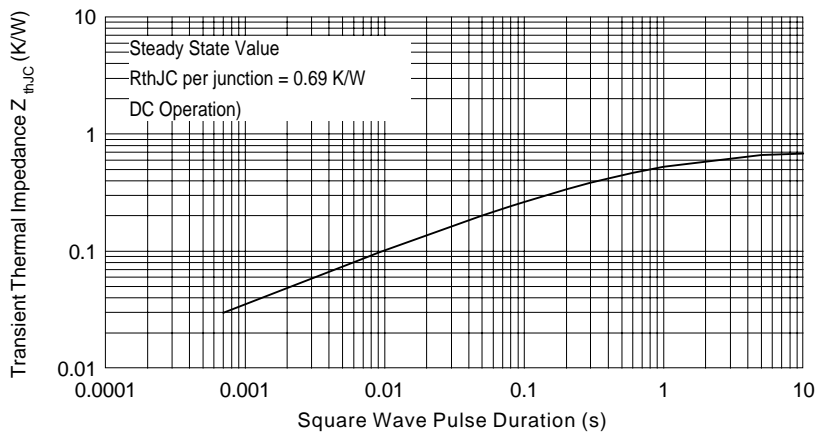


Fig. 6 - Thermal Impedance Z_{thJC} Characteristics

200MT40KB

Bulletin I27129 rev. C 05/03

International
IR Rectifier

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
05/03



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.