

# Adjustable Coils PIN Type K Series


Coils, Transformers

## K5-C




### Specifications

- (1) 1~1000 $\mu$ H
- (2) 0.1~20MHz
- (3) F: $\pm$ 2%  
L: $\pm$ 5%
- (4) 10~10000pF
- (5) 50~100

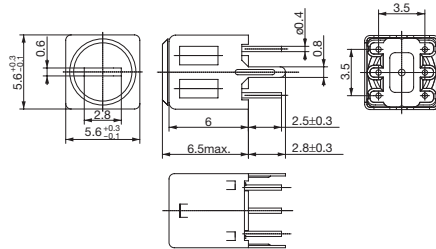


## K7-P

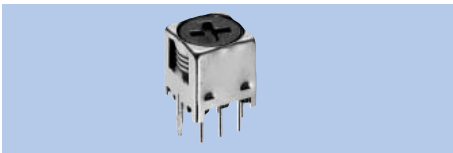

### Specifications

- (1) 1~1600 $\mu$ H
- (2) 0.1~20MHz
- (3) F: $\pm$ 2%  
L: $\pm$ 5%
- (4) -
- (5) -

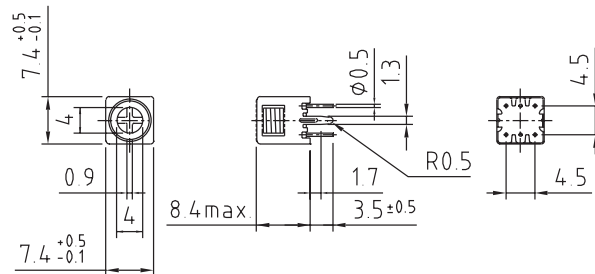


## K7-D



### Specifications

- (1) 5~100mH
- (2) 10~300kHz
- (3) F: $\pm$ 2%  
L: $\pm$ 5%
- (4) -
- (5) 50~80

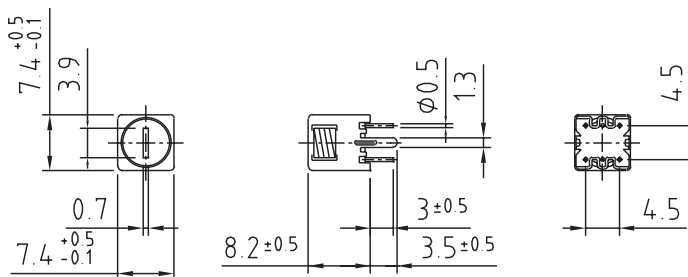


## K7-T




### Specifications

- (1) 1~850 $\mu$ H
- (2) 0.1~20MHz
- (3) F: $\pm$ 2%  
L: $\pm$ 5%
- (4) -
- (5) -

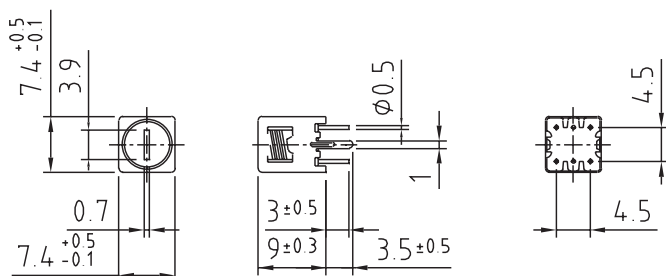


- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q

### K7-T1

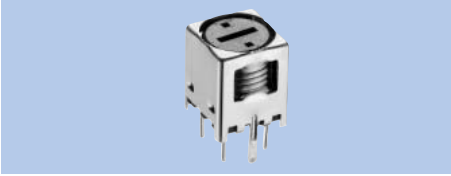


**Specifications**

- (1) 0.1~6mH
- (2) 10~300kHz
- (3) F:±2%  
L:±5%
- (4) -
- (5) 40~70

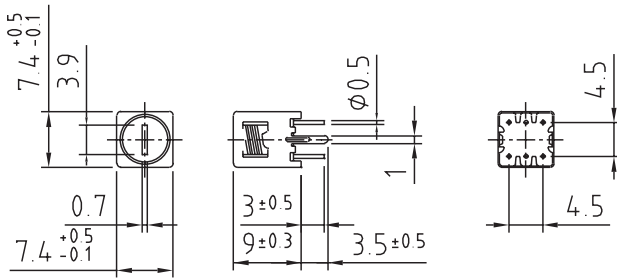


### K7-T3

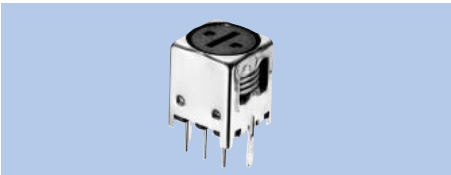

**Specifications**

- (1) 1~40mH
- (2) 0.1~1MHz
- (3) F:±2%  
L:±5%
- (4) -
- (5) 50~140

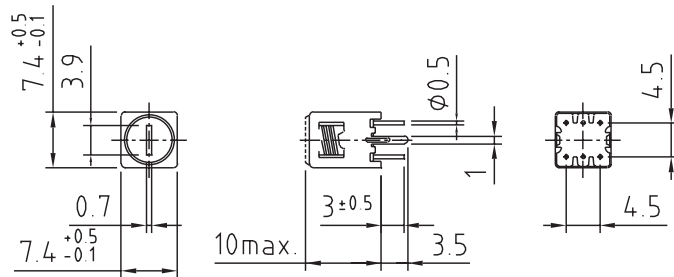


### K7-H5




**Specifications**

- (1) 1~1000μH
- (2) 0.1~20MHz
- (3) F:±3%  
L:±6%
- (4) -
- (5) 50~140

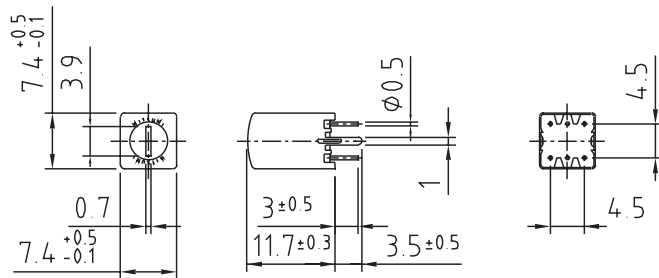


### K7-J

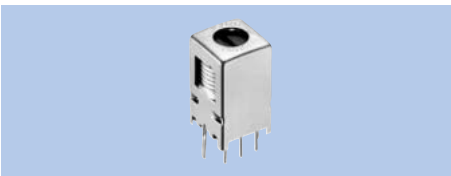


**Specifications**

- (1) 1~40mH
- (2) 10~300kHz
- (3) L:±6%
- (4) -
- (5) 40~70

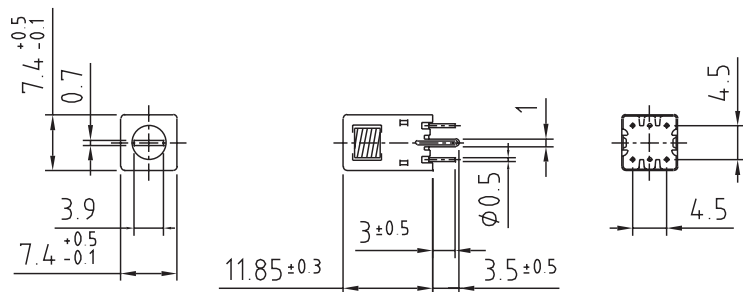


- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q

K7-J5

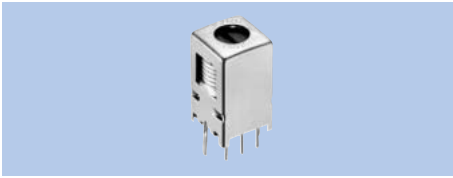

Specifications

- (1) 1~40mH
- (2) 10~300kHz
- (3) F:±3%  
L:±6%
- (4) -
- (5) 40~70

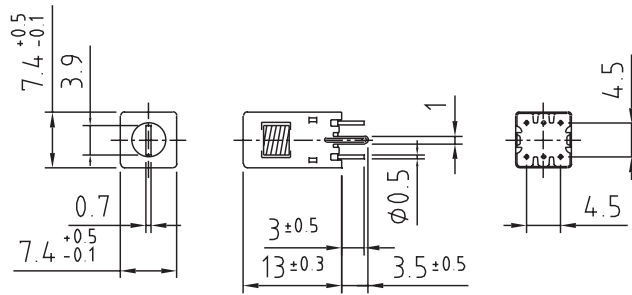

- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q