

THIS DRAWING IS THE PROPERTY OF KONTEK COMATEL S.p.a. AND IT CAN NOT BE USED, REPRODUCED AND OR LOANED TO THIRD PARTIES WITHOUT THE WRITTEN PERMISSION OF KONTEK COMATEL S.p.a.


**TECHNICAL DATA**

**Electrical**

Current Rating: 0.5A maxi  
 Withstanding voltage: 100V AC for one minute  
 Insulation resistance: 100MΩmini  
 Contact resistance: 30mΩ max

**Mechanical**

Temperature rating: -20° to +85°C

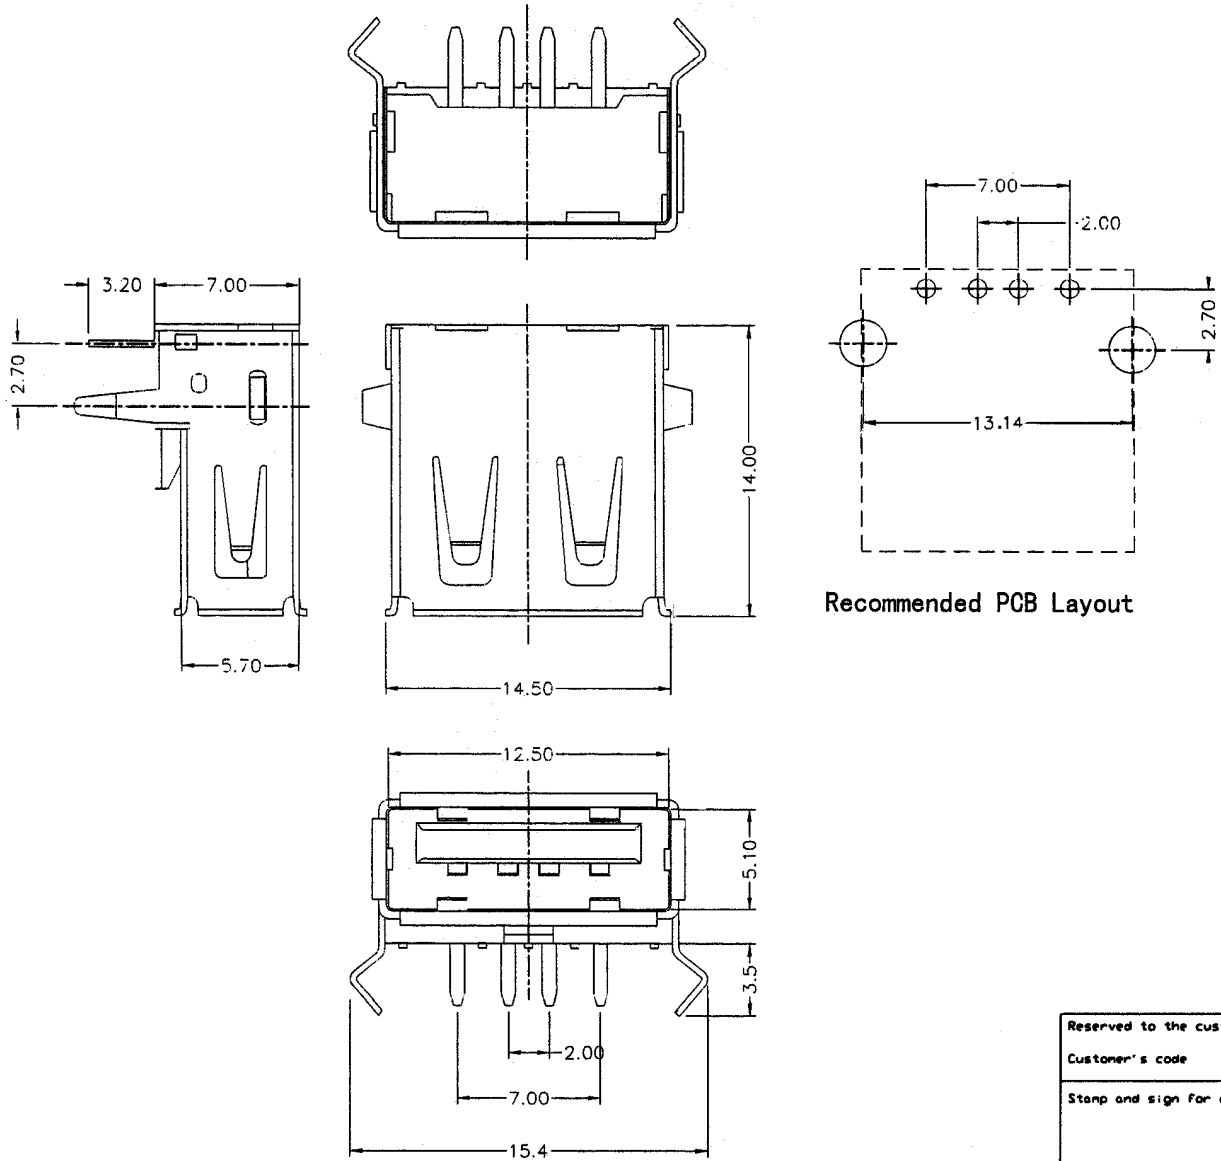

**Recommended PCB Layout**

Reserved to the customer
Customer's code
Stamp and sign for approval
DATE:

Kontek - Comatel											Note			
Insulator code											KSC:TEMPORARY CODE, TEMPORARY DRAWING, INDICATIVE QUOTE, SUBJECTION TO MODIFICATION		UNIT:mm	
Pin code											Material Insulator: PBT Contact: Brass			
TOLERANCES FOR FREE DIMENSIONS											Platings Gold Flash		date 27-11-07	
VALORI ANGOLARI	0A 0.5	> 3	> 6	> 10	> 16	> 30	> 50	> 80	>120	>180	>250	Protection		Design Gambino L.
± 30'	±0.125	±0.150	±0.180	±0.215	±0.260	±0.310	±0.370	±0.435	±0.500	±0.575	±0.650			



Denomination \_\_\_\_\_  
 USB 4P A type female, solder type

Cod. **KSC4654**

File: KSC4654

Index

Dis. Nr. \_\_\_\_\_

QUESTO DISEGNO E' DI PROPRIETA' DELLA KONTEK COMATEL S.p.a. E NON PUO' ESSERE USATO, E/O CEDUTO A TERZI SENZA IL PERMESSO SCRITTO DELLA KONTEK COMATEL S.p.a.