


TYPE YTS-A

Full Tension Splice for Stranded Aluminum Cable

Full tension splice for SAC transmission lines. Made of aluminum tube with staked-in cable stop. Pre-filled with PENETROX™ joint compound and capped.

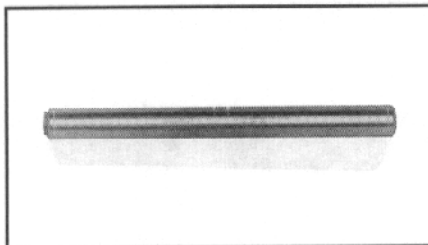

CATALOG NUMBER *	CONDUCTOR			L	TOOLS, DIE SETS			
	ALUMINUM				DIE INDEX	Y45**	Y46**	Y60BHU**
	CODE	MCM.	STR.					
YTS331A	—	450	37	9-1/4	719	S719	P719	L719
	COSMOS	477	19					
	SYRINGA	477	37					
YTS39A	VIOLET	715.5	37	13-3/8	724	S724	P724	L724
	NASTURTIUM	715.5	61					
	CATTAIL	750	61					
YTS391A	ARBUTUS	795	37	15-3/4				
	LILAC	795	61					
	—	800	61					
YTS431A	—	874.5	37	16-1/2	725	S725	P725	L725
	CROCUS	874.5	61					
	MAGNOLIA	954	37					
	GOLDENROD	954	61					
YTS463A	COREOPSIS	1590	61	21-1/2	728	—	—	L728

* For Extra High Voltage (EHV) applications add suffix "T" to catalog number (e.g., YTS391AT).

** Overlap crimps.


E-58

TYPES YDS-W & YDS

HYSPLICE™

Full Tension Sleeve for Solid Copper Conductors

YDS-W is designed to develop full rated breaking strength of hard drawn and medium hard drawn solid copper conductor. Made of pure copper tubing. Installed with standard tooling.

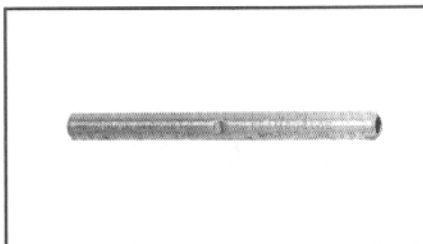

CATALOG NUMBER	SOLID CONDUCTOR	L	DIE INDEX	TOOLS, DIE SET CATALOG NO., & (CRIMPS PER END)			
				MD7, MD6	Y35, Y750, Y45†, Y46‡	Y48B	Y60BHU
YDS8WG1	8	1-7/8	161	W161 (1)	U161 (1)	—	—
YDS8W	8	1-1/2	171	W171 (1)	U171 (1)*	—	—
YDS6W	6	2-5/8	161	W161 (2)	U161 (1)*	—	—
YDS4W	4	2-5/8	162	W162 (4)	U162 (1)*	—	—
YDS3W	3	2-7/8	163	W163 (4)	U163 (1)*	—	—
			or 308	—	U308 (2)*		
YDS2W	2	4	163	W163 (6)	U163 (2)*	—	—
YDS1W	1	5-7/8	164	W164 (8)	U164 (4)*	—	—
YDS75	1/0	6-1/4	165	W165 (6)	U165/U205 (6)	—	—
YDS76	2/0	6-5/8	166	W166 (12)	U166/U459 (6)	—	—
YDS78	4/0	7-7/8	168	—	U168 (9)	C168 (3)	L168 (3)

* Multiple crimp die set; makes more than one crimp per tool compression. Figure indicates number of compressions.

† U Die with adapter PT-6515.

‡ U Die with adapter PUADP-1.

RUS Accepted