

2012 Size

3.7GHz Band


Chip Multilayer RF Transformer

(Impedance ratio 50:100)

Balun for LO

SLT-S370KB

Shape & Size

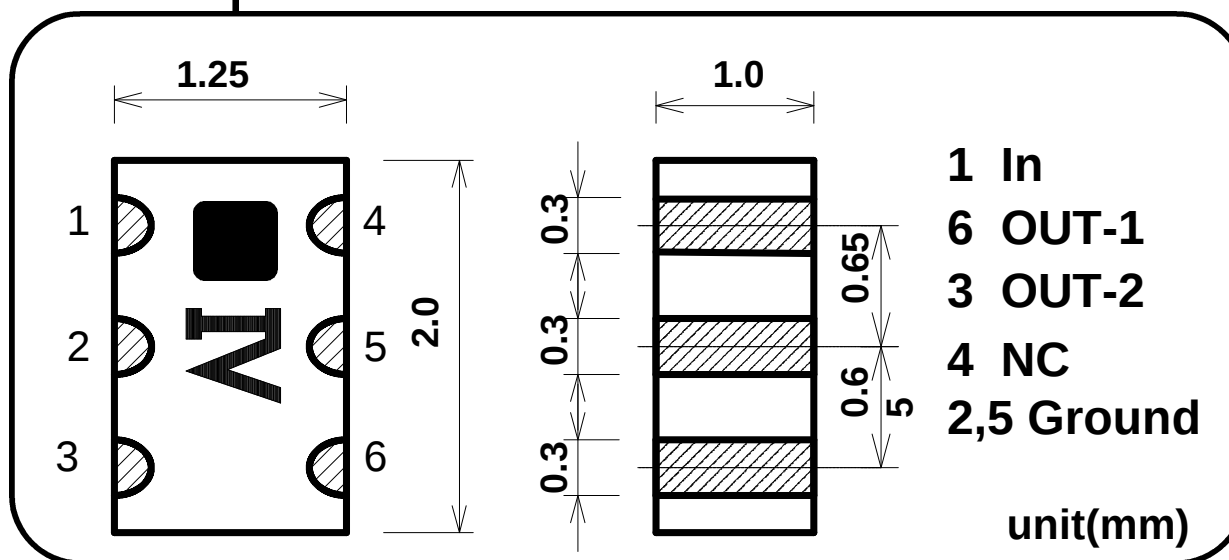

Specifications


P/N	Frequency Range(GHz)	Impedance	Insertion Loss*1	Amplitude Balance	Phase Balance	Handling Power	Temperature Range
SLT-S370KB	3.4-4.01	50:100	1.0dB Max.	1.5dB Max.	180 +/-20deg.	100mW Max.	-35 to +85 deg.C

*1:Back to Back(/piece)


"All the technical data and information contained herein are subject to change without notice."

SLT-S370KB Sample Data

Phase Balance Amp. Balance

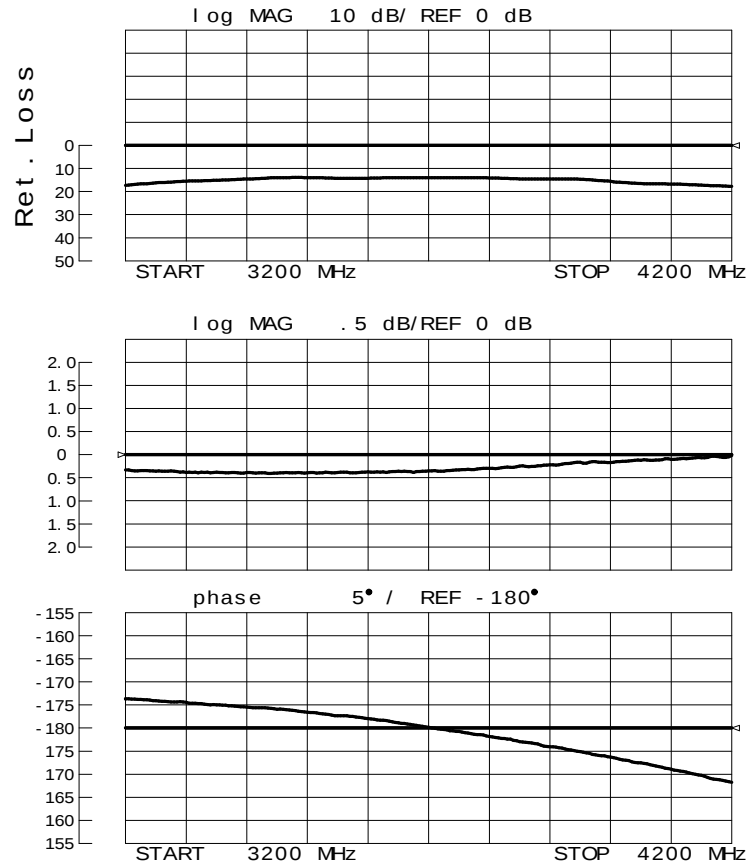


Ins. Loss
OUT-1

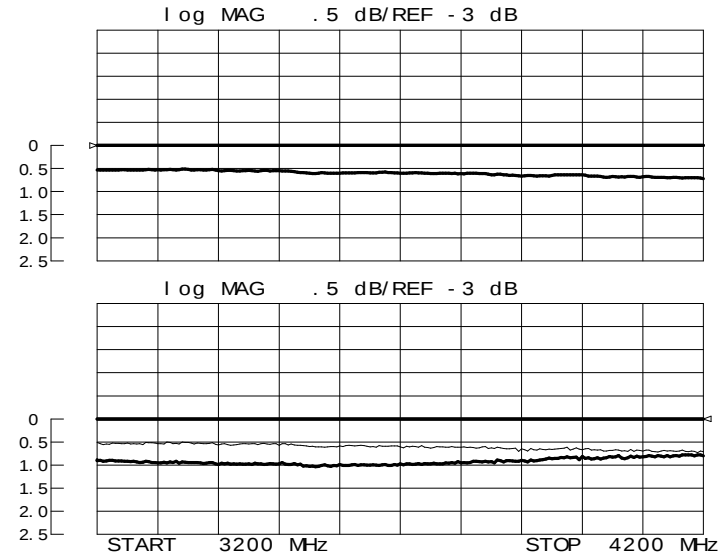


Insertion Loss(Out 1, Out 2):
measurement-splitting loss-resistor loss

Ins. Loss
Back to Back
(/pair)

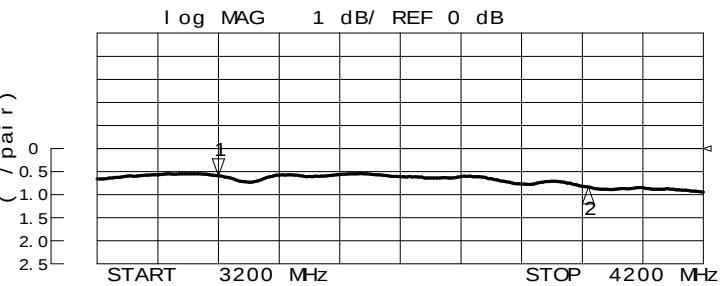

Foot Pattern

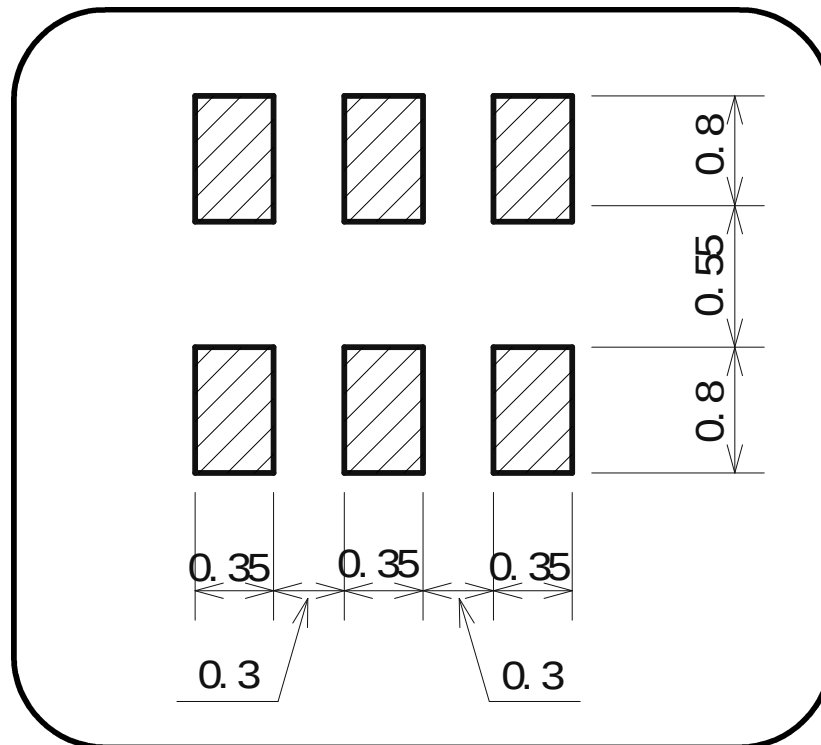

Foot Pattern Example

