




Leaded Oscillator, TTL / HC-MOS
Metal Package, Full Size DIP and Half DIP

HCOF / HCOH Series


Frequency	10 KHz to 160.000 MHz	
Output Level	TTL	HC-MOS
Level	'0' = 0.4 VDC Max., '1' = 2.4 VDC Min.	'0' = 0.1 Vcc Max., '1' = 0.9 Vcc Min.
Duty Cycle	Specify 50% ± 10% or ± 5% See Table	
Rise / Fall Time	5 nS Max. @ Vcc = +3.3 VDC, 10 nS Max. @ Vcc = +5.0 VDC **	
Output Load	Fo < 50 MHz = 10 TTL, Fo > 50 MHz = 5 LSTTL	See Table
Frequency Stability	See Frequency Stability Table (Includes room temperature tolerance and stability over operating temperature)	
Start-up Time	10 mS Max.	
Enable / Disable Time	100 nS Max.	
Supply Voltage	See Input Voltage Table, tolerance ± 5 %	
Current	40 mA Max. @ 3.3 VDC, 85 mA Max. @ 5.0 VDC **	
Temperature		
Operating	See Operating Temperature Table	
Storage	-55° C to +125° C	
Environmental	See Appendix B for information	
Package Information	MSL = N.A., Termination = e1	

Programmable version is available for quick delivery, part numbers HCPF and HCPH.

HCOF Package

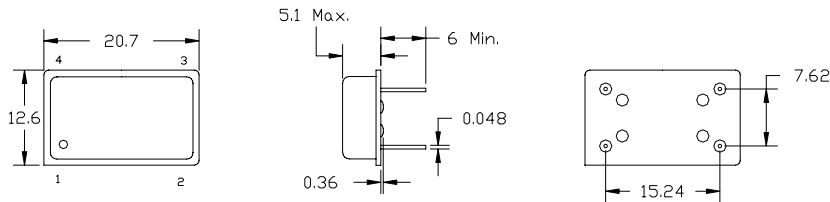

HCOH Package

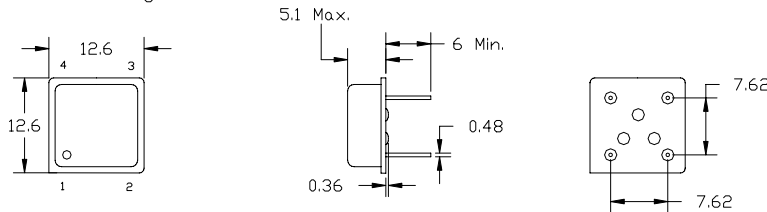

- Pin Connection
- 1 Enable / N.C.
 - 2 GND
 - 3 Output
 - 4 Vcc

Dimension Units: mm

Tri-State Function	
Pin 1 Open	Enable
Pin 1 ≥ 70% Vdd	Enable
Pin 1 ≤ 30% Vdd	Disable

Part Number Guide		Sample Part Number: HCOF - 3153BH - 20.000					
Package	Input Voltage	Operating Temperature	Symmetry (Duty Cycle)	Output	Stability (in ppm)	Enable / Disable	Frequency
HCOF - HCOH -	5 = 5.0 V	7 = 0° C to +50° C	5 = 45 / 55 Max.	1 = 10TTL / 15 pF HC-MOS	*E = ±10	H = Enable	- 20.000 MHz
	3 = 3.3 V	1 = 0° C to +70° C	6 = 40 / 60 Max.	3 = 15 pF HC-MOS	*D = ±15		
	7 = 3.0 V	6 = -10° C to +70° C		6 = 30 pF	F = ±20		
	2 = 2.7 V	3 = -20° C to +70° C		5 = 50 pF HC-MOS (<40 MHz)	A = ±25		
	6 = 2.5 V	4 = -30° C to +75° C		4 = AC-MOS	B = ±50		
		2 = -40° C to +85° C			C = ±100		

NOTE: A 0.01 µF bypass capacitor is recommended between Vcc (pin 4) and Gnd (pin 2) to minimize power supply noise.

* Not available for all temperature ranges. ** Frequency, supply, and load related parameters.