

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

30W L-BAND POWER GaAs FET

N-CHANNEL GaAs MES FET

DESCRIPTION

The NES1821B-30 is power GaAs FET which provides high output power and high gain in the 1.8-2.1 GHz band.

Internal input matching circuits are designed to optimize performance. The device has a $0.8\ \mu\text{m}$ gate length for increased linear gain. To reduce thermal resistance, the device uses PHS (Plated Heat Sink) technology.

The device incorporates WSi (tungsten silicide) gate for high reliability and SiO_2 glassivation for surface stability.

FEATURES

- High output power
- High gain
- High power added efficiency
- Internally matched input
- High reliability


ABSOLUTE MAXIMUM RATINGS ($T_A = 25\ ^\circ\text{C}$)

Drain to Source Voltage	V_{DS}	15	V
Gate to Source Voltage	V_{GS}	-7	V
Gate to Drain Voltage	V_{GD}	-18	V
Drain Current	I_D	27	A
Gate Current	I_G	180	mA
Total Power Dissipation	$P_T^{(*)}$	110	W
Channel Temperature	T_{ch}	175	$^\circ\text{C}$
Storage Temperature	T_{stg}	-65 to +175	$^\circ\text{C}$

* $T_C = 25\ ^\circ\text{C}$

Caution Please handle this device at static-free workstation, because this is an electrostatic sensitive device.

PACKAGE DIMENSIONS (UNIT: mm)

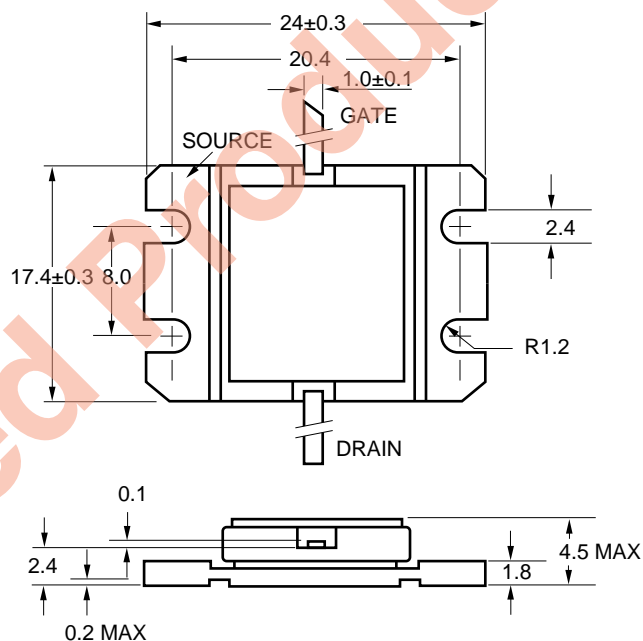

ELECTRICAL CHARACTERISTICS (T_A = 25 °C)

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Saturated Drain Current	I _{DSS}	--	18.0	--	A	V _{DS} = 2.5 V, V _{GS} = 0 V
Pinch-off Voltage	V _P	-4.0	-2.6	--	V	V _{DS} = 2.5 V, I _D = 80 mA
Thermal Resistance	R _{th}	--	1.4	1.7	°C/W	Channel to Case
Output Power	P _O *1	44.5	45.0	--	dBm	freq. = 1.96 GHz
Linear Gain	GL	11.0	13.0	--	dB	V _{DS} = 10 V I _D = 1.0 A set
Drain Current	I _D *2	--	2.5	--	A	R _g = 30 Ω *3

*1 PIN = 35.5 dBm

*2 P_O = 37 dBm

RECOMMENDING OPERATING LIMITS

R _g *3 (Ω)	V _{DS} (V)	T _{ch} (°C)	G.C.P *4
30	to 10	to 125	to 3 dB comp

Note


*3 R_g is the series resistance between the gate supply and the FET gate.

*4 G.C.P: Gain Compression Point

Discontinued Product

TYPICAL RF PERFORMANCE

f = 1.96 GHz, Vd = 10 V, Id = 1 A set, Rg = 30 Ω

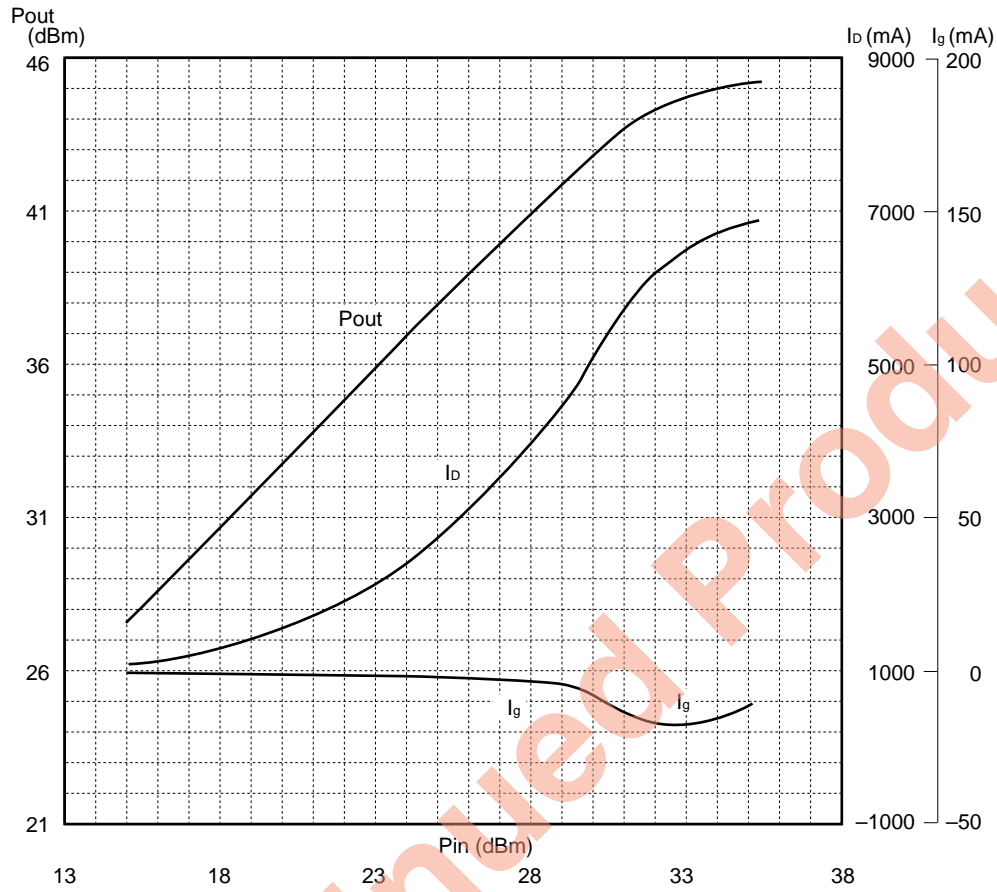

Discontinued Product

S-PARAMETER

V_{DS} = 10 V, I_{DS} = 1 A set

FREQUENCY MHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
1 600.000	0.793	114.8	1.210	-18.4	0.027	-92.7	0.903	144.0
1 610.000	0.786	113.9	1.235	-20.1	0.028	-94.2	0.904	143.5
1 620.000	0.779	113.0	1.256	-21.2	0.029	-95.7	0.908	143
1 630.000	0.774	112.2	1.286	-21.8	0.030	-97.7	0.909	142.5
1 640.000	0.766	111.3	1.337	-22.3	0.032	-100.4	0.912	141.8
1 650.000	0.758	110.4	1.412	-23	0.033	-103.3	0.914	141.3
1 660.000	0.752	109.4	1.511	-24.7	0.034	-106.6	0.919	140.7
1 670.000	0.744	108.5	1.616	-27.7	0.035	-109.7	0.920	140.0
1 680.000	0.736	107.4	1.711	-32.0	0.036	-112.6	0.924	139.3
1 690.000	0.728	106.4	1.768	-36.8	0.036	-114.6	0.927	138.5
1 700.000	0.720	105.3	1.791	-41.4	0.036	-116.1	0.929	137.6
1 710.000	0.710	104.2	1.783	-45.5	0.037	-116.8	0.931	136.9
1 720.000	0.698	103.0	1.758	-48.3	0.039	-117.4	0.934	136.0
1 730.000	0.688	101.9	1.748	-49.8	0.041	-118.1	0.936	134.9
1 740.000	0.675	100.6	1.763	-50.2	0.045	-119.6	0.938	133.8
1 750.000	0.662	99.3	1.822	-49.9	0.049	-122.5	0.940	132.7
1 760.000	0.646	98.0	1.947	-50.1	0.052	-126.5	0.940	131.4
1 770.000	0.631	96.5	2.136	-51.7	0.055	-131.1	0.939	130.2
1 780.000	0.614	94.9	2.350	-55.6	0.057	-136.0	0.937	128.6
1 790.000	0.593	93.3	2.547	-61.2	0.059	-140.2	0.934	127.0
1 800.000	0.571	91.6	2.682	-67.6	0.060	-143.8	0.929	125.2
1 810.000	0.546	89.8	2.742	-73.9	0.062	-146.4	0.923	123.4
1 820.000	0.519	87.9	2.749	-79.0	0.065	-148.6	0.916	121.3
1 830.000	0.488	85.9	2.748	-83.0	0.068	-151.0	0.907	119.1
1 840.000	0.453	83.9	2.771	-86.0	0.073	-154.1	0.891	116.5
1 850.000	0.411	81.9	2.846	-88.3	0.080	-158.1	0.870	113.6
1 860.000	0.362	80.3	3.006	-90.9	0.086	-163.4	0.845	110.5
1 870.000	0.307	79.5	3.249	-94.8	0.093	-169.5	0.814	107.1
1 880.000	0.243	80.9	3.544	-100.6	0.098	-175.9	0.774	103.2
1 890.000	0.176	88.9	3.819	-108.4	0.104	177.3	0.721	99.1
1 900.000	0.124	113.0	4.028	-117.1	0.109	170.1	0.651	94.9
1 910.000	0.134	152.3	4.143	-125.9	0.113	162.4	0.569	90.6
1 920.000	0.208	172.6	4.189	-134.3	0.117	154.1	0.470	87.5
1 930.000	0.307	177.0	4.201	-142.6	0.118	145.0	0.360	86.5
1 940.000	0.410	175.3	4.179	-151.0	0.117	135.9	0.253	91.9
1 950.000	0.511	170.6	4.110	-159.7	0.115	127.2	0.174	112.1
1 960.000	0.602	164.9	3.967	-168.2	0.111	118.9	0.168	147.0
1 970.000	0.678	158.9	3.762	-176.3	0.107	111.1	0.230	168.2
1 980.000	0.739	152.9	3.531	176.3	0.101	103.6	0.312	175.3
1 990.000	0.787	147.3	3.299	169.6	0.094	96.5	0.391	176.5
2 000.000	0.822	142.2	3.081	163.3	0.088	90.5	0.462	175.3
2 010.000	0.848	137.5	2.850	157.0	0.081	85.3	0.524	173.4
2 020.000	0.865	133.2	2.607	151.2	0.076	81.0	0.576	171.2
2 030.000	0.880	129.2	2.363	146.2	0.071	77.2	0.623	168.9
2 040.000	0.887	125.7	2.129	142.6	0.068	73.5	0.661	166.6
2 050.000	0.892	122.5	1.927	140.2	0.065	69.3	0.695	164.6
2 060.000	0.895	119.4	1.772	138.9	0.062	64.3	0.724	162.6
2 070.000	0.898	116.5	1.670	138.0	0.059	58.7	0.747	160.7
2 080.000	0.897	113.8	1.613	136.6	0.054	53.5	0.768	158.7
2 090.000	0.896	111.1	1.583	134.1	0.050	49.2	0.788	157.1
2 100.000	0.894	108.7	1.546	130.3	0.045	45.9	0.804	155.5
2 110.000	0.891	106.3	1.485	125.4	0.041	44.6	0.819	154.0
2 120.000	0.887	103.9	1.386	120.2	0.038	43.6	0.831	152.7
2 130.000	0.884	101.7	1.265	116.0	0.036	43.7	0.842	151.3
2 140.000	0.879	99.5	1.141	113.2	0.035	43.5	0.851	150
2 150.000	0.875	97.2	1.031	112.1	0.035	42.4	0.860	148.7
2 160.000	0.871	95.1	0.949	112.6	0.035	39.7	0.871	147.5
2 170.000	0.865	93.0	0.897	114	0.034	35.5	0.879	146.4
2 180.000	0.861	90.9	0.880	115.0	0.033	30.5	0.885	145.4
2 190.000	0.856	88.6	0.888	114.7	0.030	26.0	0.892	144.2

[MEMO]

Discontinued Product

[MEMO]

Discontinued Product

[MEMO]

Discontinued Product

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.