


IDGV1G-05A1F1C-[40X/50X/55X]

1Gbit x32/x16 GDDR5 SGRAM

EU RoHS compliant

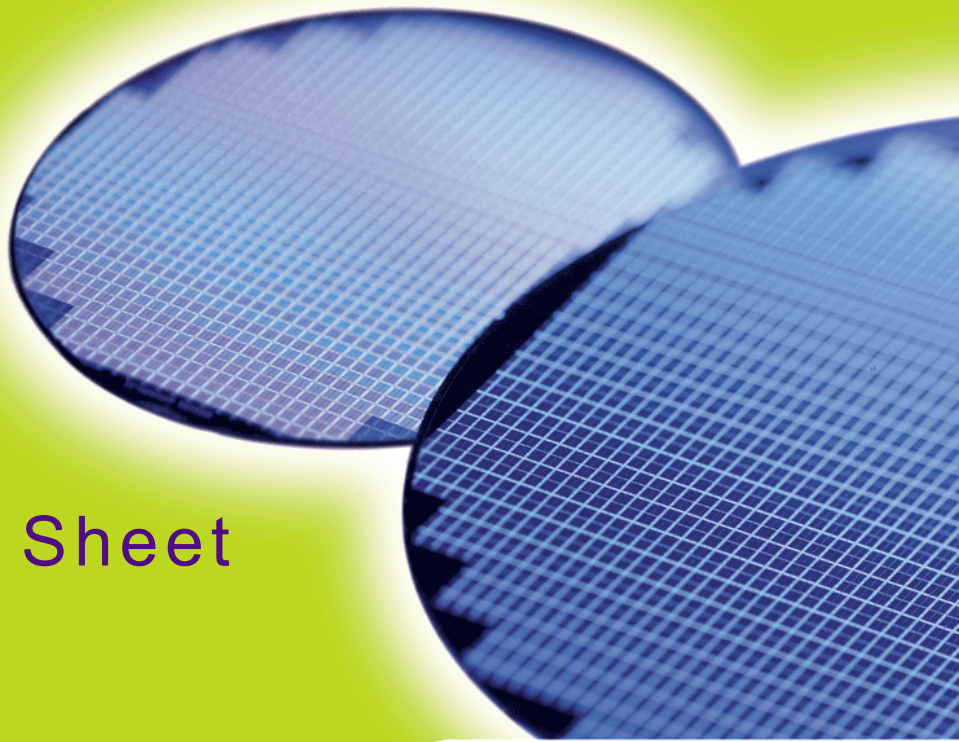

Internet Data Sheet

Rev. 1.10

IDGV1G-05A1F1C
1GBit GDDR5 Graphics RAM

| | |
|--|--|
| IDGV1G-05A1F1C-[40X/50X/55X] | |
| Revision History:2008-12, Rev. 1.10 | |
| Page | Subjects (major changes since last revision) |
| All | Speed bin -55X added, speed bin -45X removed |
| Previous Revision: Rev. 1.01, 2008-10 | |
| All | Typos corrected |
| Previous Revision: Rev. 1.00, 2008-09 | |
| 5 | Figure1 - Maximum data rate for RDQS mode increased to 3.0 Gbps; PLL-off mode restricted to 4.0 Gbps |
| Previous Revision: Rev. 0.60, 2008-06 | |
| All | 36X speed bin removed |
| Previous Revision: Rev. 0.50, 2008-05 | |
| All | Adapted Internet version |

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?

Your feedback will help us to continuously improve the quality of this document.

Please send your proposal (including a reference to this document) to:

techdoc@qimonda.com



1 Overview

1.1 Features

- Monolithic 1Gbit GDDR5 SGRAM (2Mbit x 32 I/O x 16 banks and 4Mbit x 16 I/O x 16 banks)
- x32/x16 mode configuration set at power-up with EDC pin
- Quarter data-rate differential clock inputs $\overline{\text{CK}}/\overline{\text{CK}}$ for address and commands
- Two half data-rate differential clock inputs $\overline{\text{WCK}}/\overline{\text{WCK}}$, each associated with two data bytes (DQ, $\overline{\text{DBI}}$, EDC)
- Single ended interface for data, address and command
- Double Data Rate (DDR) data ($\overline{\text{WCK}}$)
- Single Data Rate (SDR) command ($\overline{\text{CK}}$)
- Double Data Rate (DDR) addressing ($\overline{\text{CK}}$)
- Write data mask function (single/double byte mask) via address bus
- 16 internal banks
- 4 bank groups for $t_{\text{CCD}} = 3 t_{\text{CK}}$
- 8n prefetch architecture: 256 bit per array Read or Write access
- Burst Length: 8 only
- Data bus inversion (DBI) and address bus inversion (ABI)
- Input/output PLL on/off mode
- Address training: address input monitoring via DQ pins
- $\overline{\text{WCK}}/2\overline{\text{CK}}$ clock training: phase information via EDC pins
- Data read and write training via Read FIFO (FIFO depth = 6)
- Read FIFO pattern preload by LDFF command
- Direct write data load to Read FIFO by WRTR command
- Consecutive read of Read FIFO by RDTR command
- Programmable EDC hold pattern for CDR
- Data Preamble for Read
- Read/Write data transmission integrity secured by cyclic redundancy check (CRC-8)
- Auto Precharge option for each burst access
- Programmable CAS latency: 6 to 20 t_{CK}
- Programmable Write latency: 3 to 7 t_{CK}
- Programmable CRC READ latency: 0 to 2 t_{CK}
- Programmable CRC WRITE latency: 8 to 11 t_{CK}
- Digital t_{RAS} lockout
- RDQS mode on EDC pin
- Data output mode for Vendor ID, density and FIFO depth
- Low Power modes
- On-chip temperature sensor with read-out
- Auto refresh and self refresh modes
- 32ms data retention (8k cycles)
- Automatic temperature sensor controlled self refresh rate
- On-die termination (ODT): nom. values of 60 Ω or 120 Ω
- Pseudo open drain (POD-15) compatible outputs (40 Ω pulldown, 60 Ω pullup)
- ODT and output driver strength auto-calibration with external resistor ZQ pin (120 Ω)
- Programmable termination and driver strength offsets
- Selectable external or internal VREF for data inputs; programmable offsets for internal VREF
- Separate external VREF for address / command inputs
- Boundary Scan function with SEN pin
- Mirror function with MF pin
- $V_{\text{DD}} 1.5\text{V} \pm 3\%$
- $V_{\text{DDQ}} 1.5\text{V} \pm 3\%$
- PG-TFBGA 170
- RoHS Compliant Product¹⁾

1) RoHS Compliant Product: Restriction of the use of certain hazardous substances (RoHS) in electrical and electronic equipment as defined in the directive 2002/95/EC issued by the European Parliament and of the Council of 27 January 2003. These substances include mercury, lead, cadmium, hexavalent chromium, polybrominated biphenyls and polybrominated biphenyl ethers.

IDGV1G-05A1F1C
1Gbit GDDR5 Graphics RAM**TABLE 1**
Ordering Information

| Part Number ¹⁾ | Organization | Max. Data Rate (Gbps/pin) | Package |
|---------------------------|--------------|---------------------------|--------------|
| IDGV1G-05A1F1C – 40X | x32 / x16 | 4.0 | PG-TFBGA 170 |
| IDGV1G-05A1F1C – 50X | | 5.0 | |
| IDGV1G-05A1F1C – 55X | | 5.5 | |

1) I: Qimonda Identifier, D: DRAM, GV: GDDR5, 1G: 1Gbit, 0: 1 x CS, 5: x32, A1: 1st node, F1: FBGA, C: Commercial 0° - 85/95°C

1.2 Description

The Qimonda GDDR5 SGRAM is a high speed dynamic random-access memory designed for applications requiring high bandwidth. It contains 1,073,741,824 bits and is internally configured as a 16-bank DRAM.

The GDDR5 SGRAM uses a 8n prefetch architecture and DDR interface to achieve high-speed operation. It can be configured to operate in x32 mode or x16 (clamshell) mode. The mode is detected during device initialization. The GDDR5 interface transfers two 32 bit wide data words per WCK clock cycle to/from the I/O pins. Corresponding to the 8n prefetch a single write or read access consists of a 256 bit wide, two CK clock cycle data transfer at the internal memory core and eight corresponding 32 bit wide one-half WCK clock cycle data transfers at the I/O pins.

The GDDR5 SGRAM operates from a differential clock CK and \overline{CK} . Commands are registered at every rising edge of CK. Addresses are registered at every rising edge of CK and every rising edge of \overline{CK} .

GDDR5 replaces the pulsed strobes (WDQS & RDQS) used in previous DRAMs such as GDDR4 with a free running differential forwarded clock (WCK/ \overline{WCK}) with both input and output data registered and driven respectively at both edges of the forwarded WCK.


Read and write accesses to the GDDR5 SGRAM are burst oriented; accesses start at a selected location and continue for a total of eight data words. Accesses begin with the registration of an ACTIVE command, which is then followed by a READ or WRITE command. The address bits registered coincident with the ACTIVE command and the next rising CK edge are used to select the bank and the row to be accessed. The address bits registered coincident with the READ or WRITE command and the next rising \overline{CK} edge are used to select the bank and the column location for the burst access.



1.3 Operating Frequency Ranges

Figure 1 provides an overview of the operating frequency ranges for PLL-on and PLL-off operation in normal and RDQS modes.

FIGURE 1
Operating Modes and Frequency Ranges

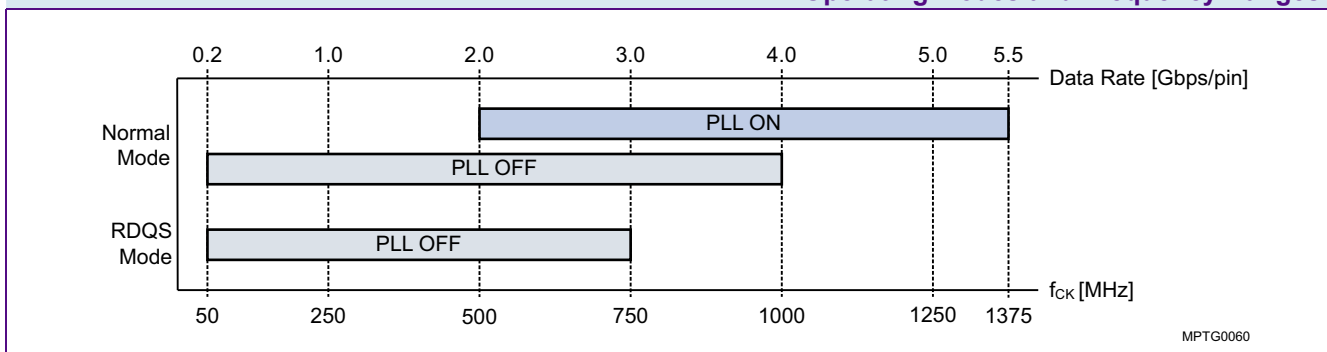



2 Configuration

2.1 Signal Description

TABLE 2
Signal Description

| Signal | Type | Detailed Function |
|--|-------|--|
| CK, $\overline{\text{CK}}$ | Input | Clock: CK and $\overline{\text{CK}}$ are differential clock inputs. Command inputs are latched on the rising edge of CK. Address inputs are latched on the rising edge of CK and the rising edge of $\overline{\text{CK}}$. All latencies are referenced to CK. CK and $\overline{\text{CK}}$ are externally terminated. |
| $\overline{\text{WCK01}}$, $\overline{\text{WCK01}}$, $\overline{\text{WCK23}}$, $\overline{\text{WCK23}}$ | Input | Data Clocks: $\overline{\text{WCK}}$ and $\overline{\text{WCK}}$ are differential clocks used for WRITE data capture and READ data output. $\overline{\text{WCK01}}/\overline{\text{WCK01}}$ is associated with DQ0-DQ15, $\overline{\text{DBI0}}$, $\overline{\text{DBI1}}$, EDC0 and EDC1. $\overline{\text{WCK23}}/\overline{\text{WCK23}}$ is associated with DQ16-DQ31, $\overline{\text{DBI2}}$, $\overline{\text{DBI3}}$, EDC2 and EDC3. WCK clocks operate at nominally twice the CK clock frequency. |
| CKE | Input | Clock Enable: $\overline{\text{CKE}}$ LOW activates and $\overline{\text{CKE}}$ HIGH deactivates internal clock, device input buffers and output drivers. Taking CKE HIGH provides Precharge Power-Down and Self Refresh operations (all banks idle), or Active Power-Down (row active in any bank). $\overline{\text{CKE}}$ is synchronous for Power-Down entry and exit and for Self Refresh entry and exit. $\overline{\text{CKE}}$ must be maintained LOW throughout READ and WRITE accesses. Input buffers excluding CK, $\overline{\text{CK}}$, $\overline{\text{CKE}}$, $\overline{\text{WCK01}}$, $\overline{\text{WCK01}}$, $\overline{\text{WCK23}}$, $\overline{\text{WCK23}}$ are disabled during Power-Down. Input buffers excluding $\overline{\text{CKE}}$ are disabled during Self Refresh. The value of $\overline{\text{CKE}}$ latched at power-up with $\overline{\text{RESET}}$ going HIGH determines the termination value of the address and command inputs. |
| $\overline{\text{CS}}$ | Input | Chip Select: $\overline{\text{CS}}$ LOW enables, and $\overline{\text{CS}}$ HIGH disables the command decoder. All commands are masked when $\overline{\text{CS}}$ is registered HIGH, but internal command execution continues. $\overline{\text{CS}}$ provides for individual device selection on memory channels with multiple memory devices. $\overline{\text{CS}}$ is considered part of the command code. |
| $\overline{\text{RAS}}$, $\overline{\text{CAS}}$, $\overline{\text{WE}}$ | Input | Command inputs: $\overline{\text{RAS}}$, $\overline{\text{CAS}}$, and $\overline{\text{WE}}$ (along with $\overline{\text{CS}}$) define the command to be entered. |
| BA0 - BA3 | Input | Bank Address inputs: BA0-BA3 select to which internal bank an ACTIVE, READ, WRITE or PRECHARGE command is being applied. BA0-BA3 also determine which Mode Register is accessed with a MODE REGISTER SET command. BA0-BA3 are sampled with the rising edge of CK. |
| A0 - A11 | Input | Address inputs: A0-A11 provide the row address for ACTIVE commands. A0-A5(A6) provide the column address and A8 defines the auto precharge function for READ and WRITE commands, to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during a MODE REGISTER SET command, and the data bits during LDFF commands. A8-A11 are sampled with the rising edge of CK and A0-A7 are sampled with the rising edge of CK. |
| DQ0 - DQ31 | I/O | Data Input/Output: 32 bit data bus |
| $\overline{\text{DBI0}}$ - $\overline{\text{DBI3}}$ | I/O | Data bus inversion: $\overline{\text{DBI0}}$ is associated with DQ0-DQ7, $\overline{\text{DBI1}}$ with DQ8-DQ15, $\overline{\text{DBI2}}$ with DQ16-DQ23, and $\overline{\text{DBI3}}$ with DQ24-DQ31. |



| Signal | Type | Detailed Function |
|--------------------|--------|---|
| EDC0 - EDC3 | Output | Error Detection Code: The calculated CRC data is transmitted on these pins. Used also for x16 mode detection, EDC hold pattern and RDQS function. EDC0 is associated with DQ0-DQ7, EDC1 with DQ8-DQ15, EDC2 with DQ16-DQ23, and EDC3 with DQ24-DQ31. |
| AB \bar{I} | Input | Address bus inversion |
| ZQ | - | Impedance Reference: external reference pin for auto-calibration |
| RESE \bar{T} | Input | Reset: RESE \bar{T} is a V_{DDQ} CMOS input. RESE \bar{T} LOW asynchronously initiates a full chip reset. With RESE \bar{T} LOW all ODTs are disabled. |
| MF | Input | Mirror Function: MF is a V_{DDQ} CMOS input. Must be tied to Power or Ground. |
| SEN | Input | Scan Enable: SEN is a V_{DDQ} CMOS input. Must be tied to Ground when not in use. |
| V_{REFC} | Supply | Reference voltage for command and address inputs. |
| V_{REFD} | Supply | Reference voltage for DQ and \bar{DBI} inputs. |
| V_{DD}, V_{SS} | Supply | Power and Ground for the internal logic. |
| V_{DDQ}, V_{SSQ} | Supply | Isolated power and ground for the input and output buffers. |
| NC | - | Not Connected. |

2.2 Ballout and Mirror Function Mode

The GDDR5 SGRAM provides a mirror function (MF) pin to change the physical location of command, address, data and WCK pins and assist in routing devices back to back. The pins affected by this Mirror Function mode are listed in **Table 3**. **Figure 2** and **Figure 3** show the ballouts for non-mirrored (MF=0) and mirrored (MF=1) modes.

TABLE 3
Ball Assignment with Mirror Function

| Ball | Signal | | Ball | Signal | | Ball | Signal | | Ball | Signal | | Ball | Signal | |
|------|--------------|--------------|------|--------|--------|------|--------|--------|------|--------------|--------------|------|--------------|--------------|
| | MF=0 | MF=1 | | MF=0 | MF=1 | | MF=0 | MF=1 | | MF=0 | MF=1 | | MF=0 | MF=1 |
| A2 | DQ1 | DQ25 | G3 | RAS | CAS | T4 | DQ26 | DQ2 | H11 | BA0 A2 | BA2 A4 | E13 | DQ13 | DQ21 |
| B2 | DQ3 | DQ27 | L3 | CAS | RAS | U4 | DQ24 | DQ0 | K11 | BA2 A4 | BA0 A2 | F13 | DQ15 | DQ23 |
| C2 | EDC0 | EDC3 | A4 | DQ0 | DQ24 | D5 | WCK01 | WCK23 | M11 | DQ22 | DQ14 | M13 | DQ23 | DQ15 |
| D2 | $\bar{DBI}0$ | $\bar{DBI}3$ | B4 | DQ2 | DQ26 | H5 | A9 A1 | A11 A6 | N11 | DQ20 | DQ12 | N13 | DQ21 | DQ13 |
| E2 | DQ5 | DQ29 | D4 | WCK01 | WCK23 | K5 | A11 A6 | A9 A1 | T11 | DQ18 | DQ10 | P13 | $\bar{DBI}2$ | $\bar{DBI}1$ |
| F2 | DQ7 | DQ31 | E4 | DQ4 | DQ28 | P5 | WCK23 | WCK01 | U11 | DQ16 | DQ8 | R13 | EDC2 | EDC1 |
| M2 | DQ31 | DQ7 | F4 | DQ6 | DQ30 | H10 | BA3 A3 | BA1 A5 | G12 | \bar{CS} | \bar{WE} | T13 | DQ19 | DQ11 |
| N2 | DQ29 | DQ5 | H4 | A10 A0 | A8 A7 | K10 | BA1 A5 | BA3 A3 | L12 | \bar{WE} | \bar{CS} | U13 | DQ17 | DQ9 |
| P2 | $\bar{DBI}3$ | $\bar{DBI}0$ | K4 | A8 A7 | A10 A0 | A11 | DQ8 | DQ16 | A13 | DQ9 | DQ17 | | | |
| R2 | EDC3 | EDC0 | M4 | DQ30 | DQ6 | B11 | DQ10 | DQ18 | B13 | DQ11 | DQ19 | | | |
| T2 | DQ27 | DQ3 | N4 | DQ28 | DQ4 | E11 | DQ12 | DQ20 | C13 | EDC1 | EDC2 | | | |
| U2 | DQ25 | DQ1 | P4 | WCK23 | WCK01 | F11 | DQ14 | DQ22 | D13 | $\bar{DBI}1$ | $\bar{DBI}2$ | | | |


Functions within the GDDR5 SGRAM that refer to external signals are transparent with respect to Mirror Function mode, meaning that the signal names shown in the respective functional description apply both to mirrored (MF=1) and non-mirrored (MF=0) modes. The referenced package pin is determined by the Mirror Function mode the device is configured to.



IDGV1G-05A1F1C
1Gbit GDDR5 Graphics RAM

FIGURE 2
Ballout, MF = 0 (Top View)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 |
|------------------|---------------------------|-------------------------|-------------------------|---------------------------|---|---|------------------|------------------------|------------------------|--------------------------|------------------|----|----|
| V _{SSQ} | DQ1 | V _{SSQ} | DQ0 | NC | | A | VREFD | DQ8 | V _{SSQ} | DQ9 | V _{SSQ} | | |
| V _{DDQ} | DQ3 | V _{DDQ} | DQ2 | V _{SS} | | B | V _{SS} | DQ10 | V _{DDQ} | DQ11 | V _{DDQ} | | |
| V _{SSQ} | EDC0 | V _{SSQ} | V _{SSQ} | V _{DD} | | C | V _{DD} | V _{SSQ} | V _{SSQ} | EDC1 | V _{SSQ} | | |
| V _{DDQ} | $\overline{\text{DBI0}}$ | V _{DDQ} | WCK01 | $\overline{\text{WCK01}}$ | | D | V _{SS} | V _{DD} | V _{DDQ} | $\overline{\text{DBI1}}$ | V _{DDQ} | | |
| V _{SSQ} | DQ5 | V _{SSQ} | DQ4 | V _{DDQ} | | E | V _{DDQ} | DQ12 | V _{SSQ} | DQ13 | V _{SSQ} | | |
| V _{DDQ} | DQ7 | V _{DDQ} | DQ6 | V _{SSQ} | | F | V _{SSQ} | DQ14 | V _{DDQ} | DQ15 | V _{DDQ} | | |
| V _{DD} | V _{DDQ} | $\overline{\text{RAS}}$ | V _{DD} | V _{SS} | | G | V _{SS} | V _{DD} | $\overline{\text{CS}}$ | V _{DDQ} | V _{DD} | | |
| V _{SS} | V _{SSQ} | V _{DDQ} | A10 A0 | A9 A1 | | H | BA3 A3 | BA0 A2 | V _{DDQ} | V _{SSQ} | V _{SS} | | |
| MF | $\overline{\text{RESET}}$ | $\overline{\text{CKE}}$ | $\overline{\text{ABI}}$ | NC | | J | SEN | $\overline{\text{CK}}$ | CK | ZQ | VREFC | | |
| V _{SS} | V _{SSQ} | V _{DDQ} | A8 A7 | A11 A6 | | K | BA1 A5 | BA2 A4 | V _{DDQ} | V _{SSQ} | V _{SS} | | |
| V _{DD} | V _{DDQ} | $\overline{\text{CAS}}$ | V _{DD} | V _{SS} | | L | V _{SS} | V _{DD} | $\overline{\text{WE}}$ | V _{DDQ} | V _{DD} | | |
| V _{DDQ} | DQ31 | V _{DDQ} | DQ30 | V _{SSQ} | | M | V _{SSQ} | DQ22 | V _{DDQ} | DQ23 | V _{DDQ} | | |
| V _{SSQ} | DQ29 | V _{SSQ} | DQ28 | V _{DDQ} | | N | V _{DDQ} | DQ20 | V _{SSQ} | DQ21 | V _{SSQ} | | |
| V _{DDQ} | $\overline{\text{DBI3}}$ | V _{DDQ} | WCK23 | $\overline{\text{WCK23}}$ | | P | V _{SS} | V _{DD} | V _{DDQ} | $\overline{\text{DBI2}}$ | V _{DDQ} | | |
| V _{SSQ} | EDC3 | V _{SSQ} | V _{SSQ} | V _{DD} | | R | V _{DD} | V _{SSQ} | V _{SSQ} | EDC2 | V _{SSQ} | | |
| V _{DDQ} | DQ27 | V _{DDQ} | DQ26 | V _{SS} | | T | V _{SS} | DQ18 | V _{DDQ} | DQ19 | V _{DDQ} | | |
| V _{SSQ} | DQ25 | V _{SSQ} | DQ24 | NC | | U | VREFD | DQ16 | V _{SSQ} | DQ17 | V _{SSQ} | | |

 = pin is OFF when configured to x16 mode

MPC0220



IDGV1G-05A1F1C
1Gbit GDDR5 Graphics RAM

FIGURE 3
Ballout, MF = 1 (Top View)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 |
|------------------|------------------|------------------|------------------|------------------|---|---|---|---|------------------|------------------|------------------|------------------|------------------|
| V _{SSQ} | DQ25 | V _{SSQ} | DQ24 | NC | | | | | VREFD | DQ16 | V _{SSQ} | DQ17 | V _{SSQ} |
| V _{DDQ} | DQ27 | V _{DDQ} | DQ26 | V _{SS} | | | | | V _{SS} | DQ18 | V _{DDQ} | DQ19 | V _{DDQ} |
| V _{SSQ} | EDC3 | V _{SSQ} | V _{SSQ} | V _{DD} | | | | | V _{DD} | V _{SSQ} | V _{SSQ} | EDC2 | V _{SSQ} |
| V _{DDQ} | DBI3 | V _{DDQ} | WCK23 | WCK23 | | | | | V _{SS} | V _{DD} | V _{DDQ} | DBI2 | V _{DDQ} |
| V _{SSQ} | DQ29 | V _{SSQ} | DQ28 | V _{DDQ} | | | | | V _{DDQ} | DQ20 | V _{SSQ} | DQ21 | V _{SSQ} |
| V _{DDQ} | DQ31 | V _{DDQ} | DQ30 | V _{SSQ} | | | | | V _{SSQ} | DQ22 | V _{DDQ} | DQ23 | V _{DDQ} |
| V _{DD} | V _{DDQ} | CAS | V _{DD} | V _{SS} | | | | | V _{SS} | V _{DD} | WE | V _{DDQ} | V _{DD} |
| V _{SS} | V _{SSQ} | V _{DDQ} | A8 A7 | A11 A6 | | | | | BA1 A5 | BA2 A4 | V _{DDQ} | V _{SSQ} | V _{SS} |
| MF | RESET | CKE | ABI | NC | | | | | SEN | CK | CK | ZQ | VREFC |
| V _{SS} | V _{SSQ} | V _{DDQ} | A10 A0 | A9 A1 | | | | | BA3 A3 | BA0 A2 | V _{DDQ} | V _{SSQ} | V _{SS} |
| V _{DD} | V _{DDQ} | RAS | V _{DD} | V _{SS} | | | | | V _{SS} | V _{DD} | CS | V _{DDQ} | V _{DD} |
| V _{DDQ} | DQ7 | V _{DDQ} | DQ6 | V _{SSQ} | | | | | V _{SSQ} | DQ14 | V _{DDQ} | DQ15 | V _{DDQ} |
| V _{SSQ} | DQ5 | V _{SSQ} | DQ4 | V _{DDQ} | | | | | V _{DDQ} | DQ12 | V _{SSQ} | DQ13 | V _{SSQ} |
| V _{DDQ} | DBI0 | V _{DDQ} | WCK01 | WCK01 | | | | | V _{SS} | V _{DD} | V _{DDQ} | DBI1 | V _{DDQ} |
| V _{SSQ} | EDC0 | V _{SSQ} | V _{SSQ} | V _{DD} | | | | | V _{DD} | V _{SSQ} | V _{SSQ} | EDC1 | V _{SSQ} |
| V _{DDQ} | DQ3 | V _{DDQ} | DQ2 | V _{SS} | | | | | V _{SS} | DQ10 | V _{DDQ} | DQ11 | V _{DDQ} |
| V _{SSQ} | DQ1 | V _{SSQ} | DQ0 | NC | | | | | VREFD | DQ8 | V _{SSQ} | DQ9 | V _{SSQ} |

= pin is OFF when configured to x16 mode

MPC020



2.3 Addressing

The GDDR5 SGRAM uses a DDR address scheme to reduce pins required on the GDDR5 SGRAM as shown in **Table 4**. The address should be provided to the GDDR5 SGRAM in two parts; the first half is latched on the rising edge of CK along with the command pins such as $\overline{\text{RAS}}$, $\overline{\text{CAS}}$ and $\overline{\text{WE}}$; the second half is latched on the rising edge of $\overline{\text{CK}}$.

The use of DDR addressing allows all address values to be latched in at the same rate as the SDR commands. All addresses related to command access have been positioned for latching on the initial rising edge for faster decoding.

TABLE 4
Address Pairs

| Clock Edge | Address Inputs | | | | | | | |
|-------------------------------|----------------|-----|-----|-----|-----|-----|----|-----|
| Rising CK | A8 | A11 | BA1 | BA2 | BA3 | BA0 | A9 | A10 |
| Rising $\overline{\text{CK}}$ | A7 | A6 | A5 | A4 | A3 | A2 | A1 | A0 |

Two addressing schemes are supported for x32 mode and x16 mode, which differ only in the number of valid column addresses, as shown in **Table 5**.

TABLE 5
Addressing Scheme

| | 32Mx32 | 64Mx16 |
|------------------|-------------------|-------------------|
| Row Address | A0-A11 | A0-A11 |
| Column addresses | A0-A5 | A0-A6 |
| Number of Banks | 16 | 16 |
| Bank address | BA0-BA3 | BA0-BA3 |
| Autoprecharge | A8 | A8 |
| Refresh | 8K/32 ms | 8K/32 ms |
| Refresh period | 3.9 μs | 3.9 μs |
| Page size | 2 KB | 2 KB |
| Bank Groups | 4 | 4 |



2.4 Commands

TABLE 6
Command Truth Table

| Operation | Code | $\overline{\text{CKE}}_{n-1}$ | $\overline{\text{CKE}}_n$ | $\overline{\text{CS}}$ | $\overline{\text{RAS}}$ | $\overline{\text{CAS}}$ | $\overline{\text{WE}}$ | BA3-BA0 | A11 | A10 | A8 | A6-A7, A9 | A0-A5 (A6) | Note |
|--|--------|-------------------------------|---------------------------|------------------------|-------------------------|-------------------------|------------------------|---------|-------------|-----|----|-----------|------------|----------|
| Device Deselect | DESEL | L | L | H | X | X | X | X | X | X | X | X | X | 1)2)8) |
| No Operation | NOP | L | L | L | H | H | H | X | X | X | X | X | X | 1)2)8) |
| Mode Register Set | MRS | L | L | L | L | L | L | MRA | OPCODE | | | | | 1)2)3) |
| Bank Activate | ACT | L | L | L | L | H | H | BA | Row Address | | | | | 1)2)4) |
| Read | RD | L | L | L | H | L | H | BA | L | L | L | X | CA | 1)2)5)9) |
| Read with Autoprecharge | RDA | L | L | L | H | L | H | BA | L | L | H | X | CA | 1)2)5) |
| Load FIFO | LDFF | L | L | L | H | L | H | BST | H | L | L | DATA | | 1)2)7) |
| Read Training | RDTR | L | L | L | H | L | H | X | H | H | L | X | X | 1)2) |
| Write | WR | L | L | L | H | L | L | BA | L | L | L | X | CA | 1)2)5) |
| Write with Autoprecharge | WRA | L | L | L | H | L | L | BA | L | L | H | X | CA | 1)2)5) |
| Write with Single Byte Mask | WSM | L | L | L | H | L | L | BA | L | H | L | X | CA | 1)2)5) |
| Write with Autoprecharge, Single Byte Mask | WSMA | L | L | L | H | L | L | BA | L | H | H | X | CA | 1)2)5) |
| Write with Double Byte Mask | WDM | L | L | L | H | L | L | BA | H | L | L | X | CA | 1)2)5) |
| Write with Autoprecharge, Double Byte Mask | WDMA | L | L | L | H | L | L | BA | H | L | H | X | CA | 1)2)5) |
| Write Training | WRTR | L | L | L | H | L | L | X | H | H | L | X | X | 1)2) |
| Precharge | PRE | L | L | L | L | H | L | BA | X | X | L | X | X | 1)2) |
| Precharge All | PREALL | L | L | L | L | H | L | X | X | X | H | X | X | 1)2) |
| Refresh | REF | L | L | L | L | L | H | X | X | X | X | X | X | 1)6) |
| Power Down Mode Entry | PDE | L | H | H | X | X | X | X | X | X | X | X | X | 1) |
| Power Down Mode Exit | PDX | H | L | H | X | X | X | X | X | X | X | X | X | 1) |
| Self Refresh Entry | SRE | L | H | L | L | L | H | X | X | X | X | X | X | 1)6) |
| Self Refresh Exit | SRX | H | L | H | X | X | X | X | X | X | X | X | X | 1) |

- 1) H = logic H level; L = logic L level; X = Don't Care. Signal may be H or L, but not floating
- 2) Addresses shown are logical addresses; physical addresses are inverted when address bus inversion (ABI) is activated and $\overline{\text{ABI}}=L$
- 3) BA0-BA3 provide the Mode Register address (MRA), A0-A11 the opcode to be loaded
- 4) BA0-BA3 provide the bank address (BA), A0-A11 provide the row address (RA)
- 5) BA0-BA3 provide the bank address, A0-A5 (A6) provide the column address (CA); no sub-word addressing within a burst of 8
- 6) This command is REFRESH when $\overline{\text{CKE}}(n) = L$, and Self Refresh Entry when $\overline{\text{CKE}}(n)$ is H
- 7) BA0-BA3 and CA are used to select burst location (BST) and data respectively
- 8) DESELECT and NO OPERATION are functionally interchangeable
- 9) In address training mode READ is decoded from the command pins only with $\overline{\text{RAS}} = H$, $\overline{\text{CAS}} = L$, $\overline{\text{WE}} = H$



3 Mode Registers

The Mode Registers define the specific mode of operation. MR0 to MR7 and MR15 are defined as shown in the overview in **Figure 4**. MR8 to MR14 are not used.

All Mode Registers are programmed via the MODE REGISTER SET (MRS) command and will retain the stored information until they are reprogrammed or a subsequent reset. Mode Registers must be loaded when all banks are idle and no bursts are in progress, and the controller must wait the specified time t_{MRD} before initiating any subsequent operation. Violating either of these requirements will result in unspecified operation.

All Mode Registers are initialized upon reset with all 0's (exception: MR4, bits A0-A3: '1111'). However, the user shall program all Mode Registers to the desired values e.g upon device initialization.

Reserved states should not be used, as unknown operation or incompatibility with future versions may result. RFU bits are reserved for future use and must be programmed to 0.

FIGURE 4
Mode Registers Overview

| | BA3 | BA2 | BA1 | BA0 | A11 | A10 | A9 | A8 | A7 | A6 | A5 | A4 | A3 | A2 | A1 | A0 |
|------|-----|-----|-----|-----|------------------------------------|--------|-------------------------------|--------------------------------|----------------------|---------|------------------------|-----------------------|----------------|----|----|----|
| MR0 | 0 | 0 | 0 | 0 | Write Recovery (WR) | | | Test Mode | CAS Latency (CLmrs) | | | Write Latency (WLmrs) | | | | |
| MR1 | 0 | 0 | 0 | 1 | PLL Reset | ABI | WDBI | RDBI | PLL | Cal Upd | Addr / Cmd Termination | Data Termination | Drive Strength | | | |
| MR2 | 0 | 0 | 1 | 0 | Address/Command Termination Offset | | Data / WCK Termination Offset | | Pullup Driver Offset | | Pulldown Driver Offset | | | | | |
| MR3 | 0 | 0 | 1 | 1 | Bank Groups | | WCK Termination | Info | RDQS Mode | WCK 2CK | WCK23 INV | WCK01 INV | Self Refresh | | | |
| MR4 | 0 | 1 | 0 | 0 | EDC13 INV | WR CRC | RD CRC | CRC Read Latency | CRC Write Latency | | EDC Hold Pattern | | | | | |
| MR5 | 0 | 1 | 0 | 1 | RAS | | | | PLL Bandwidth | | LP3 | LP2 | LP1 | | | |
| MR6 | 0 | 1 | 1 | 0 | VREFD Offset Bytes in rows A-F | | | VREFD Offset Bytes in rows M-U | | | VREFD | RFU | WCK PIN | | | |
| MR7 | 0 | 1 | 1 | 1 | RFU | | | Half VREFD | RFU | DQ PreA | RFU | LowF Mode | RFU | | | |
| MR15 | 1 | 1 | 1 | 1 | RFU | ADT | MRE MF1 | MRE MF0 | X | X | X | X | X | X | X | X |

MPBG0290



4 Electrical Characteristics

4.1 Absolute Maximum Ratings

TABLE 7
Absolute Maximum Ratings

| Parameter | Symbol | Ratings | | Unit |
|------------------------------|-----------|---------|------|------|
| | | Min. | Max. | |
| Device supply voltage | V_{DD} | -0.5 | 2.0 | V |
| Output buffer supply voltage | V_{DDQ} | -0.5 | 2.0 | V |
| Input Voltage | V_{IN} | -0.5 | 2.0 | V |
| Output Voltage | V_{OUT} | -0.5 | 2.0 | V |
| Storage Temperature | T_{STG} | -55 | +150 | °C |
| Junction Temperature | T_J | — | +125 | °C |
| Short Circuit Output Current | I_{OUT} | — | 50 | mA |

Attention: Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage of the device. This is a stress rating only, and functional operation of the device at these or any other conditions above those indicated in the operational sections of these specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



4.2 Operation Conditions

TABLE 8
DC Operating Conditions

| Parameter ¹⁾ | Symbol | POD-15 | | | Unit | Notes |
|--|-----------------|-------------------|------|-------------------|----------|------------|
| | | Min. | Typ. | Max. | | |
| Device supply voltage | V_{DD} | 1.455 | 1.5 | 1.545 | V | 2) |
| Output supply voltage | V_{DDQ} | 1.455 | 1.5 | 1.545 | V | 2) |
| Reference voltage for $\overline{DQ}/\overline{DBI}$ inputs | V_{REFD} | $0.69 * V_{DDQ}$ | | $0.71 * V_{DDQ}$ | V | 3)4) |
| Reference voltage for $\overline{DQ}/\overline{DBI}$ inputs | V_{REFD2} | $0.49 * V_{DDQ}$ | | $0.51 * V_{DDQ}$ | V | 3)4)5) |
| Reference voltage for command and address inputs | V_{REFC} | $0.69 * V_{DDQ}$ | | $0.71 * V_{DDQ}$ | V | 6) |
| Input logic high voltage for address/command inputs | $V_{IHA(DC)}$ | $V_{REFC} + 0.15$ | | — | V | |
| Input logic low voltage for address/command inputs | $V_{ILA(DC)}$ | — | | $V_{REFC} - 0.15$ | V | |
| Input logic high voltage for $\overline{DQ}/\overline{DBI}$ inputs with V_{REFD} | $V_{IHD(DC)}$ | $V_{REFD} + 0.1$ | | — | V | |
| Input logic low voltage for $\overline{DQ}/\overline{DBI}$ inputs with V_{REFD} | $V_{ILD(DC)}$ | — | | $V_{REFD} - 0.1$ | V | |
| Input logic high voltage for $\overline{DQ}/\overline{DBI}$ inputs with V_{REFD2} | $V_{IHD2(DC)}$ | $V_{REFD2} + 0.3$ | | — | V | |
| Input logic low voltage for $\overline{DQ}/\overline{DBI}$ inputs with V_{REFD2} | $V_{ILD2(DC)}$ | — | | $V_{REFD2} - 0.3$ | V | |
| Input logic high voltage for \overline{RESET} , $\overline{SEN} + \overline{MF}$ inputs | V_{IHR} | $V_{DDQ} - 0.5$ | | — | V | |
| Input logic low voltage for \overline{RESET} , $\overline{SEN} + \overline{MF}$ inputs | V_{ILR} | — | | 0.3 | V | |
| Input logic high voltage for EDC1/2 (x16 mode detect) | V_{IHx} | $V_{DDQ} - 0.3$ | | — | V | 7) |
| Input logic low voltage for EDC1/2 (x16 mode detect) | V_{ILx} | — | | 0.3 | V | 7) |
| CK, \overline{CK} , WCK and \overline{WCK} single ended input voltage | V_{INCK} | - 0.3 | | $V_{DDQ} + 0.3$ | V | |
| Clock input mid-point voltage | $V_{MP(DC)}$ | $V_{REFC} - 0.1$ | | $V_{REFC} + 0.1$ | V | 8)9)10)11) |
| CK/ \overline{CK} DC input differential voltage | $V_{IDCK(DC)}$ | 0.22 | | — | V | 9)11)12) |
| WCK/ \overline{WCK} DC input differential voltage | $V_{IDWCK(DC)}$ | 0.2 | | — | V | 9)13)14) |
| Input leakage current (any input $0 V \leq V_{IN} \leq V_{DDQ}$; all other pins not under test = 0 V) | I_{IL} | -5 | | +5 | μA | 15) |
| Output leakage current (DQs are disabled; $0 V \leq V_{OUT} \leq V_{DDQ}$) | I_{OZ} | -5 | | +5 | μA | |
| Output logic low voltage | $V_{OL(DC)}$ | — | | 0.62 | V | |
| External resistor value | ZQ | 115 | 120 | 125 | Ω | |

- 1) $0^{\circ}C \leq T_c \leq 95^{\circ}C$. All voltages are measured at the package pins.
- 2) GDDR5 SGRAMs are designed to tolerate PCB designs with separate V_{DDQ} and V_{DD} power regulators.
- 3) AC noise in the system is estimated at 50mV peak-to-peak for the purpose of DRAM design.
- 4) Source of reference voltage and control of Reference voltage for \overline{DQ} and \overline{DBI} pins is determined by V_{REFD} , Half V_{REFD} and V_{REFD} Offset Mode Registers.
- 5) V_{REFD} Offsets are not supported with V_{REFD2} .
- 6) External V_{REFC} is to be provided by the controller as there is no alternative supply.
- 7) V_{IHx} and V_{ILx} define the input voltage levels for the receiver that detects x32 mode or x16 mode with \overline{RESET} going HIGH..
- 8) This provides a minimum of 0.95V and a maximum of 1.15V, and is always 70% of V_{DDQ} with POD-15. DRAM timings relative to CK cannot be guaranteed if these limits are exceeded. .
- 9) For AC operations, all DC clock requirements must be satisfied as well.



IDGV1G-05A1F1C
1Gbit GDDR5 Graphics RAM

- 10) The value of V_{IXCK} and V_{IXWCK} is expected to equal 70% of V_{DDQ} for the transmitting device and must track variations of the DC level of the same.
- 11) The CK and \overline{CK} input reference level (for timing referenced to CK and \overline{CK}) is the point at which CK and \overline{CK} cross.
- 12) V_{IDCK} is the magnitude of the difference between the input level on CK and the input level on \overline{CK} .
- 13) The WCK and \overline{WCK} input reference level (for timing referenced to WCK and \overline{WCK}) is the point at which WCK and \overline{WCK} cross.
- 14) V_{IDWCK} is the magnitude of the difference between the input level on WCK and the input level on \overline{WCK} .
- 15) I_{IL} and I_{OL} are measured with ODT off.

TABLE 9
AC Operating Conditions

| Parameter ¹⁾²⁾ | Symbol | POD-15 | | | Unit | Notes |
|---|-----------------|-------------------|------|-------------------|------|-------|
| | | Min. | Typ. | Max. | | |
| Input logic high voltage for address/command inputs | $V_{IHA(AC)}$ | $V_{REFC} + 0.2$ | | — | V | |
| Input logic low voltage for address/command inputs | $V_{ILA(AC)}$ | — | | $V_{REFC} - 0.2$ | V | |
| Input logic high voltage for DQ/ \overline{DBI} inputs with V_{REFD} | $V_{IHD(AC)}$ | $V_{REFD} + 0.15$ | | — | V | |
| Input logic low voltage for DQ/ \overline{DBI} inputs with V_{REFD} | $V_{ILD(AC)}$ | — | | $V_{REFD} - 0.15$ | V | |
| Input logic high voltage for DQ/ \overline{DBI} inputs with V_{REFD2} | $V_{IHD2(AC)}$ | $V_{REFD} + 0.4$ | | — | V | |
| Input logic low voltage for DQ/ \overline{DBI} inputs with V_{REFD2} | $V_{ILD2(AC)}$ | — | | $V_{REFD} - 0.4$ | V | |
| CK/ \overline{CK} input differential voltage | $V_{IDCK(AC)}$ | 0.4 | | — | V | 3)4) |
| WCK/ \overline{WCK} input differential voltage | $V_{IDWCK(AC)}$ | 0.3 | | — | V | 5)6) |
| CK/ \overline{CK} input crossing point voltage | $V_{IXCK(AC)}$ | $V_{REFC} - 0.12$ | | $V_{REFC} + 0.12$ | V | 3)7) |
| WCK/ \overline{WCK} input crossing point voltage | $V_{IXWCK(AC)}$ | $V_{REFD} - 0.1$ | | $V_{REFD} + 0.1$ | V | 5)7) |


- 1) $0^{\circ}\text{C} \leq T_c \leq 95^{\circ}\text{C}$. All voltages are measured at the package pins.
- 2) For optimum performance it is recommended that signal swings are larger than shown in the table.
- 3) The CK and \overline{CK} input reference level (for timing referenced to CK and \overline{CK}) is the point at which CK and \overline{CK} cross.
- 4) V_{IDCK} is the magnitude of the difference between the input level on CK and the input level on \overline{CK} .
- 5) The WCK and \overline{WCK} input reference level (for timing referenced to WCK and \overline{WCK}) is the point at which WCK and \overline{WCK} cross..
- 6) V_{IDWCK} is the magnitude of the difference between the input level on WCK and the input level on \overline{WCK} .
- 7) The value of V_{IXCK} and V_{IXWCK} is expected to equal 70% of V_{DDQ} for the transmitting device and must track variations of the DC level of the same.



5 Package

5.1 Package Outline

FIGURE 5
Package Outline

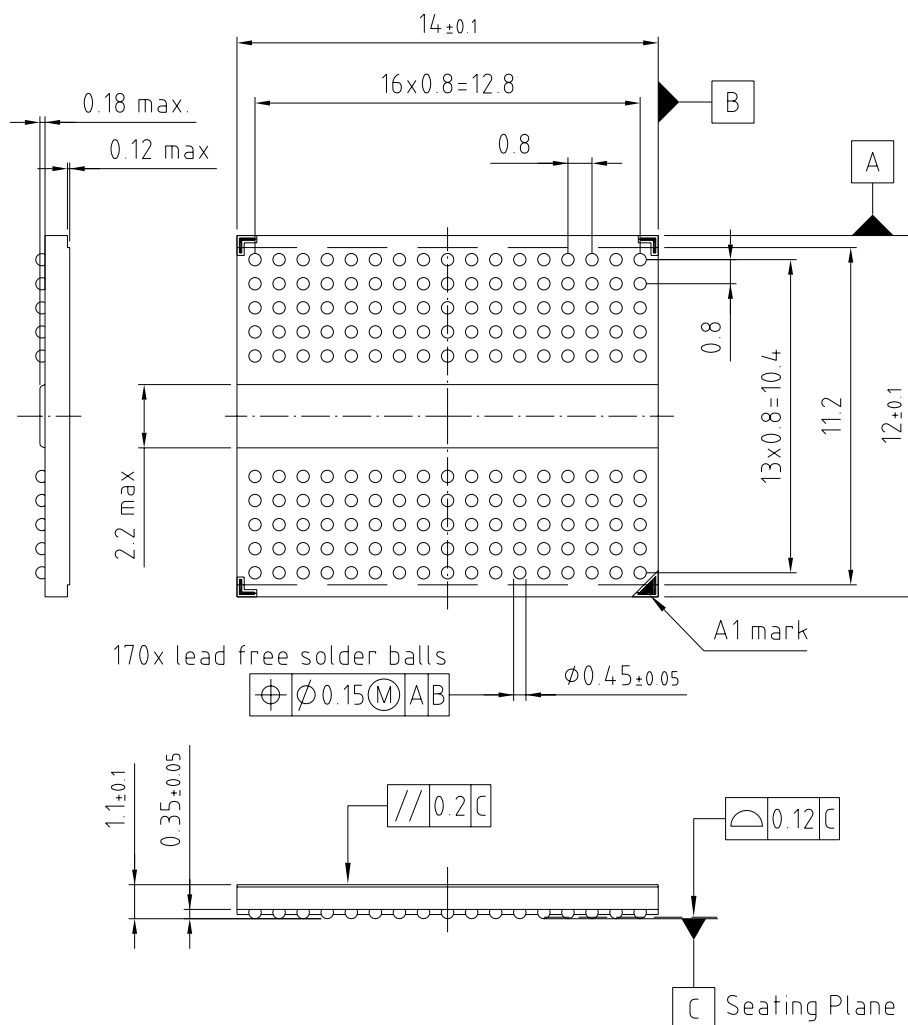

FPO_PG-TFBGA_-170-053



List of Illustrations

| | | |
|----------|--|----|
| Figure 1 | Operating Modes and Frequency Ranges | 5 |
| Figure 2 | Ballout, MF = 0 (Top View) | 8 |
| Figure 3 | Ballout, MF = 1 (Top View) | 9 |
| Figure 4 | Mode Registers Overview | 12 |
| Figure 5 | Package Outline | 16 |



List of Tables

| | | |
|---------|--|----|
| Table 1 | Ordering Information | 4 |
| Table 2 | Signal Description | 6 |
| Table 3 | Ball Assignment with Mirror Function | 7 |
| Table 4 | Address Pairs | 10 |
| Table 5 | Addressing Scheme | 10 |
| Table 6 | Command Truth Table | 11 |
| Table 7 | Absolute Maximum Ratings | 13 |
| Table 8 | DC Operating Conditions | 14 |
| Table 9 | AC Operating Conditions | 15 |



Contents

| | | |
|----------|---|----|
| | General Use Restriction | 3 |
| 1 | Overview | 3 |
| 1.1 | Features | 3 |
| 1.2 | Description | 4 |
| 1.3 | Operating Frequency Ranges | 5 |
| 2 | Configuration | 6 |
| 2.1 | Signal Description | 6 |
| 2.2 | Ballout and Mirror Function Mode | 7 |
| 2.3 | Addressing | 10 |
| 2.4 | Commands | 11 |
| 3 | Mode Registers | 12 |
| 4 | Electrical Characteristics | 13 |
| 4.1 | Absolute Maximum Ratings | 13 |
| 4.2 | Operation Conditions | 14 |
| 5 | Package | 16 |
| 5.1 | Package Outline | 16 |

Edition 2008-12
Published by Qimonda AG
Gustav-Heinemann-Ring 212
D-81739 München, Germany
© Qimonda AG 2008.
All Rights Reserved.

Legal Disclaimer

THE INFORMATION GIVEN IN THIS INTERNET DATA SHEET SHALL IN NO EVENT BE REGARDED AS A GUARANTEE OF CONDITIONS OR CHARACTERISTICS. WITH RESPECT TO ANY EXAMPLES OR HINTS GIVEN HEREIN, ANY TYPICAL VALUES STATED HEREIN AND/OR ANY INFORMATION REGARDING THE APPLICATION OF THE DEVICE, QIMONDA HEREBY DISCLAIMS ANY AND ALL WARRANTIES AND LIABILITIES OF ANY KIND, INCLUDING WITHOUT LIMITATION WARRANTIES OF NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS OF ANY THIRD PARTY.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Qimonda Office.

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Qimonda Office.

Under no circumstances may the Qimonda product as referred to in this Internet Data Sheet be used in

1. Any applications that are intended for military usage (including but not limited to weaponry), or
2. Any applications, devices or systems which are safety critical or serve the purpose of supporting, maintaining, sustaining or protecting human life (such applications, devices and systems collectively referred to as "Critical Systems"), if
 - a) A failure of the Qimonda product can reasonable be expected to - directly or indirectly -
 - (i) Have a detrimental effect on such Critical Systems in terms of reliability, effectiveness or safety; or
 - (ii) Cause the failure of such Critical Systems; or
 - b) A failure or malfunction of such Critical Systems can reasonably be expected to - directly or indirectly -
 - (i) Endanger the health or the life of the user of such Critical Systems or any other person; or
 - (ii) Otherwise cause material damages (including but not limited to death, bodily injury or significant damages to property, whether tangible or intangible).