

TECHNICAL DATA
DATA SHEET 843, REV. C**NEGATIVE ADJUSTABLE
1.5 AMP REGULATOR**

FEATURES:

- Isolated hermetic package (TO-257)
- Hot solder dipped
- Similar to industry type LM137HV
- Add Suffix "S" for S-100 Screening per MIL-PRF-38535
- Add Suffix "SA" for S-100 Screening per MIL-PRF-38535 and Group A per Method 5005 of MIL-STD-883

ABSOLUTE MAXIMUM RATINGS

Parameter	Conditions	MIN	MAX	Units
Output Current (I_{OUT})	-		1.5	A
Input to Output Voltage Differential	-	-0.3	50	V dc
Storage Temperature Range	-	-	-65 to +150	°C
Junction Temperature	-	-	+150	°C
Power Dissipation (P_D)	-	-	Internally Limited	
Maximum Thermal Resistance Junction to Case (θ_{JC})	-	-	4.2	°C/W
Ambient Operating Temperature Range (T_A)	Recommended Conditions	-	-55 to +125	°C

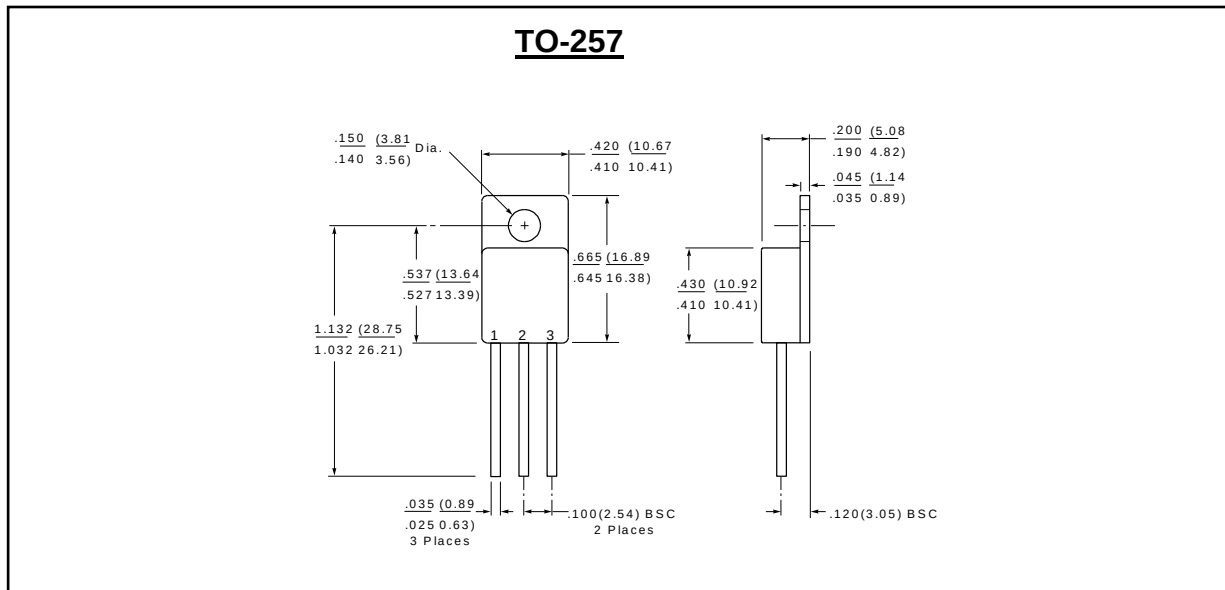
Note: Lead soldering temperature shall comply with MIL-STD-883 Test Method 2036.1 requirements.

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, $T_J = 25^\circ\text{C}$, $V_{IN} = -40\text{V}$, $I_{OUT} = 8.0\text{mA}$

Parameter	Conditions	Min	Typ.	Limit	Units
Reference Voltage	$V_{IN} = -4.25\text{V}$	-1.272	-	-1.230	V
	$V_{IN} = -42\text{V}$	-1.272	-	-1.230	V
	$V_{IN} = -4.25\text{V}$, $T_J = -55^\circ\text{C}$ to 125°C	-1.280	-	-1.225	V
	$V_{IN} = -41.3\text{V}$, $T_J = -55^\circ\text{C}$ to 125°C	-1.280	-	-1.225	V
Line Regulation	$-42\text{V} \leq V_{IN} \leq -4.25\text{V}$	-	-	9.4	mV
	$-41.3\text{V} \leq V_{IN} \leq -4.25\text{V}$, $T_J = -55^\circ\text{C}$ to 125°C	-	-	9.4	mV
Load Regulation	$8\text{mA} \leq I_{OUT} \leq 1.5\text{A}$, $V_{IN} = -6.25\text{V}$ $T_J = -55^\circ\text{C}$ to 125°C	-50	-	50	mV
Adjust Pin Current	$T_J = -55^\circ\text{C}$ to 125°C	-	50	100	μA
Adjust Pin Current Change	$8\text{mA} \leq I_{OUT} \leq 1.5\text{A}$, $V_{IN} = -6.25\text{V}$, $T_J = -55^\circ\text{C}$ to 125°C	-5.0	-	5.0	μA
	$-41.3\text{V} \leq V_{IN} \leq -4.25\text{V}$, $T_J = -55^\circ\text{C}$ to 125°C	-5.0	-	5.0	μA
Minimum Load Current	$V_{IN} = -41.3\text{V}$, $T_J = -55^\circ\text{C}$ to 125°C	-	-	5.0	mA
Current Limit	$V_{IN} = -5\text{V}$	-2.85	-	-1.6	A
	$V_{IN} = -50\text{V}$	-0.8	-	-0.2	A
Temperature Stability	$T_J = -55^\circ\text{C}$ to 125°C	-	1.0	-	%
Ripple Rejection Ratio	$V_{OUT} = -10\text{V}$, $f = 120\text{Hz}$, $C_{ADJ} = 0\mu\text{F}$	-	65	-	dB
	$V_{OUT} = -10\text{V}$, $f = 120\text{Hz}$, $C_{ADJ} = 10\mu\text{F}$	-	80	-	dB
Thermal Regulation	20 ms pulse	-	0.03	0.10	%/W
Long Term Stability ¹	$T_J = +125^\circ\text{C}$, $t = 1,000\text{hrs}$	-	0.3	1.0	%

¹Guaranteed but not tested

TECHNICAL DATA
DATA SHEET 843, REV. C**MECHANICAL DIMENSIONS in inches & mm****PINOUT TABLE**

TYPE	PIN 1	PIN 2	PIN 3
TO - 257, 1.5A Regulator	ADJUST	V _{IN}	V _{OUT}

PART ORDERING INFORMATION:

Part Number	Description
SHD526060S	Includes S-100 screening per MIL-PRF-38535
SHD526060SA	Includes S-100 screening per MIL-PRF-38535 and Group A testing per Method 5005 of MIL-STD-883

DISCLAIMER:

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.