



## Technical Data // ZRSL4-DR

Tension Spring Type | Protective Conductor Clamp

3 Connections



### Wire Sizes

Solid min	0.5 mm <sup>2</sup>
Solid max	6.0 mm <sup>2</sup>
Stranded (flexible) min	0.6mm <sup>2</sup>
Stranded (flexible) max	6.0 mm <sup>2</sup>
Stranded with ferrule min	0.5 mm <sup>2</sup>
Stranded with ferrule max	4.0 mm <sup>2</sup>

### Insulating Material

Material	PA 6.6
Flammability class	UL 94 V-0

### Temperatures

Working temperature	-40 - 120 °C
---------------------	--------------

### Dimensions

Width	6.1 mm
Length	78.5 mm
Height TS35 x 7.5	42.0 mm

### ELECTRICAL DATA

#### General

Test pick off	2
---------------	---

### COLOURS



GREEN/YELLOW




## Technical Data // ZRSL4-DR

Tension Spring Type | Protective Conductor Clamp

3 Connections

### CONNECTION DIAGRAM

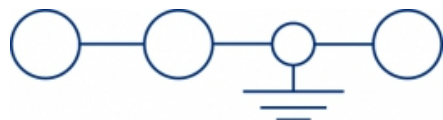

### ORDER DATA

Article Designation	Article Number	PU
ZRSL4-DR-GREEN/YELLOW	43526.2	100

### ACCESSOIRES

Article Designation	Article Number	PU
End Plate ZAP4/3A	493704.2	50
Four-Way Covers ZAD4/4/B	493707.0	20
Endstützen ZES35	493748.2	50
Test Adapter ZTA4	493741.2	10
Quick Labelling PSB6/50	494702.7	500

### RATINGS

Ratings	CSA	CSAus	IEC
Rated voltage			
Rated current			
Rated wire size	AWG 20-10	AWG 20-10	4.0 mm <sup>2</sup>
Rated impulse voltage			8 kV
Pollution degree			3