DASH NO.	DESCRIPTION	MADE FROM

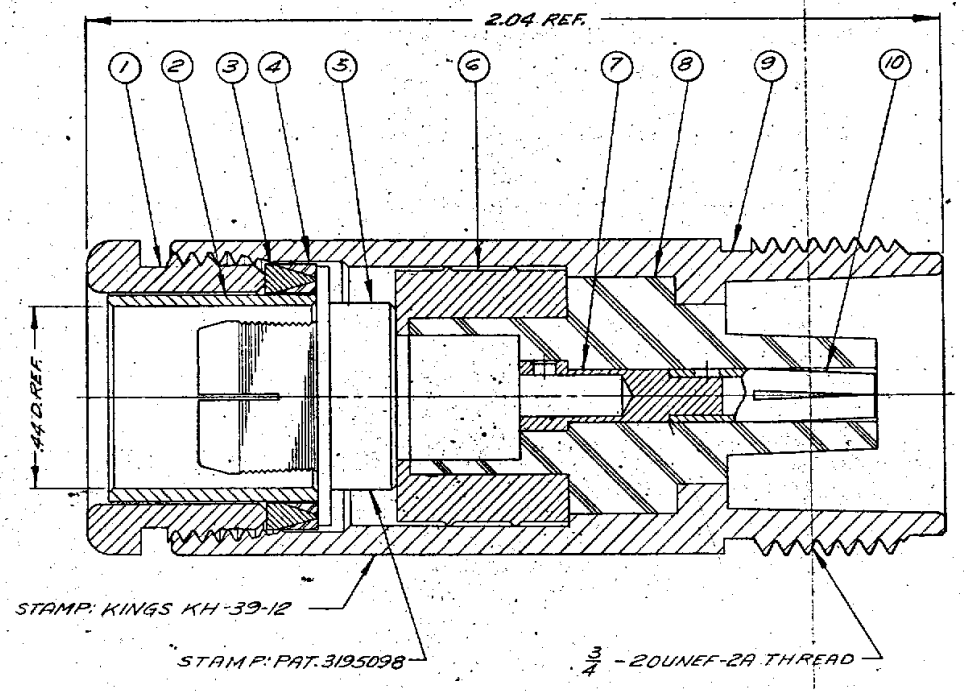

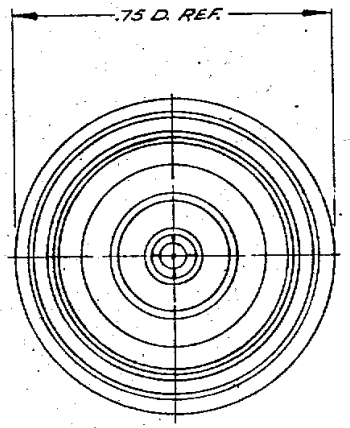

KH-39-12

NOTES:

1. FOR USE WITH RG-9, 9A, 9B & 214/U CABLE.
2. FOR CABLING INSTRUCTION SEE CP-208A.
3. FOR CABLE TRIMMING USE KTJ-23 & KTD-82.
4. FOR FORMING USE CRIMP DIE SIZE 04.

ITEM	REQ'D	DESCRIPTION	PART NO.
9	1	BODY	
8	1	INSULATOR	
7	1	HN CONTACT ASS'Y F	60D-6-M07
6	1	RETAINER	
5	1	K-GRIP	S-89-351-M07
4	1	GASKET	571-3-M99
3	1	GLAND	S-89-359-M07
2	1	K-GRIP SLEEVE	S-89-24-2-M07
1	1	CLAMP NUT	S-89-35-5-M07

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
   3 PLACE DECIMALS ± .004 ANGLES ± 0° 30'
   T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS. BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

REVISIONS

ISSUE	CHANGES
9	CN 16734 E GA 1 FEB 77

USED ON:

REF:

FINISH

SPEC.

MATL.

SPEC.

HN JACK

DRAWN BG. DATE 21 FEB 73

APPR. R.T. DATE 22 FEB 73

KINGS ELECTRONICS
40 MARBLEDALE ROAD
TUCKAHOE, N. Y. 10707

KH-39-12

S-D

DIETZGEN 199M 12118