File No.	392	SHEET	1/1

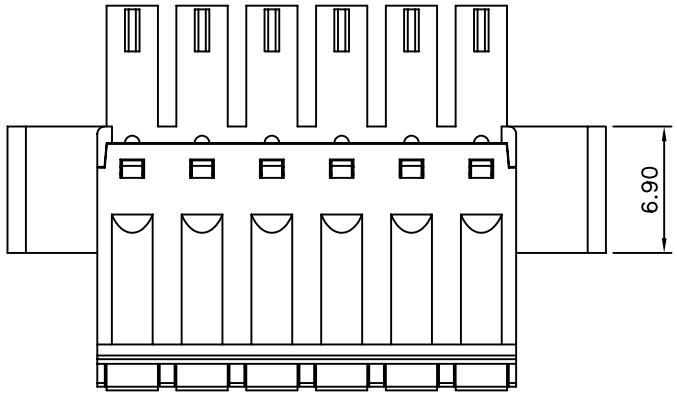

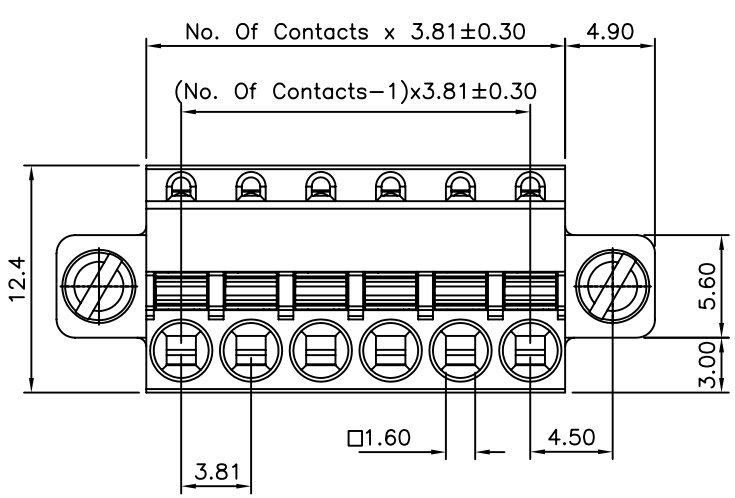

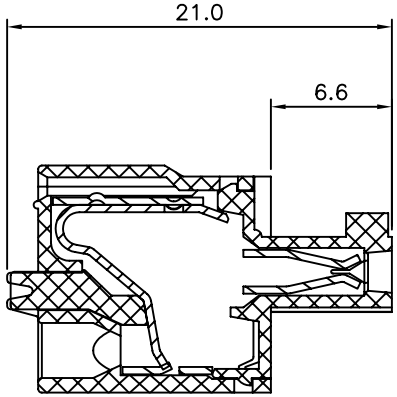

SPECIFICATIONS

Voltage Rating: 160VAC
Current Rating: 8 Amps/Way Max.
Contact Resistance: 20 Milliohms(Max.)
Insulation Resistance: 5000 Megohms/1000V
Withstanding Voltage: 1500V AC(1Min) Test Time=60Sec/1pcs
Wire Range: 16~28AWG
Operating Temperature: −33°C~+120°C
Wire Guard: PhBz
Inslator Body(Housing): Polyamide(Glass Filled)(UL 94V−0)

A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	MEI
PART No.	TBX38XXSWE	CHECKED BY	HZF
DRAWING No.	TBX38XXSWE	DRAWING BY	PEGA
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.10
ANG. ±1°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	10/03/2006