

**TENTATIVE TOSHIBA HYBRID DIGITAL INTEGRATED CIRCUIT
67,108,864-WORD BY 72-BIT SYNCHRONOUS DRAM MODULE**

DESCRIPTION


The THMY51E01B is a 67,108,864-word by 72-bit synchronous dynamic RAM module consisting of 18 TC59SM808BFT DRAMs and an unbuffer on a printed circuit board.

FEATURES

- 67,108,864-word by 72-bit (double-bank) organization
- Single power supply of 3.3 V ± 0.3 V
- Pipeline architecture
- Auto-Refresh and Self-Refresh capability
- All inputs and outputs LVTTTL-compatible
- 4096 Refresh cycles per 64 ms
- Package: 168-pin DIMM (gold contacts)
- Based on Intel Rev. 1.0 (4-clock)

| | | | |
|---|--------|--------|-------|
| | 70 | 75 | 80 |
| t _{CK} Clock Cycle Time (CL = 3) | 7 ns | 7.5 ns | 8 ns |
| t _{RAS} Active-to-Precharge Command Period (min) | 40 ns | 45 ns | 48 ns |
| t _{AC} Access Time from CLK (CL = 3) | 5.4 ns | 5.4 ns | 6 ns |
| t _{RC} Ref/Active-to-Ref/Active Command Period (min) | 56 ns | 65 ns | 68 ns |

PIN ASSIGNMENT (TOP VIEW)

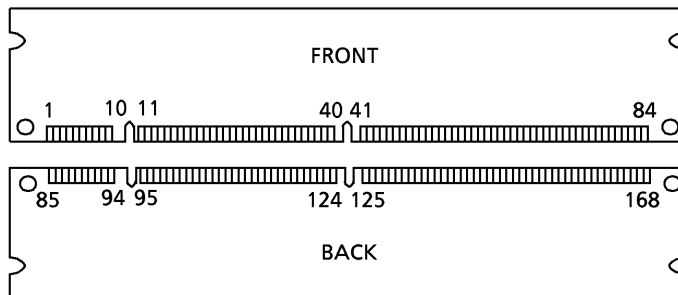

PIN NAMES

| | |
|---------------|-----------------------------|
| A0 ~ A12 | Address Inputs |
| BA0, BA1 | Bank Select |
| DQ0 ~ DQ63 | Data Inputs / Outputs |
| CB0 ~ CB7 | Check Bits |
| /CS0 ~ /CS3 | Chip Select |
| /RAS | Row Address Strobe |
| /CAS | Column Address Strobe |
| /WE | Write Enable |
| DQMB0 ~ DQMB7 | Output Disable / Write Mask |
| CLK0 ~ CLK3 | Clock Input |
| CKE0, CKE1 | Clock Enable |
| SDA | Serial Data/Address for PD |
| SCL | Clock for PD |
| SA0 ~ SA2 | Address for PD |
| VDD | Power (+3.3 V) |
| VSS | Ground |
| NC | No Connection |

| | | | | | | | | | | | |
|----|-------|-----|-------|----|-------|-----|-------|----|---------|-----|------|
| 1 | VSS | 85 | VSS | 29 | DQMB1 | 113 | DQMB5 | 57 | DQ18 | 141 | DQ50 |
| 2 | DQ0 | 86 | DQ32 | 30 | /CS0 | 114 | /CS1 | 58 | DQ19 | 142 | DQ51 |
| 3 | DQ1 | 87 | DQ33 | 31 | NC | 115 | /RAS | 59 | VDD | 143 | VDD |
| 4 | DQ2 | 88 | DQ34 | 32 | VSS | 116 | VSS | 60 | DQ20 | 144 | DQ52 |
| 5 | DQ3 | 89 | DQ35 | 33 | A0 | 117 | A1 | 61 | NC | 145 | NC |
| 6 | VDD | 90 | VDD | 34 | A2 | 118 | A3 | 62 | NC | 146 | NC |
| 7 | DQ4 | 91 | DQ36 | 35 | A4 | 119 | A5 | 63 | CKE1 | 147 | NC |
| 8 | DQ5 | 92 | DQ37 | 36 | A6 | 120 | A7 | 64 | VSS | 148 | VSS |
| 9 | DQ6 | 93 | DQ38 | 37 | A8 | 121 | A9 | 65 | DQ21 | 149 | DQ53 |
| 10 | DQ7 | 94 | DQ39 | 38 | A10 | 122 | BA0 | 66 | DQ22 | 150 | DQ54 |
| 11 | DQ8 | 95 | DQ40 | 39 | BA1 | 123 | A11 | 67 | DQ23 | 151 | DQ55 |
| 12 | VSS | 96 | VSS | 40 | VDD | 124 | VDD | 68 | VSS | 152 | VSS |
| 13 | DQ9 | 97 | DQ41 | 41 | VDD | 125 | CLK1 | 69 | DQ24 | 153 | DQ56 |
| 14 | DQ10 | 98 | DQ42 | 42 | CLK0 | 126 | A12 | 70 | DQ25 | 154 | DQ57 |
| 15 | DQ11 | 99 | DQ43 | 43 | VSS | 127 | VSS | 71 | DQ26 | 155 | DQ58 |
| 16 | DQ12 | 100 | DQ44 | 44 | NC | 128 | CKE0 | 72 | DQ27 | 156 | DQ59 |
| 17 | DQ13 | 101 | DQ45 | 45 | /CS2 | 129 | /CS3 | 73 | VDD | 157 | VDD |
| 18 | VDD | 102 | VDD | 46 | DQMB2 | 130 | DQMB6 | 74 | DQ28 | 158 | DQ60 |
| 19 | DQ14 | 103 | DQ46 | 47 | DQMB3 | 131 | DQMB7 | 75 | DQ29 | 159 | DQ61 |
| 20 | DQ15 | 104 | DQ47 | 48 | NC | 132 | NC | 76 | DQ30 | 160 | DQ62 |
| 21 | CB0 | 105 | CB4 | 49 | VDD | 133 | VDD | 77 | DQ31 | 161 | DQ63 |
| 22 | CB1 | 106 | CB5 | 50 | NC | 134 | NC | 78 | VSS | 162 | VSS |
| 23 | VSS | 107 | VSS | 51 | NC | 135 | NC | 79 | CLK2 | 163 | CLK3 |
| 24 | NC | 108 | NC | 52 | CB2 | 136 | CB6 | 80 | NC | 164 | NC |
| 25 | NC | 109 | NC | 53 | CB3 | 137 | CB7 | 81 | NC (WP) | 165 | SA0 |
| 26 | VDD | 110 | VDD | 54 | VSS | 138 | VSS | 82 | SDA | 166 | SA1 |
| 27 | /WE | 111 | /CAS | 55 | DQ16 | 139 | DQ48 | 83 | SCL | 167 | SA2 |
| 28 | DQMB0 | 112 | DQMB4 | 56 | DQ17 | 140 | DQ49 | 84 | VDD | 168 | VDD |

00070FBA2

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.


SERIAL PRESENCE DETECT (Rev.1.2B)

| Byte Number | Function | 70 | | 75 | | 80 | |
|-------------|---|--------------------------|-------|--------------------------|-------|--------------------------|-------|
| | | Entry Value | Entry | Entry Value | Entry | Entry Value | Entry |
| 0 | Defines # of Bytes of information Written into Serial Memory by Module Manufacturer Group | 128 Bytes | 80h | 128 Bytes | 80h | 128 Bytes | 80h |
| 1 | Total # of Bytes in SPD Memory Device | 256 Bytes | 08h | 256 Bytes | 08h | 256 Bytes | 08h |
| 2 | Fundamental Memory Type (FPM, EDO, SDRAM...) from Appendix A | SDRAM | 04h | SDRAM | 04h | SDRAM | 04h |
| 3 | # of Row Addresses on this Assembly | RA0 ~ RA12 | 0Dh | RA0 ~ RA12 | 0Dh | RA0 ~ RA12 | 0Dh |
| 4 | # of Column Addresses on this Assembly | CA0 ~ CA9 | 0Ah | CA0 ~ CA9 | 0Ah | CA0 ~ CA9 | 0Ah |
| 5 | # of Module Banks on this Assembly | 2 Bank | 02h | 2 Bank | 02h | 2 Bank | 02h |
| 6 | Data Width of this Assembly... | x72 | 48h | x72 | 48h | x72 | 48h |
| 7 | ...Data Width Continuation | x72 | 00h | x72 | 00h | x72 | 00h |
| 8 | Voltage Interface Standard for this Assembly | LVTTL | 01h | LVTTL | 01h | LVTTL | 01h |
| 9 | SDRAM Cycle Time at Max. Supported CAS Latency (CL), @ CL = X | CL = 3, 7.0 ns | 70h | CL = 3, 7.5 ns | 75h | CL = 3, 8.0 ns | 80h |
| 10 | SDRAM Access from Clock @ CL = X | CL = 3, 5.4 ns | 54h | CL = 3, 5.4 ns | 54h | CL = 3, 6.0 ns | 60h |
| 11 | DIMM Configuration Type (Non-parity, Parity, ECC) | ECC | 02h | ECC | 02h | ECC | 02h |
| 12 | Refresh Rate/Type | 7.8 μ s/Self-Refresh | 82h | 7.8 μ s/Self-Refresh | 82h | 7.8 μ s/Self-Refresh | 82h |
| 13 | SDRAM Width, Primary DRAM | x8 | 08h | x8 | 08h | x8 | 08h |
| 14 | Error Checking SDRAM Data Width | x8 | 08h | x8 | 08h | x8 | 08h |
| 15 | Minimum Clock Delay, Back-to-Back Random Column Addresses | 1 CLK | 01h | 1 CLK | 01h | 1 CLK | 01h |
| 16 | Burst Lengths Supported | 1, 2, 4, 8, Full page | 8Fh | 1, 2, 4, 8, Full page | 8Fh | 1, 2, 4, 8, Full page | 8Fh |
| 17 | # of Banks on Each SDRAM Device | 4 Banks | 04h | 4 Banks | 04h | 4 Banks | 04h |
| 18 | CAS # Latencies Supported | 2, 3 | 06h | 2, 3 | 06h | 2, 3 | 06h |
| 19 | CS # Latency | | 01h | | 01h | | 01h |
| 20 | WE # Latency | | 01h | | 01h | | 01h |
| 21 | SDRAM Module Attributes | | 00h | | 00h | | 00h |
| 22 | SDRAM Device Attributes: General | | 0Eh | | 0Eh | | 0Eh |
| 23 | Minimum Clock Cycle Time @ CL- X-1 | CL = 2, 7.5 ns | 75h | CL = 2, 10 ns | A0h | CL = 2, 10 ns | A0h |
| 24 | Maximum Data Access Time from Clock @ CL X-1 | CL = 2, 5.4 ns | 54h | CL = 2, 6.0 ns | 60h | CL = 2, 6.0 ns | 60h |
| 25 | Minimum Clock Cycle Time @ CL X-2 | | 00h | | 00h | | 00h |
| 26 | Maximum Data Access Time from Clock @ CL X-2 | | 00h | | 00h | | 00h |
| 27 | Minimum Row Precharge Time | 15 ns | 0Fh | 20 ns | 14h | 20 ns | 14h |
| 28 | Minimum Row-Active-to-Row-Active Delay | 15 ns | 0Fh | 15 ns | 0Fh | 20 ns | 14h |
| 29 | Minimum RAS-to-CAS Delay | 15 ns | 0Fh | 20 ns | 14h | 20 ns | 14h |
| 30 | Minimum RAS Pulse Width | 42 ns | 2Ah | 45 ns | 2Dh | 48 ns | 30h |
| 31 | Module/Bank Density | 256 MB | 40h | 256 MB | 40h | 256 MB | 40h |
| 32 | CMD & Add Input Set-up time | 1.5 ns | 15h | 1.5 ns | 15h | 2 ns | 20h |
| 33 | CMD & Add Input Hold time | 0.8 ns | 08h | 0.8 ns | 08h | 1 ns | 10h |
| 34 | Data Input Set-up time | 1.5 ns | 15h | 1.5 ns | 15h | 2 ns | 20h |
| 35 | Data Input Hold time | 0.8 ns | 08h | 0.8 ns | 08h | 1 ns | 10h |
| 36-61 | Superset Information (may be used in future) | | 00h | | 00h | | FFh |
| 62 | SPD Revision | Rev. 1.2B | 12h | Rev. 1.2B | 12h | Rev. 1.2B | 12h |
| 63 | Check sum for Bytes 0 ~ 62 | 49Ch | 9Ch | 4E5h | E5h | 1F10h | 10h |



OPTIONAL

| | | | | | | | |
|---------|--|---------------------|-----|---------------------|-----|---------------------|-----|
| 64 | Manufacturers JEDEC ID Code (JEP-106E) | | | | | | |
| 65-71 | | | | | | | |
| 72 | Place of Manufacture | | | | | | |
| 73-90 | Manufacturer's Part Number | | | | | | |
| 91-92 | Revision Code | | | | | | |
| 93-94 | Date of Manufacture | | | | | | |
| 95-98 | Assembly Serial Number | | | | | | |
| 99-125 | Manufacturer-Specific Data | | | | | | |
| 126 | Reserved | Intel Specification | 64h | Intel Specification | 64h | Intel Specification | 64h |
| 127 | Reserved | Intel Specification | F7h | Intel Specification | F7h | Intel Specification | F7h |
| 128-255 | | | | | | | |

BLOCK DIAGRAM

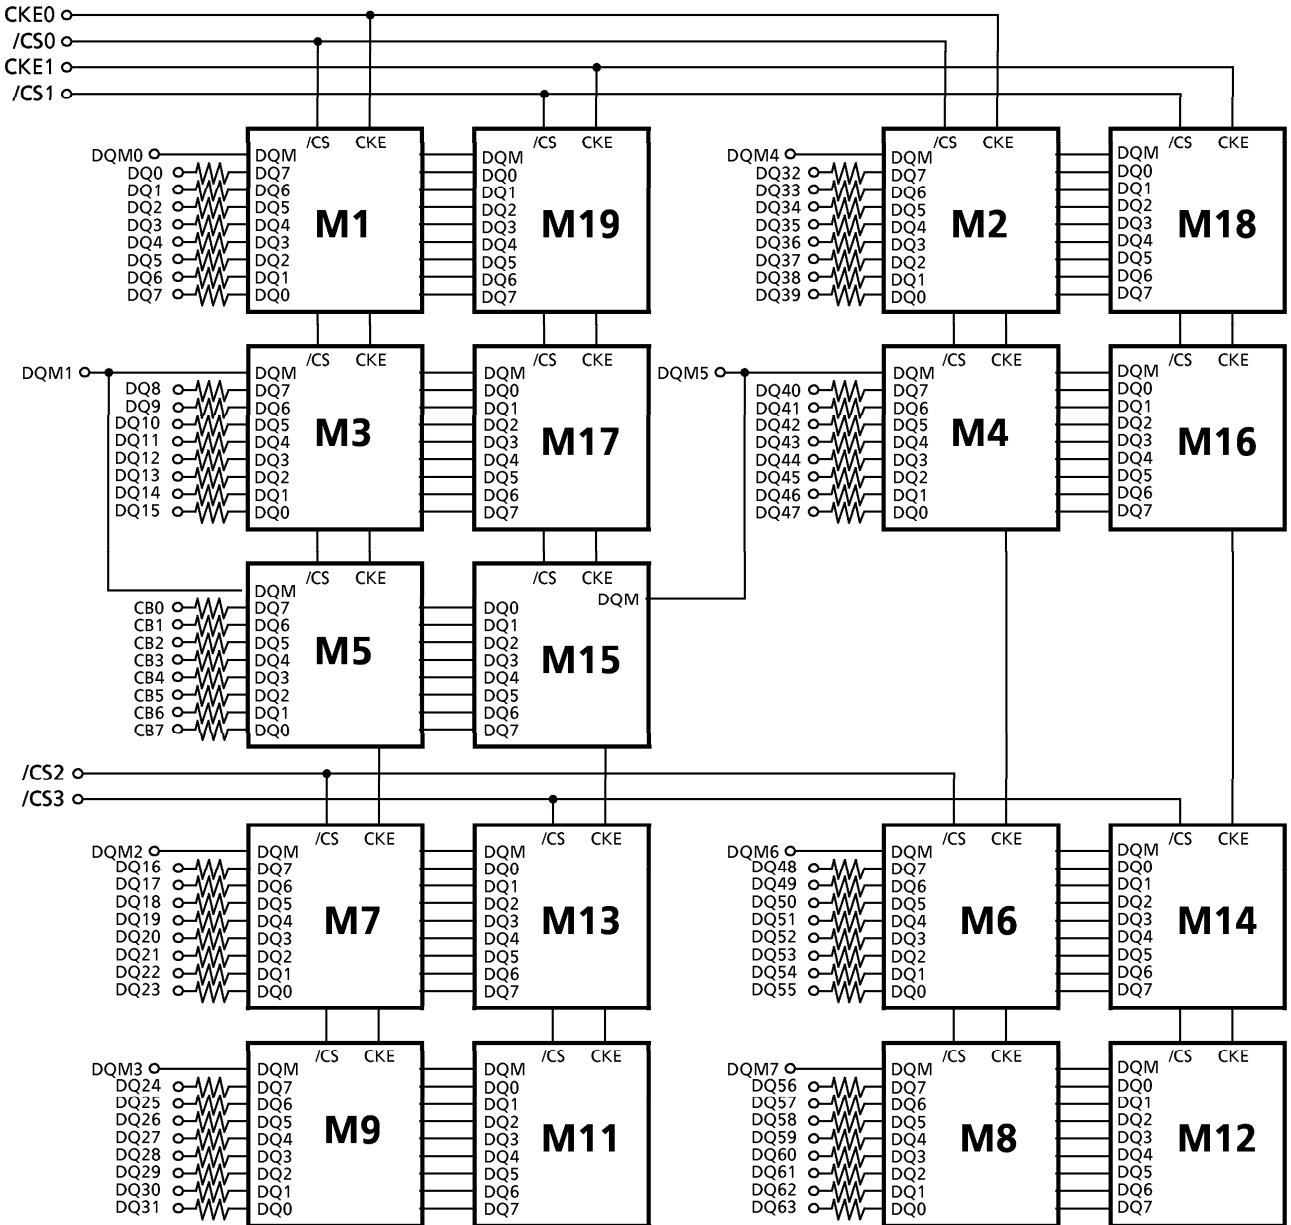

<SDRAM : M1-19>

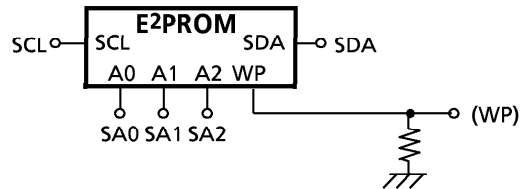

- CLK0 → CLK : SDRAM M1- M5
- CLK1 → CLK : SDRAM M15 - M19
- CLK2 → CLK : SDRAM M6 - M9
- CLK3 → CLK : SDRAM M11 - M14

- /RAS → /RAS : SDRAM M1-M19
- /CAS → /CAS : SDRAM M1-M19
- /WE → /WE : SDRAM M1-M19
- A0-A12 → A0-A12 : SDRAM M1-M19
- BA0 → BA0 : SDRAM M1-M19
- BA1 → BA1 : SDRAM M1-M19

ABSOLUTE MAXIMUM RATINGS

| SYMBOL | ITEM | RATING | UNIT | NOTES |
|-----------|------------------------------|--------------------------|------|-------|
| V_{IN} | Input Voltage | $-0.5 \sim V_{DD} + 0.3$ | V | 1 |
| V_{OUT} | Output Voltage | $-0.5 \sim V_{DD} + 0.3$ | V | 1 |
| V_{DD} | Power Supply Voltage | $-0.3 \sim 4.6$ | V | 1 |
| T_{OPR} | Operating Temperature | $0 \sim 70$ | °C | 1 |
| T_{STG} | Storage Temperature | $-55 \sim 125$ | °C | 1 |
| P_D | Power Dissipation | 12.2 | W | 1 |
| I_{OUT} | Short-Circuit Output Current | 50 | mA | 1 |

RECOMMENDED DC OPERATING CONDITIONS ($T_a = 0^\circ \sim 70^\circ\text{C}$)

| SYMBOL | PARAMETER | MIN | TYP. | MAX | UNIT | NOTES |
|----------|--------------------------|------|------|----------------|------|-------|
| V_{DD} | Supply Voltage | 3.0 | 3.3 | 3.6 | V | 2 |
| V_{IH} | LVTTL Input High Voltage | 2.0 | - | $V_{DD} + 0.3$ | V | 2 |
| V_{IL} | LVTTL Input Low Voltage | -0.5 | - | 0.8 | V | 2 |

Note: $V_{IH}(\text{max}) = V_{DD} + 1.2\text{v}$ for pulse width $\leq 5\text{ns}$
 $V_{IL}(\text{min}) = V_{SS} - 1.2\text{v}$ for pulse width $\leq 5\text{ns}$

CAPACITANCE ($V_{DD} = 3.3\text{V}$, $f = 1\text{MHz}$, $T_a = 0^\circ \sim 70^\circ\text{C}$)

| SYMBOL | PARAMETER | MIN | MAX | UNIT |
|----------|---|-----|-----|------|
| C_1 | Input Capacitance (A0 ~ A12) | - | 105 | pF |
| C_2 | Input Capacitance (\overline{RAS} , \overline{CAS} , \overline{WE} , BA0, BA1) | - | 105 | pF |
| C_3 | Input Capacitance (CLK0 ~ CLK3) | - | 45 | pF |
| C_4 | Input Capacitance ($\overline{CS0} \sim \overline{CS3}$) | - | 40 | pF |
| C_5 | Input Capacitance (DQMB0 ~ DQMB7) | - | 30 | pF |
| C_6 | Input Capacitance (CKE0, 1) | - | 60 | pF |
| C_{DQ} | I/O Capacitance (DQ0~DQ63, CB0 ~ CB7) | - | 25 | pF |

DC CHARACTERISTICS ($V_{DD} = 3.3\text{ V} \pm 0.3\text{ V}$, $T_a = 0^\circ \sim 70^\circ\text{C}$)

| SYMBOL | ITEM | 70 | | 75 | | 80 | | UNIT | NOTES | |
|-------------|--|-------------------------------------|-----|------|-----|------|-----|------|---------------|---------|
| | | MIN | MAX | MIN | MAX | MIN | MAX | | | |
| I_{CC1} | OPERATING CURRENT Active-Precharge Command Cycling without Burst Operation ($t_{CK} = \text{min}$, $t_{RC} = \text{min}$) | 1-Bank Operation | - | 1080 | - | 990 | - | 900 | mA | 3, 5 |
| I_{CC2} | STANDBY CURRENT ($t_{CK} = \text{min}$, $\overline{CS} = V_{IH}$, $V_{IH/L} = V_{IH}(\text{min}) / V_{IL}(\text{max})$ Bank: Inactive State) | CKE = V_{IH} | - | 720 | - | 630 | - | 540 | mA | 3 |
| I_{CC2P} | | CKE = V_{IL} (Power-Down Mode) | - | 18 | - | 18 | - | 18 | | |
| I_{CC2S} | STANDBY CURRENT (CLK = V_{IL} , $\overline{CS} = V_{IH}$, $V_{IH/L} = V_{IH}(\text{min}) / V_{IL}(\text{max})$ Bank: Inactive State) | CKE = V_{IH} | - | 180 | - | 180 | - | 180 | mA | |
| I_{CC2PS} | | CKE = V_{IL} (Power-Down Mode) | - | 18 | - | 18 | - | 18 | | |
| I_{CC3} | NO OPERATING CURRENT ($t_{CK} = \text{min}$, $\overline{CS} = V_{IH}(\text{min})$ Bank: Active State (4 banks)) | CKE = V_{IH} | - | 1080 | - | 990 | - | 900 | mA | 3 |
| I_{CC3P} | | CKE = V_{IL} (Power-Down Mode) | - | 180 | - | 180 | - | 180 | | |
| I_{CC4} | BURST OPERATING CURRENT ($t_{CK} = \text{min}$, $\overline{CS} = V_{IH}(\text{min})$, Read/Write Command Cycling) | | - | 1260 | - | 1170 | - | 1080 | mA | 3, 4, 5 |
| I_{CC5} | AUTO-REFRESH CURRENT ($t_{CK} = \text{min}$, $t_{RC} = \text{min}$, Auto-Refresh Command Cycling) | | - | 3060 | - | 2880 | - | 2700 | mA | 3 |
| I_{CC6} | SELF-REFRESH CURRENT (Self-Refresh Mode, CKE = 0.2 V) | | - | 54 | - | 54 | - | 54 | mA | 3 |
| $I_{I(L)}$ | INPUT LEAKAGE CURRENT ($0\text{ V} \leq V_{IN} \leq V_{DD}$, All Other Pins Not under Test = 0 V) | | -5 | 5 | -5 | 5 | -5 | 5 | μA | |
| $I_{O(L)}$ | OUTPUT LEAKAGE CURRENT (D_{OUT} Is Disabled, $0\text{ V} \leq V_{OUT} \leq V_{DD}$) | | -5 | 5 | -5 | 5 | -5 | 5 | μA | |
| V_{OH} | OUTPUT LEVEL LVTTTL Output H-Level Voltage ($I_{OUT} = -2\text{ mA}$) | | 2.4 | - | 2.4 | - | 2.4 | - | V | |
| V_{OL} | OUTPUT LEVEL LVTTTL Output L-Level Voltage ($I_{OUT} = 2\text{ mA}$) | | - | 0.4 | - | 0.4 | - | 0.4 | V | |

AC CHARACTERISTICS AND OPERATING CONDITIONS

($V_{DD} = 3.3\text{ V} \pm 0.3\text{ V}$, $T_a = 0^\circ \sim 70^\circ\text{C}$) (Notes 6, 7, 11)

| SYMBOL | PARAMETER | 70 | | 75 | | 80 | | UNIT | NOTES | | |
|-----------|--|---------|--------|------|--------|------|--------|--------|-------|------|---|
| | | MIN | MAX | MIN | MAX | MIN | MAX | | | | |
| t_{RC} | Ref/Active-Ref/Active Command Period | 56 | | 65 | | 68 | | ns | 8 | | |
| t_{RAS} | Active-Precharge Command Period | 40 | 100000 | 45 | 100000 | 48 | 100000 | | | | |
| t_{RCD} | Active-Read/Write Command Delay Time | 15 | | 20 | | 20 | | | | | |
| t_{CCD} | Read/Write(a)-Read/Write(b) Command Period | 1 | | 1 | | 1 | | cycles | | | |
| t_{RP} | Precharge-Active Command Period | 15 | | 20 | | 20 | | ns | | | |
| t_{RRD} | Active(a)-Active(b) Command Period | 15 | | 15 | | 20 | | | | | |
| t_{WR} | Write Recovery Time | CL* = 2 | 7.5 | 10 | | 10 | | | | | |
| | | CL* = 3 | 7 | 7.5 | | 8 | | | | | |
| t_{CK} | CLK Cycle Time | CL* = 2 | 7.5 | 1000 | 10 | 1000 | 10 | | | 1000 | |
| | | CL* = 3 | 7 | 1000 | 7.5 | 1000 | 8 | | | 1000 | |
| t_{CH} | CLK High-Level Width | 2.5 | | 2.5 | | 3 | | | | 9 | |
| t_{CL} | CLK Low-Level Width | 2.5 | | 2.5 | | 3 | | | | | |
| t_{AC} | Access Time from CLK | CL* = 2 | | 5.4 | | 6 | | | | 6 | |
| | | CL* = 3 | | 5.4 | | 5.4 | | | | 6 | |
| t_{OH} | Output Data Hold Time | 3 | | 3 | | 3 | | | | ns | 7 |
| t_{HZ} | Output Data High-Impedance Time | 3 | 7 | 3 | 7.5 | 3 | 8 | | | | |
| t_{LZ} | Output Data Low-Impedance Time | 0 | | 0 | | 0 | | | | | |
| t_{SB} | Power-Down Mode Entry Time | 0 | 7 | 0 | 7.5 | 0 | 8 | | | | |
| t_T | Transition Time of CLK (Rise and Fall) | 0.5 | 10 | 0.5 | 10 | 0.5 | 10 | | | | |
| t_{DS} | Data-In Set-up Time | 1.5 | | 1.5 | | 2 | | | | | |
| t_{DH} | Data-In Hold Time | 0.8 | | 0.8 | | 1 | | | | | |
| t_{AS} | Address Set-up Time | 1.5 | | 1.5 | | 2 | | | | | |
| t_{AH} | Address Hold Time | 0.8 | | 0.8 | | 1 | | | | | |
| t_{CKS} | CKE Set-up Time | 1.5 | | 1.5 | | 2 | | | | | |
| t_{CKH} | CKE Hold Time | 0.8 | | 0.8 | | 1 | | | | | |
| t_{CMS} | Command Set-up Time | 1.5 | | 1.5 | | 2 | | | | | |
| t_{CMH} | Command Hold Time | 0.8 | | 0.8 | | 1 | | | | | |
| t_{REF} | Refresh Time | | 64 | | 64 | | 64 | ms | | | |
| t_{RSC} | Mode Register Set Cycle Time | 14 | | 15 | | 16 | | ns | 8 | | |



* CL is \overline{CAS} latency.

NOTES:

1. Conditions outside the limits listed under Absolute Maximum Ratings may cause permanent damage to the device.
2. All voltages are referenced to Vss.
3. These parameters depend on the cycle rate and their values are measured at the cycle rate obtained using the minimum values of t_{CK} and t_{RC} . Input signals are changed once during t_{CK} .
4. These parameters depend on the output loading. The specified values are obtained with the output open.
5. These values are measured under the following conditions.
 Front (or back): Under the measuring conditions given on the data sheet
 Back (or front): In standby (measured under the I_{CC2} conditions)

6. AC TEST CONDITIONS

| | |
|--|--|
| Reference Level for Output Signals | 1.4 V/1.4 V |
| Output Load | See the diagram for AC Test Load (B) below |
| Input Signal Levels | 2.4 V/0.4 V |
| Transition Time (Rise and Fall) of Input Signals | 2 ns |
| Reference Level of Input Signals | 1.4 V |

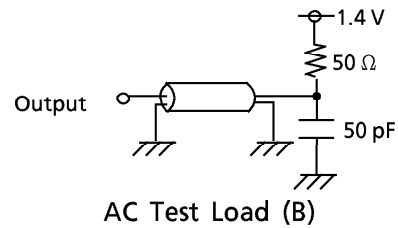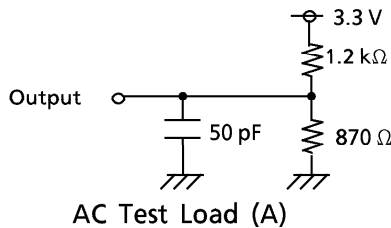

7. Transition times are measured between the V_{IH} and V_{IL} levels. The transition (rise and fall) of input signals has a fixed slope.
8. t_{HZ} defines the time at which the outputs go open-circuit and are not reference levels.

9. These parameters are specified for a given number of clock cycles and a given operating frequency. The relationship between the number of clock cycles, the timing value and the frequency (a clock period) is as follows:

$$\text{number of clock cycles} = \text{specified timing value} / \text{clock period}$$

(Fractions are rounded up to a whole number.)

10. t_{CH} is the pulse width of CLK measured from the positive edge to the negative edge and referenced to V_{IH} (min). t_{CL} is the pulse width of CLK measured from the negative edge to the positive edge and referenced to V_{IL} (max).

11. Power-up Sequence


Power-up must be performed in the following sequence.

- 1) Power must be applied to V_{DD} with all input signals held in the NOP state. The CLK signal must be started at the same time as power is applied.
- 2) After power-up a pause of at least 200 μ seconds is required. Then, DQMB and CKE must be held High (at the V_{DD} level) to ensure that the DQ and CB outputs are High-Impedance.
- 3) Both banks must be precharged.
- 4) The Mode Register Set command must be asserted to initialize the Mode Register.
- 5) An Auto-Refresh operation, consisting of at least eight Auto-Refresh cycles, must be performed.


The order in which 4) and 5) are performed is interchangeable.

TIMING DIAGRAMS

READ TIMING

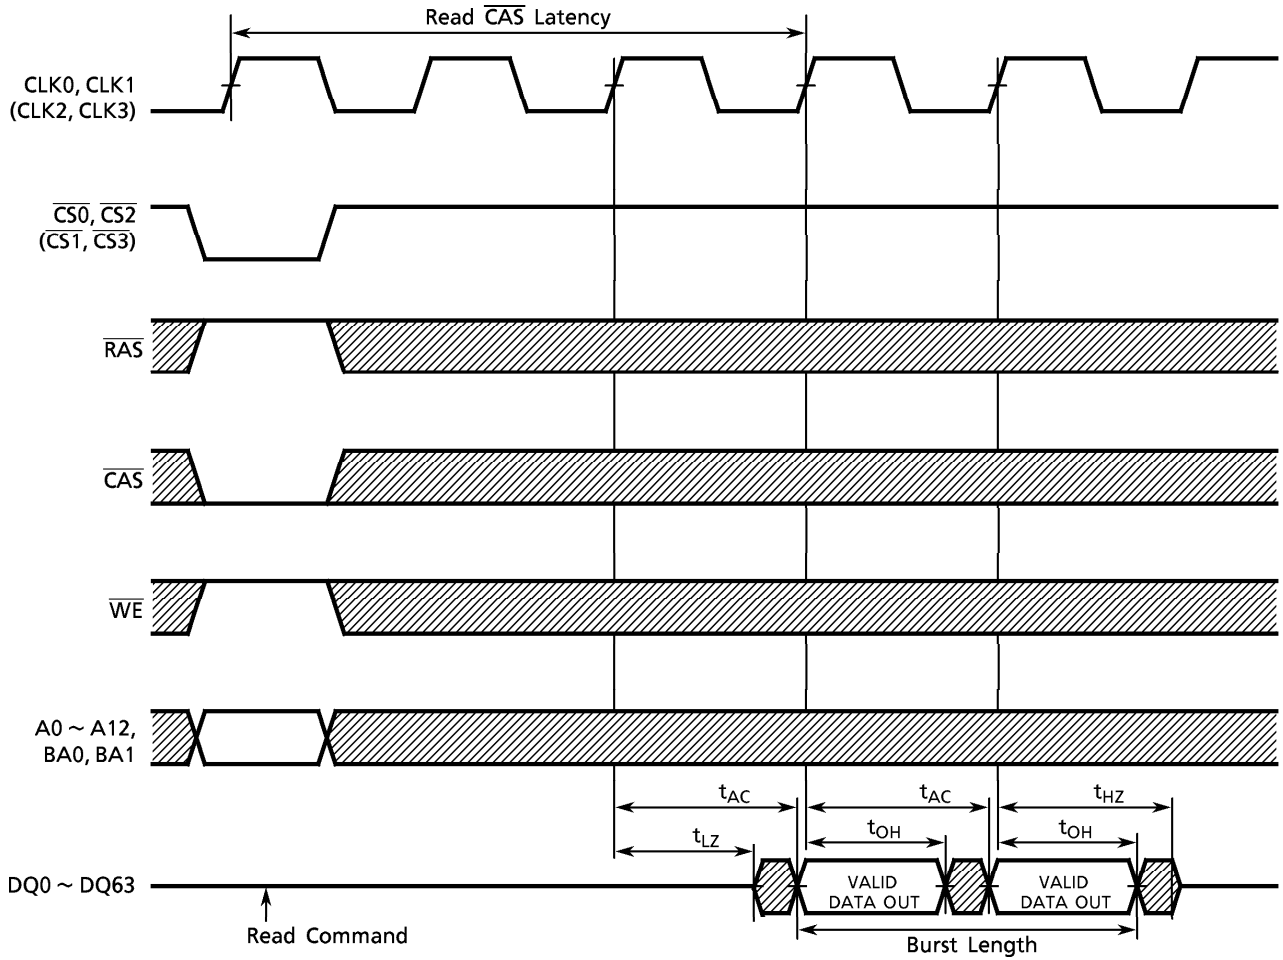


COMMAND INPUT TIMING

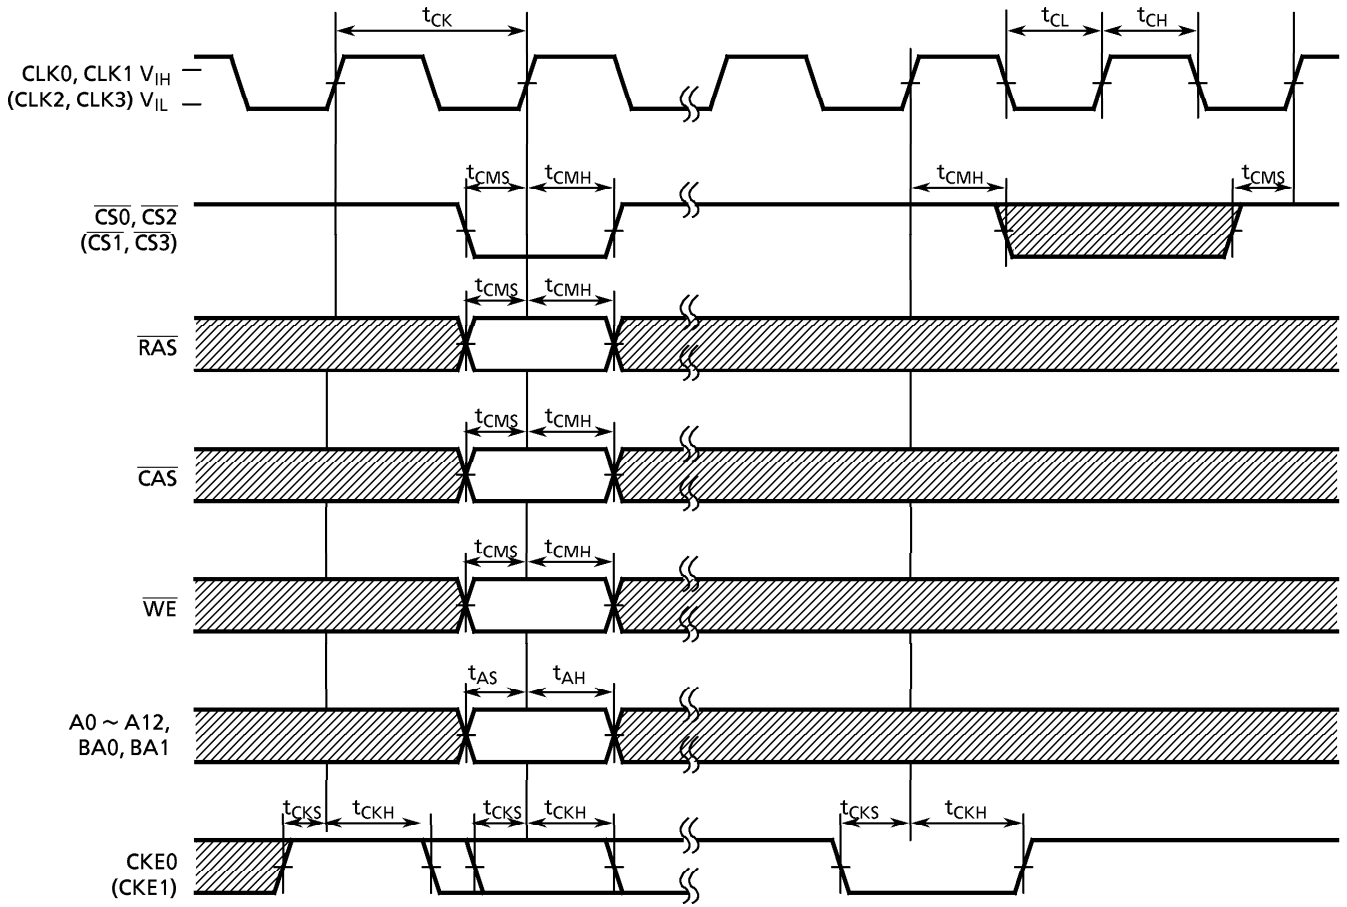


CONTROL TIMING FOR INPUT DATA

(Word Mask)

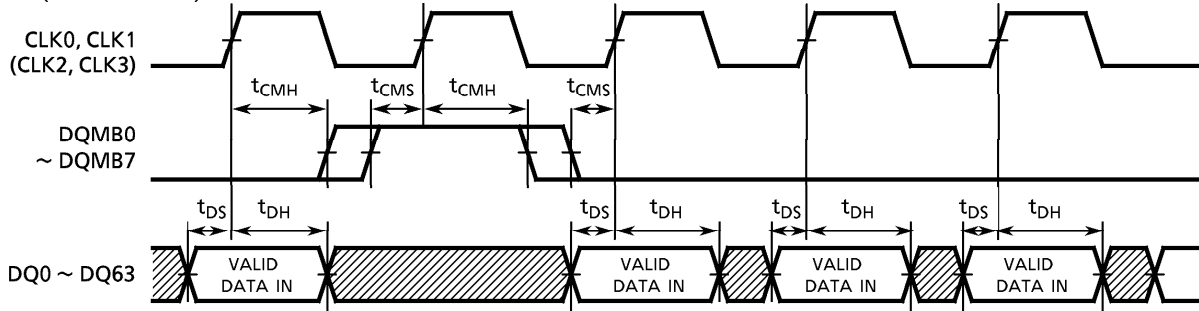


(Clock Mask)

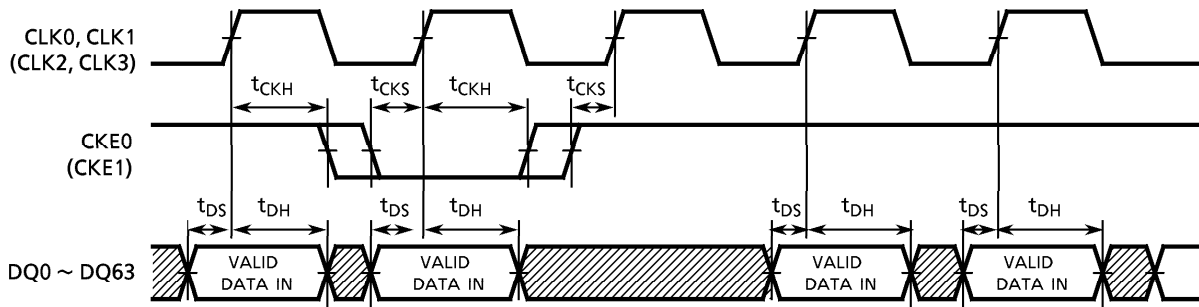


CONTROL TIMING FOR OUTPUT DATA


(Output Enable)

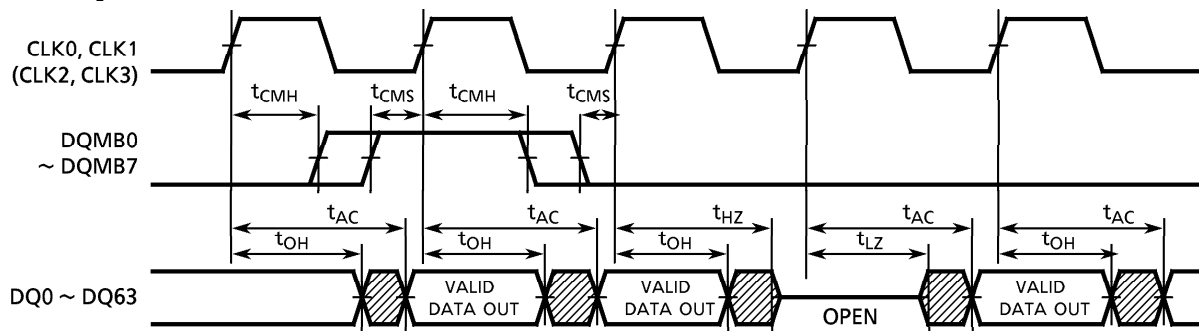

(Clock Mask)

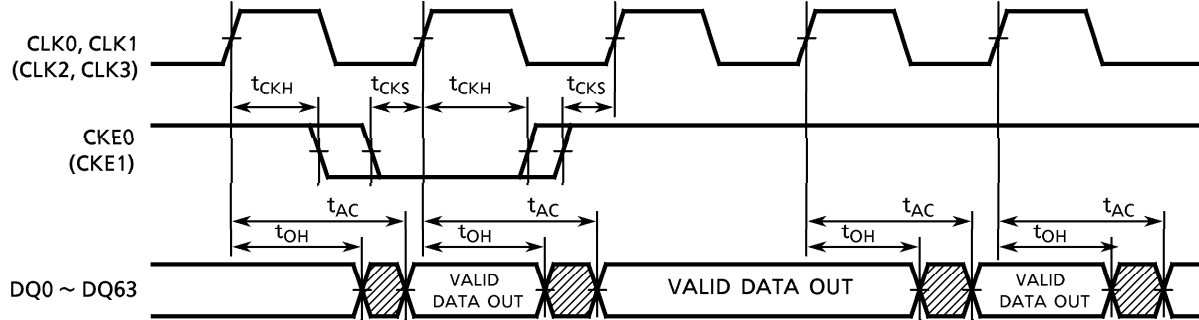

MODE REGISTER SET CYCLE

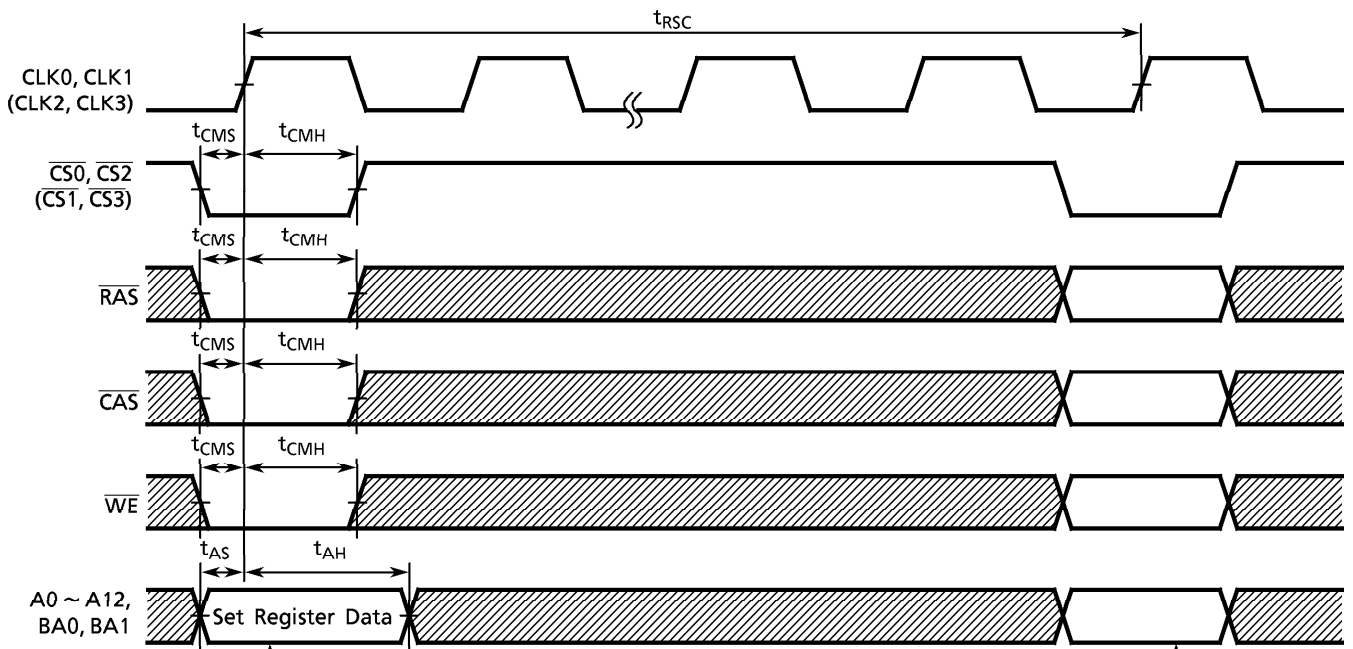

| | | |
|-----|-----------------|-------------|
| A0 | Burst Length | |
| A1 | Burst Length | |
| A2 | Burst Length | |
| A3 | Addressing Mode | |
| A4 | CAS Latency | |
| A5 | CAS Latency | |
| A6 | CAS Latency | |
| A7 | 0 | (Test Mode) |
| A8 | 0 | Reserved |
| A9 | Write Mode | |
| A10 | 0 | Reserved |
| A11 | 0 | |
| A12 | 0 | |
| BA0 | 0 | Reserved |
| BA1 | 0 | |

| | | | Burst Length | |
|----|----|----|--------------|-------------|
| A2 | A1 | A0 | Sequential | Interleaved |
| 0 | 0 | 0 | 1 | 1 |
| 0 | 0 | 1 | 2 | 2 |
| 0 | 1 | 0 | 4 | 4 |
| 0 | 1 | 1 | 8 | 8 |
| 1 | 0 | 0 | Reserved | Reserved |
| 1 | 0 | 1 | | |
| 1 | 1 | 0 | Full Page | Reserved |
| 1 | 1 | 1 | | |

| A3 | Addressing Mode |
|----|-----------------|
| 0 | Sequential |
| 1 | Interleaved |


| A6 | A5 | A4 | CAS Latency |
|----|----|----|-------------|
| 0 | 0 | 0 | Reserved |
| 0 | 0 | 1 | Reserved |
| 0 | 1 | 0 | 2 |
| 0 | 1 | 1 | 3 |
| 1 | 0 | 0 | 4 |

| A9 | Single Write Mode |
|----|-----------------------------|
| 0 | Burst Read and Burst Write |
| 1 | Burst Read and Single Write |

Next Command

PACKAGE DIMENSIONS (THMY51E01B)

Unit: mm

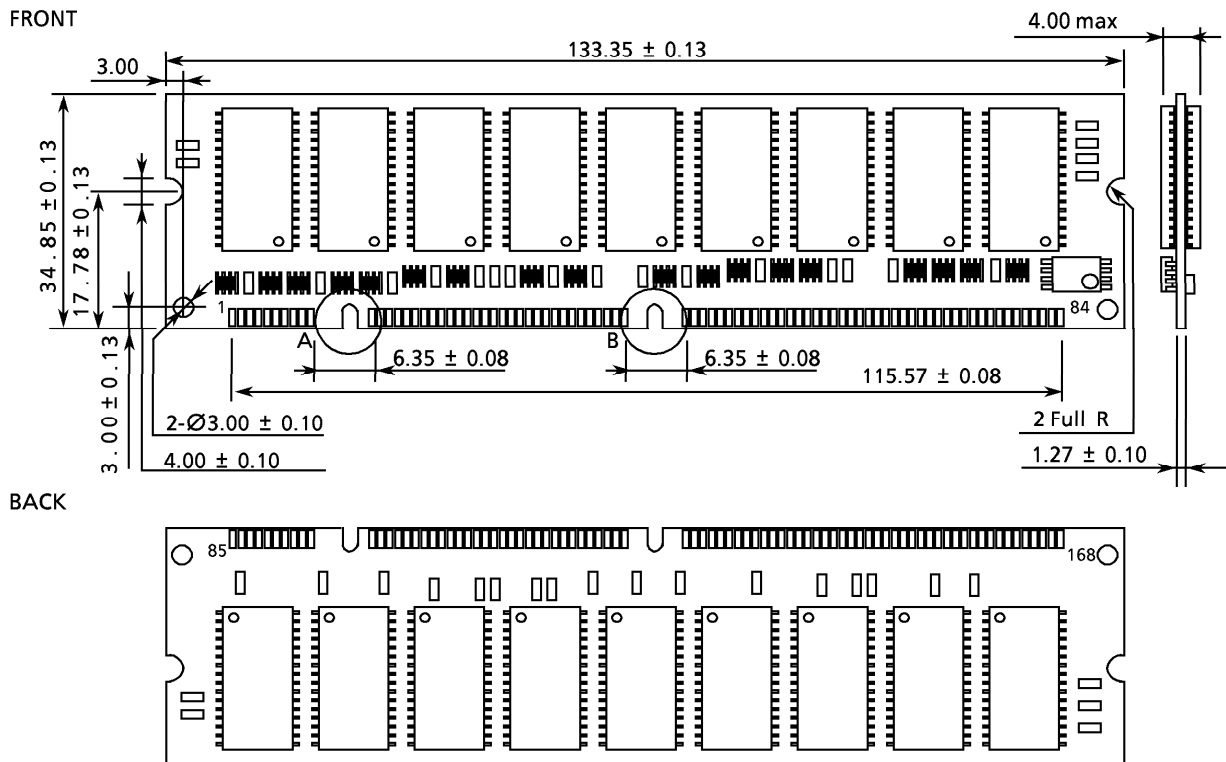

CONTACT DIMENSIONS

A: Unbuffered keying

B: 3.3-V keying

