





## NOTES:

- ROHS COMPLIANT
- HEADER: PHENOLIC WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
- 3. STORAGE TEMPERATURE: -20°C TO +125°C
- 4. COMPLIANCE TO J-STD:
  - A. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
  - B. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
  - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
- 5. TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX

  TO THE PART NUMBER(i.e PE-65848FNL BECOMES PE-65848FNLT).








FINAL OUTLINE

@ Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/30/14)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
XFMR,SGL,ECH,LA,1.25MB,NL	PE-65848FNL-10	PS-2752.001-B	1 OF 3	PE-65848FNL	A







## ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED


PARAMETER	SPECIFICATIONS				
OPERATING TEMP	0°C - 70 °C				
POLARITY	PER SCHEMATIC				
TURNS RATIO @10 KHZ, 0.2 VRMS	$\frac{(1-2)}{(3-4)} = \frac{(1-2)}{(8-7)} = \frac{(8-7)}{(6-5)} = 1 \pm 2\%$				
PRIMARY INDUCTANCE: @.10 VRMS, 100 KHZ	(8-5) WITH $(7-6)$ SHORTED = 3.5 mH MINIMUM, 6.5 mH MAXIMUM $(8-5)$ WITH $(7-6)$ SHORTED = 3.0 mH MINIMUM AT 0°C				
LEAKAGE INDUCTANCE (LL) @.02 VRMS, 100 KHZ	(8-5) WITH $(7-6)$ , $(1-4)$ , $(2-3)$ SHORTED = .80 uH MAXIMUM				
CWW @.02 mVRMS, 100 KHZ	(1-4) TO $(8-5)$ WITH $(2-3)$ , $(7-6)$ SHORTED = 40 pF MAXIMUM				
DCR:	0.50 OHMS MAXIMUM				
DISTRIBUTED CAPACITANCE: @.02 VRMS, 3 MHZ	(8-5) WITH (7-6) SHORTED = 11 pF MAXIMUM				
OHER	1 MHZ	8 MHZ			
CMRR	-40 dB MINIMUM	-26 dB MINIMUM			
HIPOT:	1500 VRMS FOR 60 SECONDS				


@ Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/30/14)


PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
XFMR,SGL,ECH,LA,1.25MB,NL	PE-65848FNL-10	PS-2752.001-B	2 OF 3	PE-65848FNL	А






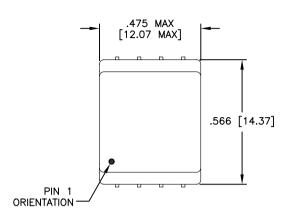

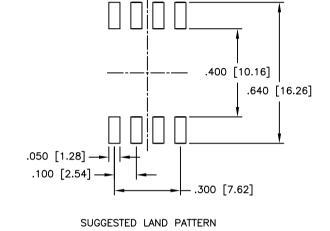

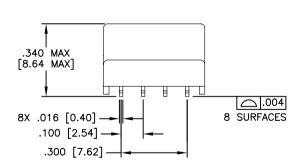

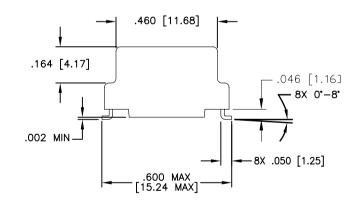

DIMENSIONS ARE IN INCHES [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETERS] ARE FOR REFERENCE ONLY. .XX=  $\pm .01$  [ $\pm 0.25$ ] .XXX=  $\pm .005$  [ $\pm 0.13$ ]

@ Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/30/14)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
XFMR,SGL,ECH,LA,1.25MB,NL	PE-65848FNL-10	PS-2752.001-B	3 OF 3	PE-65848FNL	Α

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Pulse:

PE-65848FNL PE-65848FNLT