



QEN05

SMD 5x3.2 XO – Communications Equipment Application
Specification (Rev-C)

■ Electrical Characteristics	P01
■ Mechanical Characteristics	P02
■ Ordering Information	P03
■ Suggested Reflow Soldering profile	P03
■ Tape Drawing.....	P04
■ Reel Drawing	P04

QEN05

SMD 5x3.2 XO – Communications Equipment Application

Specification (rev-C)

December 15th, 2005

Electrical Characteristics

Electrical Parameters	Unit	Minimum	Typical	Maximum	Test conditions
Frequency range (see note 1)	MHz	1.544		125	
Output logic	HCMOS / TTL Output				
Operating temperature range (see table 1)	°C		-10 to +70	-40 to +85	Refer to Ordering Information
Storage temperature range	°C	-55		+125	
Power supply voltage (Vcc)	V	+1.8		+5.0	Refer to Ordering Information
Frequency Stability (see note 2)	± ppm	25	50	100	Refer to Ordering Information
Aging (First Year)	± ppm			5	Ref at 25°C
Input current (see table 2)	mA				
Output load	pF	15		30	Refer to Ordering Information
Duty cycle (see note 3)	%		40/60		Refer to Ordering Information
Rise & Fall time	ns			7	From 10% Vcc to 90% Vcc
Start-up time	ms			10	From 10% Vcc to 90% Vcc

Note 1: Not all voltages, loads or stabilities are available for frequency over 70 MHz.

Note 2: Include 25°C tolerance, operating temperature range, input voltage change, load change, first year aging, shock and vibration.

Note 3: Duty cycle 45/55% is available on option.

Table 1 : Stability Codes

	± 25ppm	± 50ppm	± 100ppm
-10 to +70°C	C	B	A
- 40 to +85°C	G	F	D

Table 2 : Input Current

Frequency range (MHz)	Vcc=5V Cl=15 pF	Vcc=3.3V Cl=15pF	Vcc=2.5V Cl=15pF	Vcc=1.8V Cl=15pF
1.544 to 9.999	15 mA	8 mA	7 mA	6 mA
10.00 to 34.999	20 mA	10 mA	8 mA	7 mA
35.00 to 49.999	35 mA	25 mA	20 mA	15 mA
50.00 to 125	40 mA	35 mA	30 mA	25 mA



QEN05

SMD 5x3.2 XO – Communications Equipment Application
Specification (rev-C)

December 15th, 2005


- Mechanical Characteristics

SUGGESTED PAD

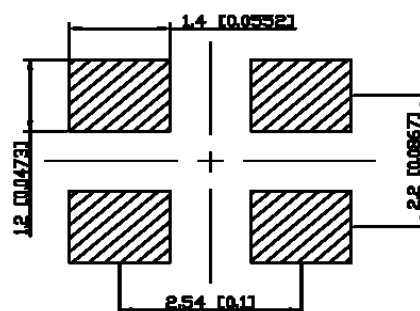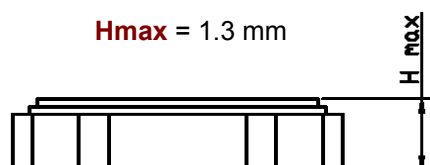

TOP VIEW

BOTTOM VIEW

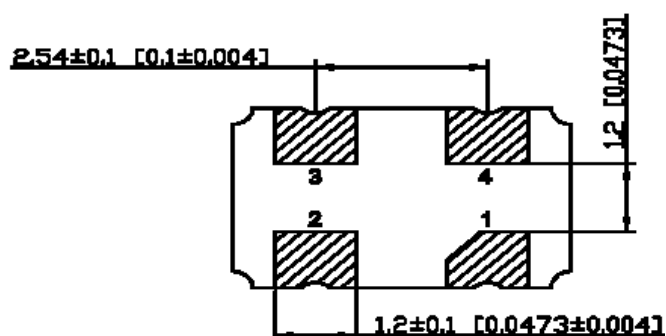

Pin connections	
	Tri state
#2	Ground
#3	Output
#4	+Vcc

Tri state function	
Pin #1	Output (Pin #3)
Open	Active
"1"	Active
"0"	High Z

Marking	
Line 1	Manufacturing code + 05 + stability/supply voltage/output code
Line 2	Frequency in MHz (6 digits)

Example for QEN05BDA / 50MHz

- ⇒ Line 1 : G05BDA
- ⇒ Line 2 : 50.000

QEN05

SMD 5x3.2 XO – Communications Equipment Application


Specification (rev-C)

December 15th, 2005

Ordering Information

Part numbering system					
QEN05	B	D	A	R	50.000MHZ
↓	↓	↓	↓	↓	↓
Package type	Temperature Stability	Supply Voltage	Output	Output Symmetry Option	Nominal Frequency (MHz)
SMD Package QEN05 : SMD 5x3.2	A : ± 100ppm vs -10 to +70°C B : ± 50ppm vs -10 to +70°C C : ± 25ppm vs -10 to +70°C D : ± 100ppm vs -40 to +85°C F : ± 50ppm vs -40 to +85°C G : ± 25ppm vs -40 to +85°C	A : + 5.0V D : +3.3V M : +2.5V N : +1.8V	A : HCMOS 15pF B : HCMOS 30pF	Blank : 40/60% R : 45/55%	Please enter the nominal frequency

Suggested Reflow Soldering Profile

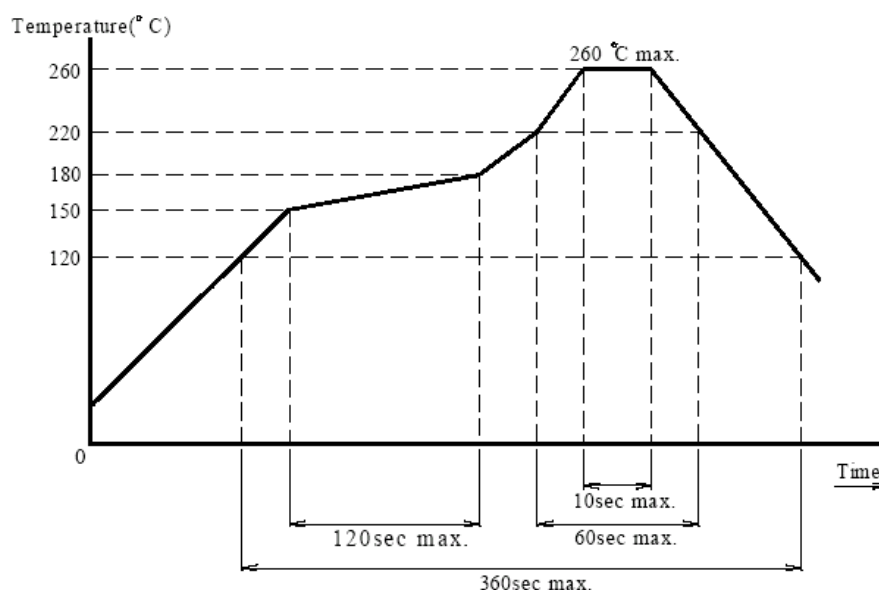


QEN05

SMD 5x3.2 XO – Communications Equipment Application
Specification (rev-C)


December 15th, 2005

■ Tape Drawing

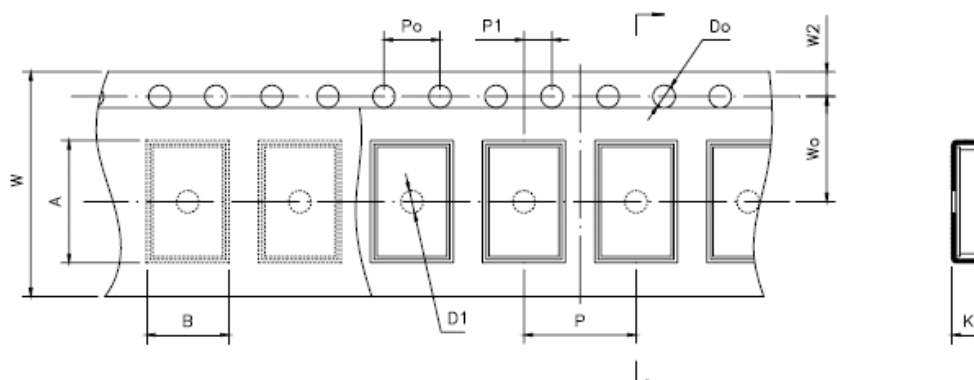

Item	Code	Dimension	Tolerance
Pitch of components	P	8.0	± 0.1
Pitch of sprocket hole	Po	4.0	± 0.1
Length from hole center to component center	P1	2.0	± 0.1
Width of carrier tape	W	12.0	± 0.3
Width of adhesive tape	W0	5.5	± 0.1
Height of component hole	A	5.7	± 0.1
Diameter of sprocket hole	Do	Ø 1.5	± 0.1
Total of tape thickness	K	1.5	± 0.1

■ Reel Drawing

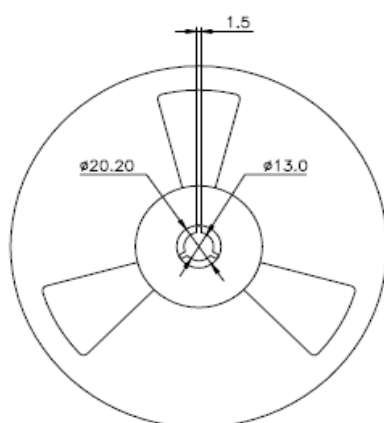

Multiple : 1Kpcs per Reel

Unit : mm

