REV.	DESCRIPTION	CHANGE. BY	APPVL. BY	DATE
A	RELEASE	Jin	Frank	2/08/07"
B	變更NOTE	Jin	Frank	8/27/07"
C				

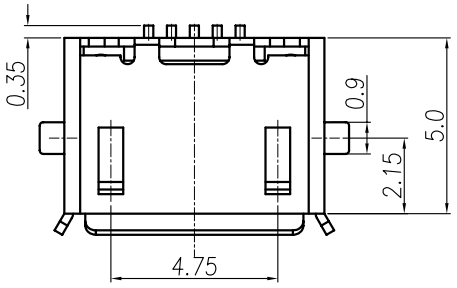



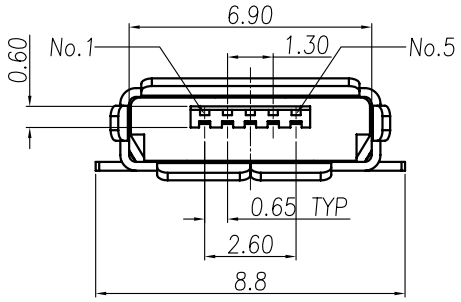



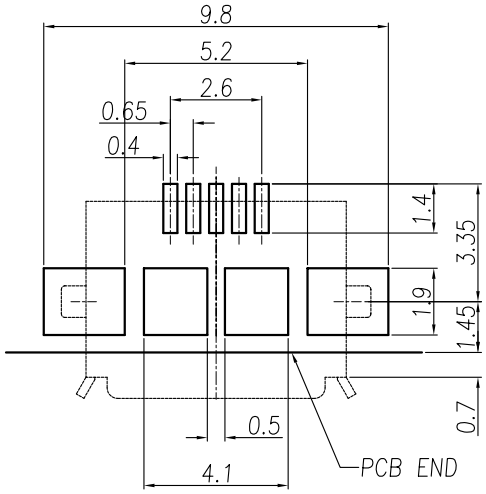

RECOMMEND P.C.B LAYOUT

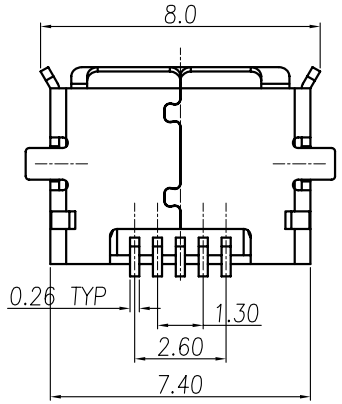

NOTE:

1.ELECRTICAL PROPERTIES:

1-1.CONTACT CURRENT RATING:1.8A(ONLY PIN1,5) AT THE SAME TIME
0.5A AT CONTACT PIN 2,3,4 OTHER 1A(ONLY PIN2,3 4).

1-2.CONTACT RESISTANCE:30m Ohm MAX

1-3.INSULATION RESISTANCE:100M Ohm MIN AT DC 500V.

1-4.DIELECTRIC WITHSTANDING VOLTAGE:AC 100V AC/1 MINUTE 10mA.

2.MATERIAL:

2-1.PIN:PHOSPHOR BRONZE.

2-2.HOUSING:LCP.

B 2-3.SHELL:STAINESS #304.

B 3.PLATING:SEE TABLE A.

TABLE A

No.	P/N	PLATED
1	MU-05F4-15	PIN:Gold 10u"Min on contact area, underplate Nickel over all 60u" Min. Shell:Matted Tin 60u" Min over all.
2	MU-05F4-22	PIN:Gold 10u"Min on contact area, underplate Nickel over all 60u" Min. Shell:Nickel 60u" Min over all.

繪圖 DRAW. BY	Jin	日期 DATE	2/08/07""	單位 UNIT	mm	一般公差 .x ±0.25 .xx ±0.10		品名 ITEM	MICRO USB 5P(F) AB TYPE			SHEET 1/1
核準 APPVL. BY	Frank	版本 VERSION	B	比例 SCALE	1:1		奧柏科技	料號 PART NO.	SEE TABLE A	圖號 DWG NO.	QC2408	SIZE A4