


1 2 3 4 5 6

PRODUCT NUMBER  
SEE TABLE

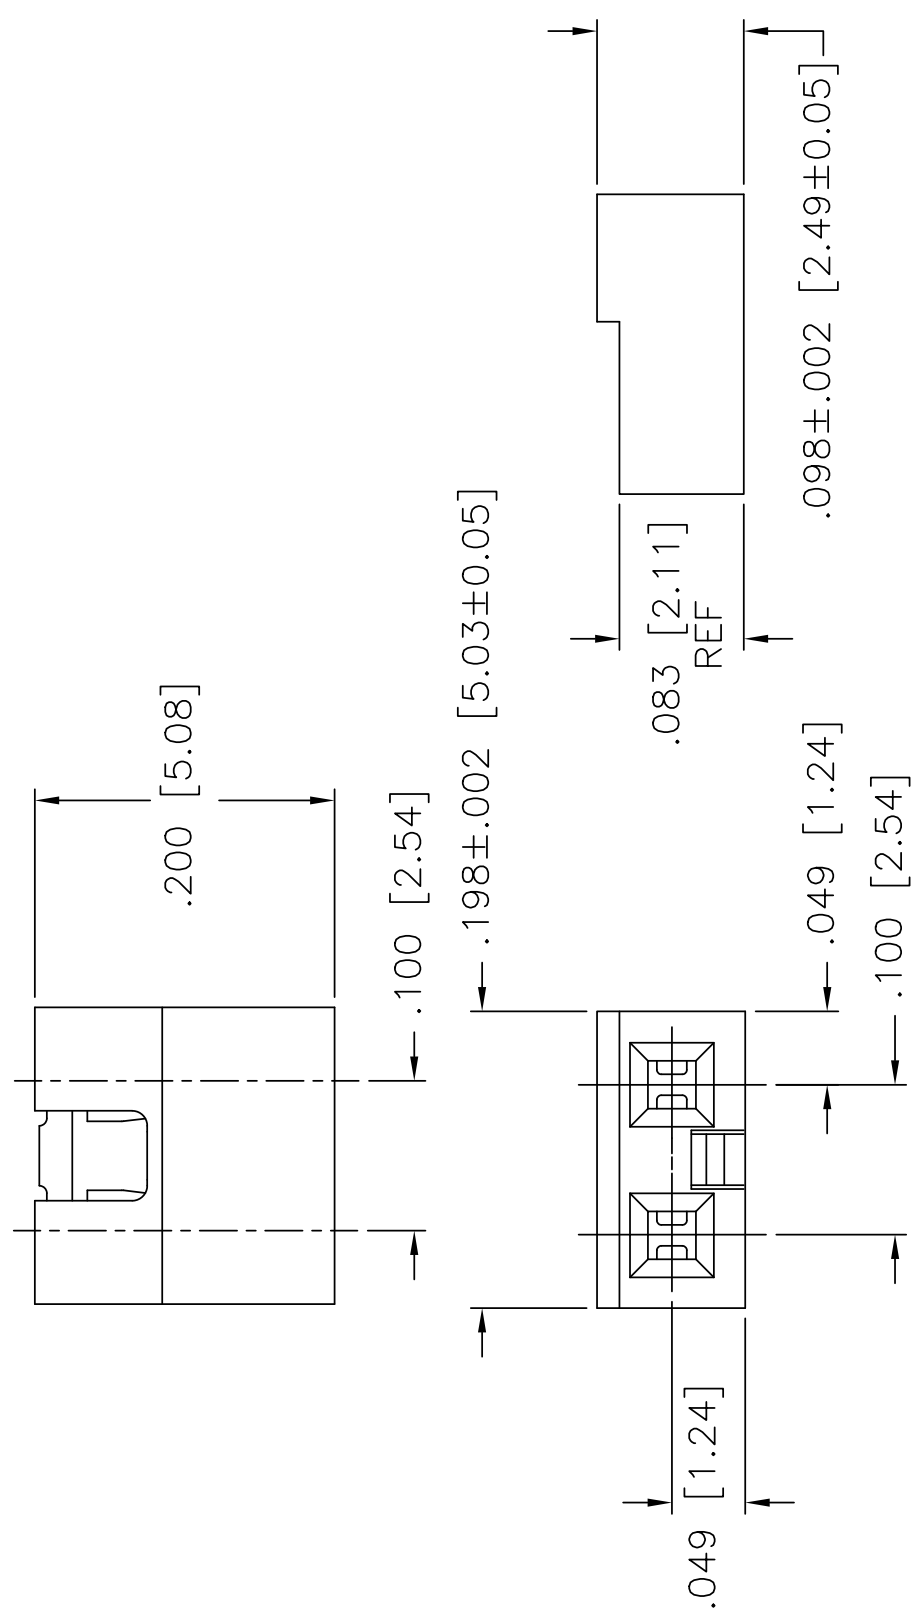

mat'l. code		surface / tolerance		projection		product family	
ISO 1302		ISO 101		FIRST ANGLE		JUMPER	
tolerances unless otherwise specified		line		INCH/MM		title	
angles		XXX.XXX/XXX.XXX		scale 1:1		1X2 LOW PROFILE JUMPER ASSEMBLY	
date		R.EBY		10/07/87		dwg no	
2012-05-04		M.HAHN		10/07/87		68786	
sheet 1		M.HAHN		10/07/87		type	
sheet 2		M.HAHN		10/07/87		Product Customer Drawing	
index		S		FCJ		sheet of 2	
sheet 1		S		1:1		A3	
sheet 2		S		1:1		Product Customer Drawing	

PRODUCT No.	CONTACT PLATING	HSG COLOR	LEAD FREE
68786-102	15u"/.38u Au OR GXT OVER 50u"/1.27u Ni	WHITE	
-202	30u"/.76u Au OR GXT OVER 50u"/1.27u Ni	WHITE	
-302	100u"/2.54u Sn	WHITE	
-402	Au FLASH OVER 50u"/1.27u Ni	BLACK	
-103	15u"/.38u Au OR GXT	BLUE	NOTE 4
-203	30u"/.76u Au OR GXT	BLUE	
-303	100u"/2.54u Sn	BLUE	
-403	Au FLASH OVER 50u"/1.27u Ni	BLUE	
-802	<del>SAME AS -202 EXCEPT ADD SPECIAL MIL MARKING</del>		
68786-204	30u"/.76u Au OR GXT OVER 50u"/1.27u Ni	YELLOW	
68786-304	100u"/2.54u Sn	YELLOW	

OBSOLETE

OBSOLETE  
OBSOLETE

NOTES:

- 1 MATERIAL: POLYESTER, FLAME RETARDANT PER UL-94-V0 .
2. RECOMMENDED APPLICATION DATA:
  - A. ALL MATING PINS TO BE .025/.64 SQ ON TRUE CENTERS OF GIVEN TERMINAL SPACING WITHIN .015/.38 DIA .
  - B. SUGGESTED MATING PIN LENGTH .160/4.06 MIN .
3. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
5. THIS PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.
6. PRODUCT SPECIFICATION: BUS-12-071.

mat'l. code	surface / tolerance	projection	product family
ISD 1302	ISO 406 / ISO 1101	1st angle	JUMPER
tolerances unless otherwise specified	linea	INCH/MM	title
angles	0°±2'	scale 1:1	1X2 LOW PROFILE JUMPER ASSEMBLY
dr	R.EBY 10/07/87	dwg no	68786
engr	M.HAHN 10/07/87	sheet	2 of 2
chr	M.HAHN 10/07/87	type	Product Customer Drawing
appd	M.HAHN 10/07/87	size	A3
sheet index			
revision			
sheet			