




9-5288122-2 Product Details

Share | Print | Email

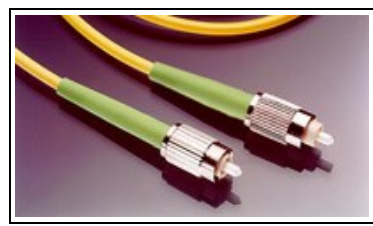

9-5288122-2

Fiber Optic Cable Assemblies

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Single Fiber
- Cable Assembly
- FC Fiber Optic Cable Connector Type
- Cable Assembly Type = FC to Pigtail
- Singlemode

[View all Features](#)

Quick Links

- ▶ Pricing & Availability
- ▶ Search for Tooling
- ▶ Product Feature Selector
- ▶ Contact Us About This Product

TE Internal Number: 9-5288122-2

Active

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

<p>Product Drawings:</p> <ul style="list-style-type: none"> • None Available <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • None Available <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Related Products:</p> <ul style="list-style-type: none"> • Tooling
---	---

Feedback

Product Features (Please use the Product Drawing for all design activity)

<p>Product Type Features:</p> <ul style="list-style-type: none"> • Product Designation = Single Fiber • Product Type = Cable Assembly • Fiber Optic Cable Connector Type = FC • Cable Assembly Type = FC to Pigtail • Cable Type = Buffered Fiber • Coupling Nut Material = Brass <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Insertion Loss (dB) = 0.40 • Return Loss (dB) = 50 <p>Dimensions:</p> <ul style="list-style-type: none"> • Cable Diameter (mm [in]) = .9 [.035] • Length (M [ft]) = 2.50 [8.20] <p>Body Features:</p> <ul style="list-style-type: none"> • Cable Color = White • Boot Body Style - Left = Standard • Boot Color - Left = Blue • Ferrule Material = Ceramic 	<p>Contact Features:</p> <ul style="list-style-type: none"> • Fibre Channel = No <p>Configuration Features:</p> <ul style="list-style-type: none"> • Mode = Singlemode • Number of Fibers = 1 • Cable Buffering = Tight Buffered • Connector(s) Exit Angle to Connector(s) Exit Angle = 180° to Pigtail <p>Industry Standards:</p> <ul style="list-style-type: none"> • Flammability Rating Type = OFNR (Riser) Jacket • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Not relevant for lead free process • RoHS/ELV Compliance History = Always was RoHS compliant <p>Product Availability:</p> <ul style="list-style-type: none"> • Region = Asia, Latin America, North America <p>Other:</p> <ul style="list-style-type: none"> • Brand = TE Connectivity
--	---

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed



