
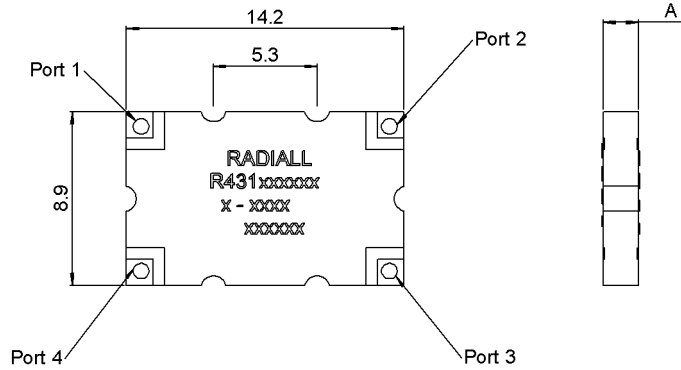


### DIRECTIONAL SMT COUPLERS POWER 60 W



Mean coupling (dB)	Part number	Packaging	Frequency (MHz)		VSWR max	IL (dB) (Exclud. coupling loss)	Frequency sensitivity (dB)	Directivity (dB)	A (mm)
6 +/- 1	R431 412 001	1000p reel	Specified band Extended band	1700 - 2000 1500 - 2200	≤ 1.20 ≤ 1.25	≤ 0.3 ≤ 0.3	+/- 0.2 +/- 0.3	≥ 20 ≥ 20	2.1
	R431 412 002	2000p reel							
	R431 412 005	100p reel							
	R431 412 005W	unit							
6 +/- 1.5	R431 612 001	1000p reel	Specified band Extended band	2000 - 2500 1800 - 2700	≤ 1.20 ≤ 1.25	≤ 0.3 ≤ 0.3	+/- 0.2 +/- 0.3	≥ 17 ≥ 17	2.1
	R431 612 002	2000p reel							
	R431 612 005	100p reel							
	R431 612 005W	unit							
10 +/- 1.5	R431 413 001	1000p reel	Specified band Extended band	1700 - 2000 1500 - 2200	≤ 1.18 ≤ 1.20	≤ 0.25 ≤ 0.25	+/- 0.2 +/- 0.3	≥ 20 ≥ 20	1.8
	R431 413 002	2000p reel							
	R431 413 005	100p reel							
	R431 413 005W	unit							
10 +/- 1.5	R431 613 001	1000p reel	Specified band Extended band	2000 - 2500 1800 - 2700	≤ 1.20 ≤ 1.25	≤ 0.3 ≤ 0.3	+/- 0.2 +/- 0.3	≥ 17 ≥ 17	1.8
	R431 613 002	2000p reel							
	R431 613 005	100p reel							
	R431 613 005W	unit							