Transformer for MAXREFDES116B#

CEFD2010B

Descriptions



- Isolated 24V to 5V 40W active clamp forward Power Supply
- 26.2× 22.0mm Max.(L× W), 10.8mmMax. Height.
- In addition to the typical versions of parameters shown here, custom parameters are available to meet your exact requirements.
- Max. Operating frequency 300kHz
- Max. Operating Power 19.0W (100kHz).
- Ideally used in PoE transformer.
- RoHS Compliance
- Sumida Type name ：CEFD2010B

Dimensions (mm [inch])

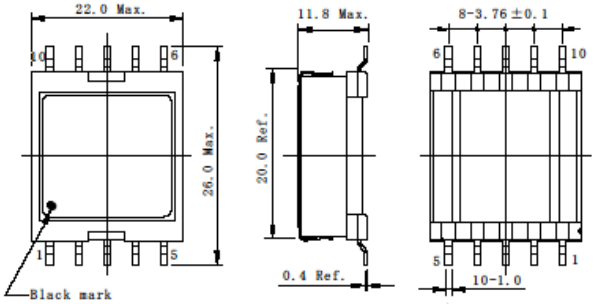

Land patterns (mm [inch])



Connections



Electrical characteristics

Part No.	Item	Inductance (5,4 - 2,1)	Withstanding voltage (1,2,4,5 – 6,7,9,10)
10387-T065	Specifications	30μH±45% within	AC 1,500Vrms 1minute
	Testing conditions	100kHz, 0.1V	50kHz/60Hz 1mA

For sales office information, please click here to visit our website.

Remarks： Sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text.