



2A H-Bridge Driver

Description

The CS-3720 is high current (2A typ) bidirectional DC motor driver. The H-bridge output stage consists of two pairs of power NPN transistors, each with a $V_{SAT}=2.3V$ at $I_{OUT}=2A$ (typ).

The three TTL compatible inputs, ENABLE1, ENABLE2, and DIRECTION control the output stage. When ENABLE1 is low and


ENABLE2 is high, DIRECTION determines which way current flows through the motor coil. Any other combination of ENABLE settings disables the outputs.

The CS-3720 is protected against overvoltage fault conditions. If a fault condition is detected, the IC shuts down.

Absolute Maximum Ratings

DC Input Voltage	-0.3 to 28V
Transient Input Voltage	-0.3 to 74V
Internal Power Dissipation.....	Internally limited
Operating Temperature Range	-40°C to +105°C
Junction Temperature Range	-40°C to +150°C
Storage Temperature Range.....	-65°C to +150°C
Lead Temperature Soldering	
Wave Solder (through hole styles only).....	10 sec. max, 260°C peak
Reflow (SMD styles only).....	60 sec. max above 183°C, 230°C peak
Electrostatic Discharge (Human Body Model).....	2kV

Block Diagram

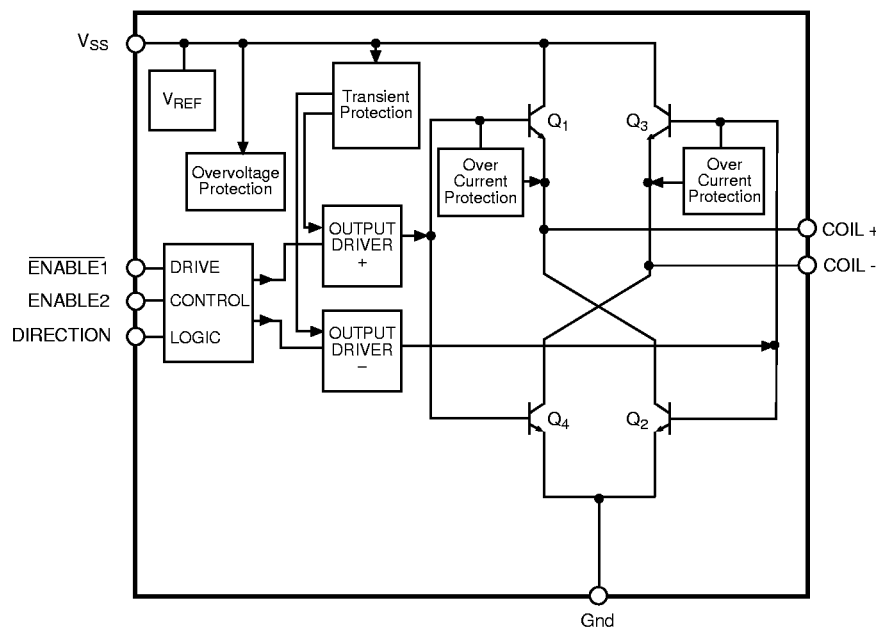


Features


- High Current (2A typ) Output
- TTL compatible DIRECTION Control
- Fault Protection
 - Overvoltage
 - Load Dump Protection to 74V

Package Options


7 Lead Power SIP

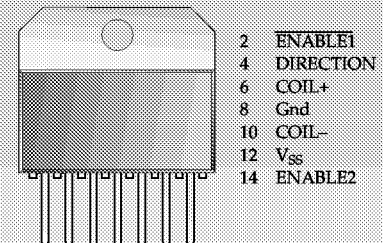

7 Lead TO-220



7 Lead D²PAK



- 1 ENABLE1
- 2 DIRECTION
- 3 COIL+
- 4 Gnd
- 5 Vss
- 6 COIL-
- 7 ENABLE2



PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
■ Output Stage					
Quiescent Current	$I_{OUT}=0mA$; ENABLE1=DIRECTION= High ENABLE2=Low			10	mA
Output Saturation Voltage	$I_{OUT}=2A$			3.2	V
	$I_{OUT}=500mA$			2.6	V
Output Leakage Current	$I_{OUT}=0mA$			20	μA
■ Logic Control Functions					
High Level Input Voltage		2.0			V
Low Level Input Voltage				0.8	V
High Level Input Current				10	μA
Low Level Input Current				-250	μA
Turn on Delay Guaranteed by design	$R_{LOAD}=30\Omega$; Coil=5mH; $C_{LOAD}=15pF$		5	50	μs
Turn off Delay Guaranteed by design	$R_{LOAD}=30\Omega$; Coil=5mH; $C_{LOAD}=15pF$		5	50	μ
■ Fault Protection Functions					
Overvoltage Shutdown	$I_{OUT} = 500mA$	18.0		21.5	V

Package Lead Description

PACKAGE LEAD:			LEAD SYMBOL	FUNCTION
15 Lead Power SIP	7 Lead TO-220	7 Lead D ² PAK		
2	1	1	ENABLE1	Enables output when held low and ENABLE 2 = High
4	2	2	DIRECTION	Determines the direction of current flow through COIL+ and COIL- as long as ENABLE1=Low and ENABLE2 = High
6	3	3	COIL+	Positive Output of H bridge to coil
8	4	4	Gnd	Ground connection
12	5	5	V _{SS}	Supply voltage for IC
10	6	6	COIL-	Negative Output of H bridge to coil
14	7	7	ENABLE2	Enables output when held high and ENABLE 1 = Low


Application Hints

Motor Direction Control

Current flow through the two outputs COIL+ and COIL- is controlled by the combined settings of ENABLE1, ENABLE2 and DIRECTION (Table 1). The outputs will be active only when ENABLE1 is low and ENABLE2 is high. When DIRECTION is high, current flows out of COIL+ and into COIL-. When DIRECTION is low, current flows out of COIL- and into COIL+. For any other combination of ENABLE settings, the outputs are off.


ENABLE1	ENABLE2	DIRECTION	COIL+	COIL-
Low	High	High	High	Low
Low	High	Low	Low	High
High	X	X	OFF	OFF
X	Low	X	OFF	OFF

Table 1. Logical Control Diagram

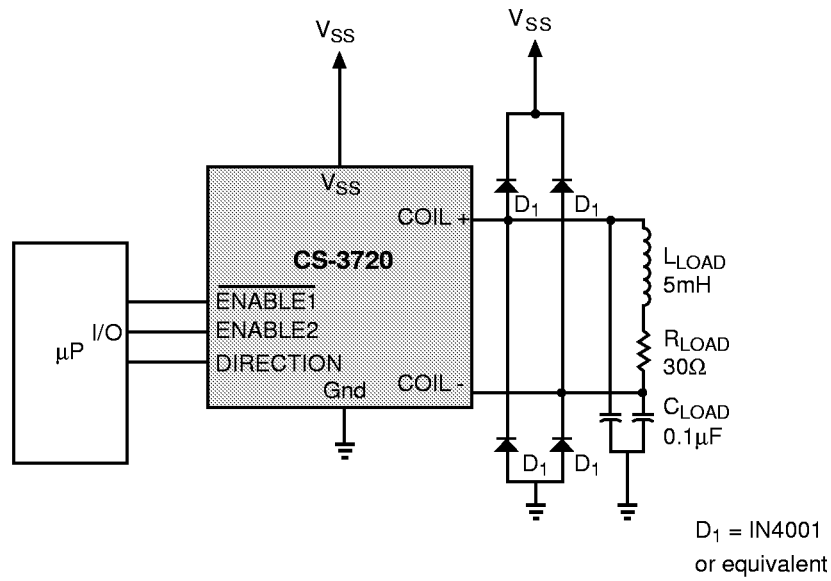

Note: A heat sink is required for 2A operation.

Figure 1. Delay Times for ENABLE and COIL

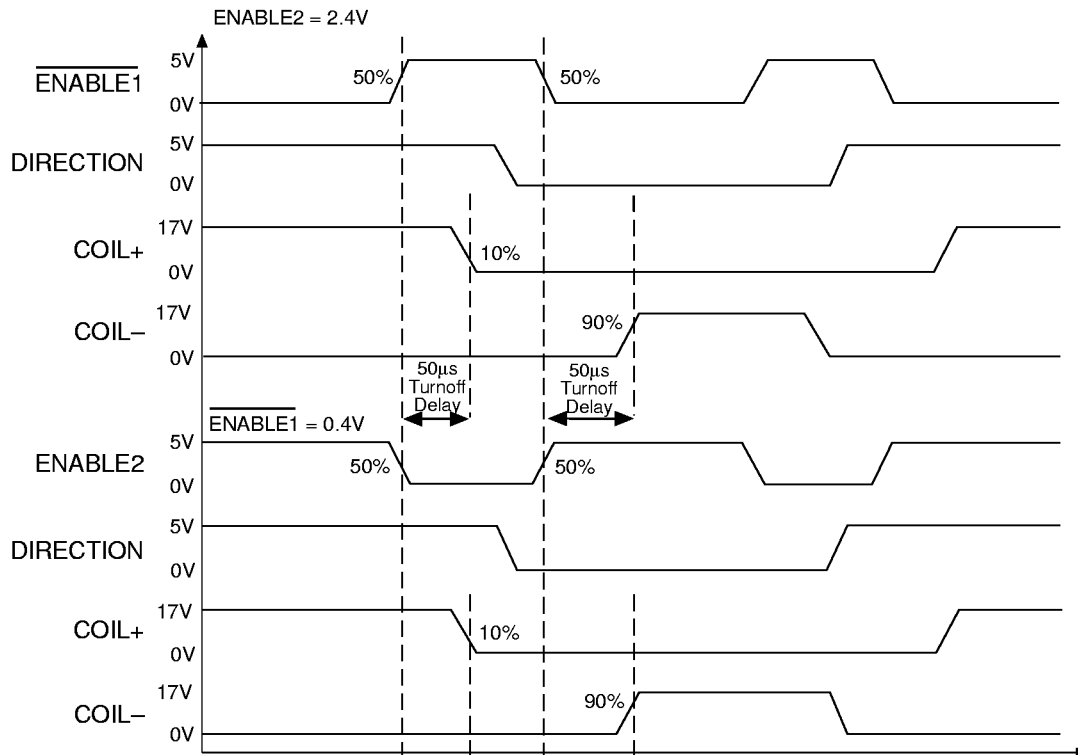



PACKAGE DIMENSIONS IN mm (INCHES)

PACKAGE THERMAL DATA


Thermal Data	typ	7L D ² PAK	7L TO-220	7L Power SIP	°C/W
		2.1	2.1	2.1	
R _{θJA}	typ	10-50*	50	35	°C/W

*Depending on thermal properties of substrate. $R_{\theta JA} = R_{\theta JC} + R_{\theta CA}$.

7 Lead TO-220 Straight

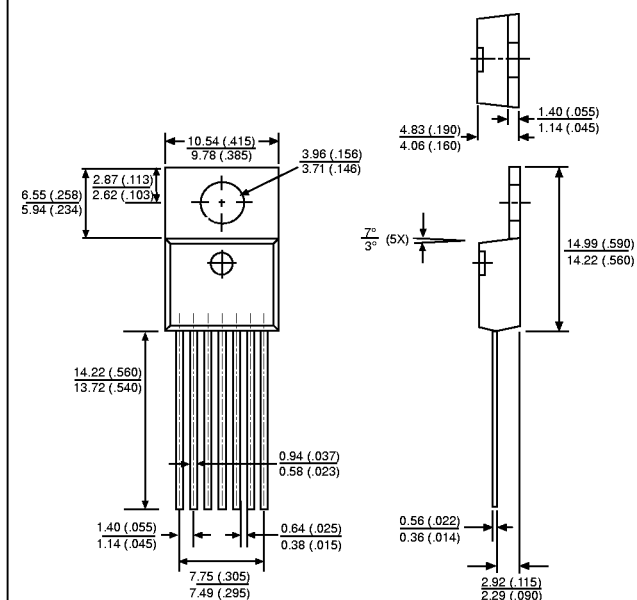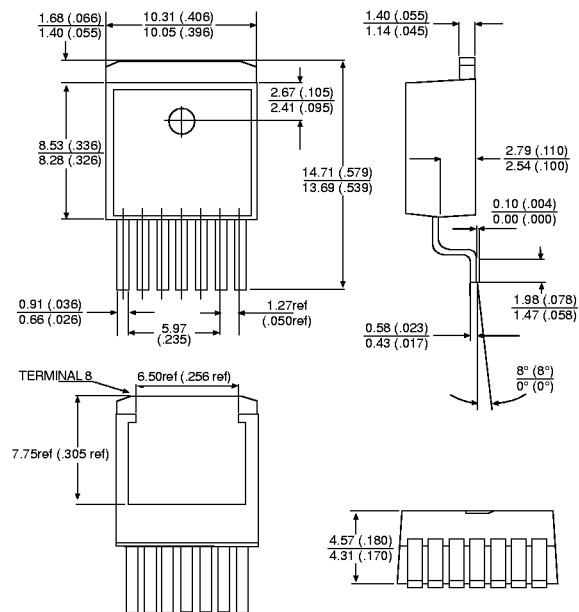7 Lead D²PAK

7 Lead Power SIP

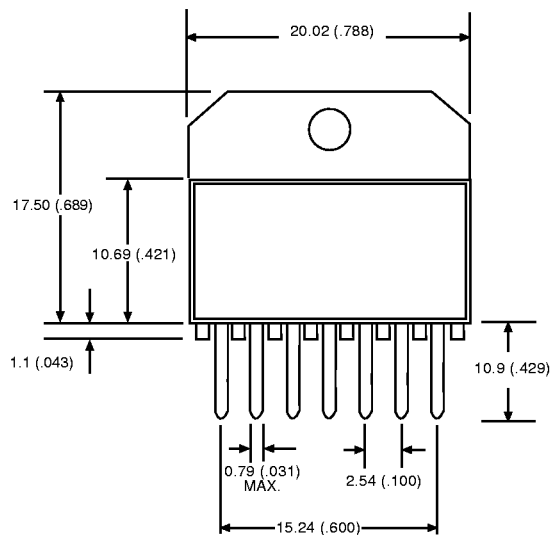

Ordering Information

Part Number	Description
CS-3720T7	7 Lead TO-220 Straight
CS-3720TV7	7 Lead TO-220 Vertical
CS-3720TH7	7 Lead TO-220 Horizontal
CS-3720 M7	7 Lead Power SIP Straight
CS-3720DPS7	7 Lead D ² PAK
CS-3720DPSR7	7 Lead D ² PAK Tape & Reel

Cherry Semiconductor Corporation reserves the right to make changes to the specifications without notice. Please contact Cherry Semiconductor Corporation for the latest available information.