

ICP641414PE

Rechargeable Lithium Ion Polymer Battery Pack 3.7 V
Safety Circuit,

Specifications

Renata Type	ICP641414
IEC Designation	ICP071517
Part Number	100694
Contact Method:	Wire AWG 30
Safety Circuit	Yes

Nominal Voltage	3.7 V
Typical Capacity	95 mAh
Minimum Capacity	85 mAh (0.2C cut off 3.0 V at 20°C)

Internal Impedance	< 550 mΩ / 30% SOC
--------------------	--------------------

Thickness (t)	Max 6.7 mm
Length (l)	Max 16.8 mm
Width (w)	Max 14.9 mm
Weight	~ 2.7 g

Charging Characteristic

Voltage	CC/CV – Constant Current / Constant Voltage
Current Normal	4.2 V CV
Max. Charging Current	0.5 C CC – 47.5 mA
Temperature at Charging	1.0 C CC – 95 mA
	0 °C 45 °C


Discharge Characteristic

Cut off Voltage	3.0 V
Max discharge Current	2.0 C – 190 mA (for non continues discharge)
	1.0 C – 95 mA (for continues discharge)
Temperature during Discharge	-20 °C ... 60 °C

Cycle Life at Room Temperature	> 80% of minimum capacity after 500 cycles (0.5 C charge, 0.5 C discharge)
--------------------------------	--

Storage Temperature	-20 °C ... 45 °C (0 °C ... 30 °C recommended in case of storage for more than 3 months)
---------------------	---

Dimensions

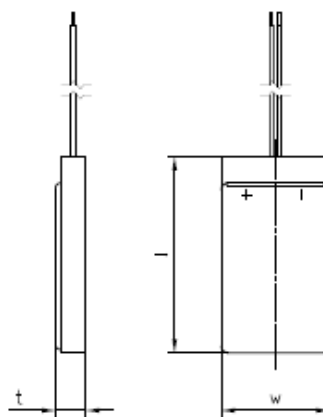

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the ASDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use

Rev. ICP641414 V02 08/2019