



45° Pluggable Angled Entry Sockets

Color: black - 5mm / light grey - 5.08mm


MATERIALS

Insulating housing: polyamide, flame resistant UL 94V-0
 continuous temperature 100°C
 copper alloy, nickel plated solder pins


UR ratings: 300V 15 A
 CSA ratings: 300V 15 A

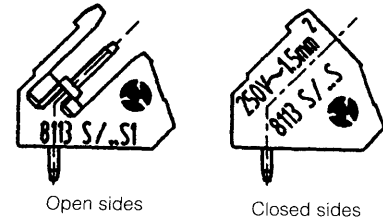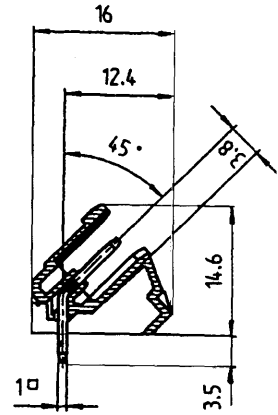


Open sides Closed sides



Open side



Closed side



8113 S...S 5 mm spacing part no.

L	I	Poles	Closed sides marked	Closed sides unmarked	Open sides marked	Open sides unmarked
9.60	5	2	25.394.0253.1	25.394.3253.1	25.395.0253.1	25.395.3253.1
14.60	10	3	25.394.0353.1	25.394.3353.1	25.395.0353.1	25.395.3353.1
19.60	15	4	25.394.0453.1	25.394.3453.1	25.395.0453.1	25.395.3453.1
24.60	20	5	25.394.0553.1	25.394.3553.1	25.395.0553.1	25.395.3553.1
29.60	25	6	25.394.0653.1	25.394.3653.1	25.395.0653.1	25.395.3653.1
34.60	30	7	25.394.0753.1	25.394.3753.1	25.395.0753.1	25.395.3753.1
39.60	35	8	25.394.0853.1	25.394.3853.1	25.395.0853.1	25.395.3853.1
44.60	40	9	25.394.0953.1	25.394.3953.1	25.395.0953.1	25.395.3953.1
49.60	45	10	25.394.1053.1	25.394.4053.1	25.395.1053.1	25.395.4053.1
54.60	50	11	25.394.1153.1	25.394.4153.1	25.395.1153.1	25.395.4153.1
59.60	55	12	25.394.1253.1	25.394.4253.1	25.395.1253.1	25.395.4253.1
64.60	60	13	25.394.1353.1	25.394.4353.1	25.395.1353.1	25.395.4353.1
69.60	65	14	25.394.1453.1	25.394.4453.1	25.395.1453.1	25.395.4453.1
74.60	70	15	25.394.1553.1	25.394.4553.1	25.395.1553.1	25.395.4553.1
79.60	75	16	25.394.1653.1	25.394.4653.1	25.395.1653.1	25.395.4653.1
84.60	80	17	25.394.1753.1	25.394.4753.1	25.395.1753.1	25.395.4753.1
89.60	85	18	25.394.1853.1	25.394.4853.1	25.395.1853.1	25.395.4853.1
94.60	90	19	25.394.1953.1	25.394.4953.1	25.395.1953.1	25.395.4953.1
99.60	95	20	25.394.2053.1	25.394.5053.1	25.395.2053.1	25.395.5053.1
104.60	100	21	25.394.2153.1	25.394.5153.1	25.395.2153.1	25.395.5153.1
109.60	105	22	25.394.2253.1	25.394.5253.1	25.395.2253.1	25.395.5253.1
114.60	110	23	25.394.2353.1	25.394.5353.1	25.395.2353.1	25.395.5353.1
119.60	115	24	25.394.2453.1	25.394.5453.1	25.395.2453.1	25.395.5453.1

8213 S...S 5.08 mm spacing part no.

L	I	Poles	Closed sides marked	Closed sides unmarked	Open sides marked	Open sides unmarked
11.36	5.08	2	25.396.0253.0	25.396.3253.0	25.397.0253.0	25.397.3253.0
16.44	10.16	3	25.396.0353.0	25.396.3353.0	25.397.0353.0	25.397.3353.0
21.52	15.24	4	25.396.0453.0	25.396.3453.0	25.397.0453.0	25.397.3453.0
26.68	20.32	5	25.396.0553.0	25.396.3553.0	25.397.0553.0	25.397.3553.0
31.68	25.40	6	25.396.0653.0	25.396.3653.0	25.397.0653.0	25.397.3653.0
36.76	30.48	7	25.396.0753.0	25.396.3753.0	25.397.0753.0	25.397.3753.0
41.84	35.56	8	25.396.0853.0	25.396.3853.0	25.397.0853.0	25.397.3853.0
46.92	40.64	9	25.396.0953.0	25.396.3953.0	25.397.0953.0	25.397.3953.0
52.00	45.72	10	25.396.1053.0	25.396.4053.0	25.397.1053.0	25.397.4053.0
57.08	50.80	11	25.396.1153.0	25.396.4153.0	25.397.1153.0	25.397.4153.0
62.16	55.88	12	25.396.1253.0	25.396.4253.0	25.397.1253.0	25.397.4253.0
67.24	60.96	13	25.396.1353.0	25.396.4353.0	25.397.1353.0	25.397.4353.0
72.34	65.04	14	25.396.1453.0	25.396.4453.0	25.397.1453.0	25.397.4453.0
77.40	71.12	15	25.396.1553.0	25.396.4553.0	25.397.1553.0	25.397.4553.0
82.48	76.20	16	25.396.1653.0	25.396.4653.0	25.397.1653.0	25.397.4653.0
87.56	81.28	17	25.396.1753.0	25.396.4753.0	25.397.1753.0	25.397.4753.0
92.64	86.36	18	25.396.1853.0	25.396.4853.0	25.397.1853.0	25.397.4853.0
97.72	91.44	19	25.396.1953.0	25.396.4953.0	25.397.1953.0	25.397.4953.0
102.80	96.52	20	25.396.2053.0	25.396.5053.0	25.397.2053.0	25.397.5053.0
107.88	101.60	21	25.396.2153.0	25.396.5153.0	25.397.2153.0	25.397.5153.0
112.96	106.68	22	25.396.2253.0	25.396.5253.0	25.397.2253.0	25.397.5253.0
118.04	111.76	23	25.396.2353.0	25.396.5353.0	25.397.2353.0	25.397.5353.0
123.62	116.84	24	25.396.2453.0	25.396.5453.0	25.397.2453.0	25.397.5453.0