


USB TYPE A
ID: 416


USB - A - XXXX P/A

Series 730



TECHNICAL DATA

Insulating Material	Thermoplast, high temp. thermoplast UL94V-0
Contact Material	phosphor bronze
Rated Current	0,5 Amp.
Rated Voltage	40 V
Withstanding Voltage	500 V _{AC}
Operating Temperature	-25°C to +85°C
Maximum Soldering Temperature	L: 230°C for 5 seconds, U: 260°C for 10 seconds

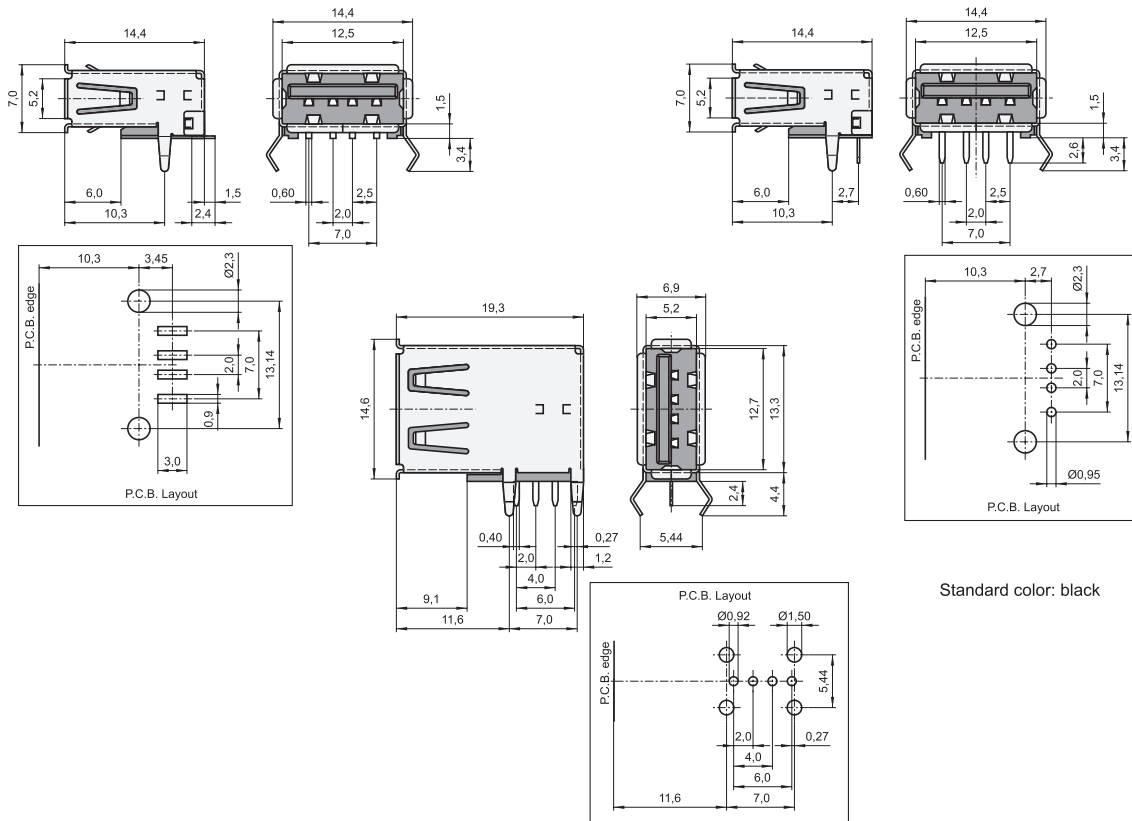

Standard color: black

All dimensions in mm.
Other versions upon request.

USB - A - XXXXX GT - 004 X

- A: Type A
- Code: 0700P = parallel SMD, height 7,00mm
0700A = right angled DIP, height 7,00mm
1460A = right angled DIP, height 14,6mm
- GT: sel. Au
- RoHS: U = RoHS-compliant with high temp. plastic
L = RoHS-compliant with standard temp. plastic
- 004: 4 contacts