


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
FFCM**	1.00 LB/100 PCS (454.54g/100 PCS)

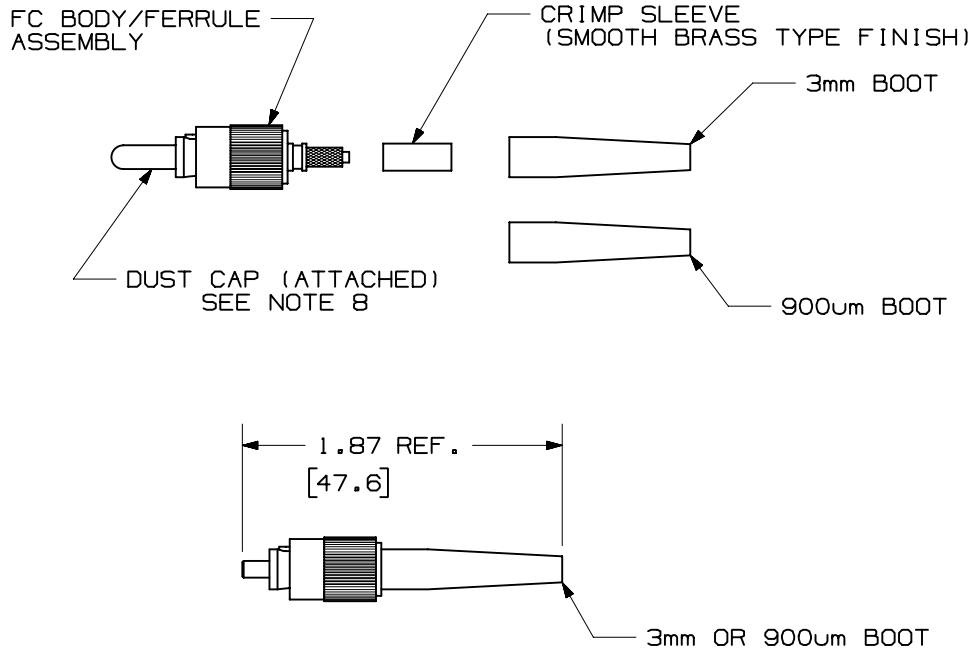

NOTES:

- SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
- ACCEPTS 50/125 or 62.5/125 MICRON MULTIMODE GLASS OPTICAL FIBER.
- THE MAX. INSERTION LOSS PER CONNECTOR IS 0.75dB. OPERATING TEMP. RANGE IS FROM -40° TO 70°.
- FULLY COMPLIES WITH THE FIBER OPTIC CONNECTOR PERFORMANCE REQUIREMENTS AS SPECIFIED IN TIA/EIA-568-A.
- DIMENSIONS IN BRACKETS [ mm ] ARE IN METRIC.
- MATERIAL:  
BODY/HARDWARE: NICKEL PLATED ZINC  
BOOT: THERMOPLASTIC RUBBER  
FERRULE: ZIRCONIA CERAMIC
- FERRULE DIAMETER: 2.4985/2.4995mm.
- SHAPE OF DUSTCAP MAY VARY.

CAD FILENAME/LAYERS		M00748AA_DC_00A.PRT	
		CORP. TINLEY PARK, ILLINOIS	
		FC SIMPLEX MULTIMODE CONNECTOR (FFCM**) CUSTOMER DRAWING	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ±.06(1.5)(.XXX) ± .010(.3) (.XX) ±.03(.8) ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY EFK	MAT'L:	SCALE FULL	
DATE 06-05-00	SEE NOTES	DRAWING NO.	DWG SIZE
CHK'D		00748-02	A

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	06-05-00	EFK		RELEASED FOR PRODUCTION	00748-02				