

SR4-DR

- 3 Connections



PTR

Phoenix Mecano Brand

Technical Data



Wire sizes		Insulating Material	
Solid min	0.2 mm ²	Material	PA 6.6
Solid max	4.0 mm ²	Flammability Class	UL 94 V-2
Stranded (flexible) min	0.2mm ²	Temperatures	
Stranded (flexible) max	4.0 mm ²	Working Temperature	-40 - 105 °C
Stranded with Ferrule min	0.2 mm ²	Dimensions	
Stranded with Ferrule max	2.5 mm ²	Stripped Length	12.0 mm
Clamping Range min	0.2mm ²	Width	6.0 mm
Clamping Range max	4.0 mm ²	Length	57.5 mm
		Height TS35 x 7.5	47.0 mm
		Height TS32	51.5 mm

Electrical Data


General

Cross Connection Channels	1
Test Pick off	1

Colours

	BEIGE, similar RAL 1019
	BLUE, similar RAL 5015

Connection Diagram

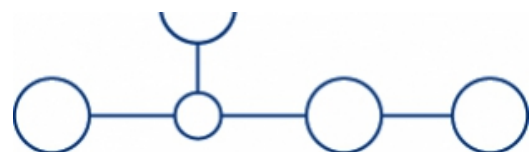

Order Data

Article Designation	Article Number	PU
SR4-DR-BEIGE	41210.2	100
SR4-DR-BLUE	41210.5	100

Accessoires

Article Designation	Article Number	PU
Einlegprofile EP240	492360.0	10
Insulation Plates TRS1	492003.2	100
Cross-Connection uninsulated Q2	492019.0	50
Cross-Connection insulated QI2	492740.2	50
Cross-Connection uninsulated Q3	492020.0	50
Cross-Connection insulated QI3	492741.2	50
Cross-Connection uninsulated Q4	492021.0	20
Cross-Connection insulated QI4	492742.2	20
Cross-Connection uninsulated Q10	492022.0	10
Cross-Connection insulated QI10	492743.2	10
End Stopn E535/K/ST	492828.0	50
Test Adapter TA6/1/ST	492813.0	10
Quick Labelling PSB6/50	494702.7	500

Ratings

Ratings	UR		IEC
Rated Voltage	600 V	600 V	500 V
Rated Current	30 A	30 A	24 A
Rated Wire Size	AWG 22-12	AWG 22-12	4.0 mm ²
Rated Impulse Voltage			6 V
Pollution Degree			3