

Rochester Electronics Manufactured Components

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All recreations are done with the approval of the OCM.

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceed the OCM data sheet.

Quality Overview

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-35835
 - Class Q Military
 - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
 - Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OEM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.

SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49 SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49 BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS

SDLS111 – MARCH 1974 – REVISED MARCH 1988

'46A, '47A, 'LS47 feature

- Open-Collector Outputs Drive Indicators Directly
- Lamp-Test Provision
- Leading/Trailing Zero Suppression

'48, 'LS48 feature


- Internal Pull-Ups Eliminate Need for External Resistors
- Lamp-Test Provision
- Leading/Trailing Zero Suppression

'LS49 feature


- Open-Collector Outputs
- Blanking Input

SN5446A, SN5447A, SN54LS47, SN5448,
SN54LS48 . . . J PACKAGE
SN7446A, SN7447A,
SN7448 . . . N PACKAGE
SN74LS47, SN74LS48 . . . D OR N PACKAGE

(TOP VIEW)




SN54LS47, SN54LS48 . . . FK PACKAGE
(TOP VIEW)

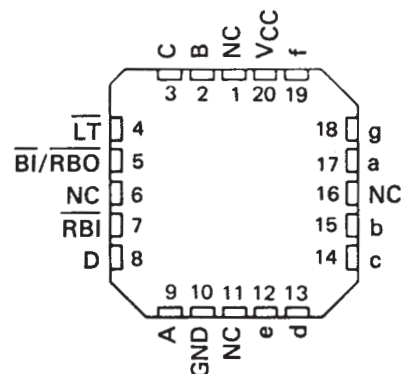


SN54LS49 . . . J OR W PACKAGE
SN74LS49 . . . D OR N PACKAGE

(TOP VIEW)



SN54LS49 . . . FK PACKAGE
(TOP VIEW)

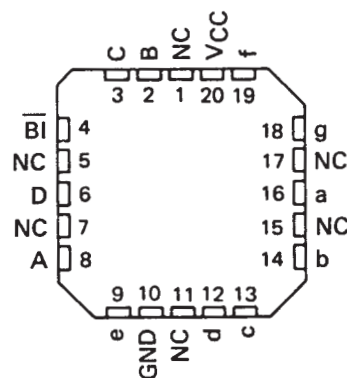

NC – No internal connection


SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49
 SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49
 BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS

SDLS111 – MARCH 1974 – REVISED MARCH 1988

- All Circuit Types Feature Lamp Intensity Modulation Capability

| TYPE | DRIVER OUTPUTS | | | | TYPICAL POWER DISSIPATION | PACKAGES |
|----------|----------------|----------------------|--------------|-------------|---------------------------|----------|
| | ACTIVE LEVEL | OUTPUT CONFIGURATION | SINK CURRENT | MAX VOLTAGE | | |
| SN5446A | low | open-collector | 40 mA | 30 V | 320 mW | J, W |
| SN5447A | low | open-collector | 40 mA | 15 V | 320 mW | J, W |
| SN5448 | high | 2-k Ω pull-up | 6.4 mA | 5.5 V | 265 mW | J,W |
| SN54LS47 | low | open-collector | 12 mA | 15 V | 35 mW | J, W |
| SN54LS48 | high | 2-k Ω pull-up | 2 mA | 5.5 V | 125 mW | J, W |
| SN54LS49 | high | open-collector | 4 mA | 5.5 V | 40 mW | J, W |
| SN7446A | low | open-collector | 40 mA | 30 V | 320 mW | J, N |
| SN7447A | low | open-collector | 40 mA | 15 V | 320 mW | J, N |
| SN7448 | high | 2-k Ω pull-up | 6.4 mA | 5.5 V | 265 mW | J, N |
| SN74LS47 | low | open-collector | 24 mA | 15 V | 35 mW | J, N |
| SN74LS48 | high | 2-k Ω pull-up | 6 mA | 5.5 V | 125 mW | J, N |
| SN74LS49 | high | open-collector | 8 mA | 5.5 V | 40 mW | J, N |

logic symbols †

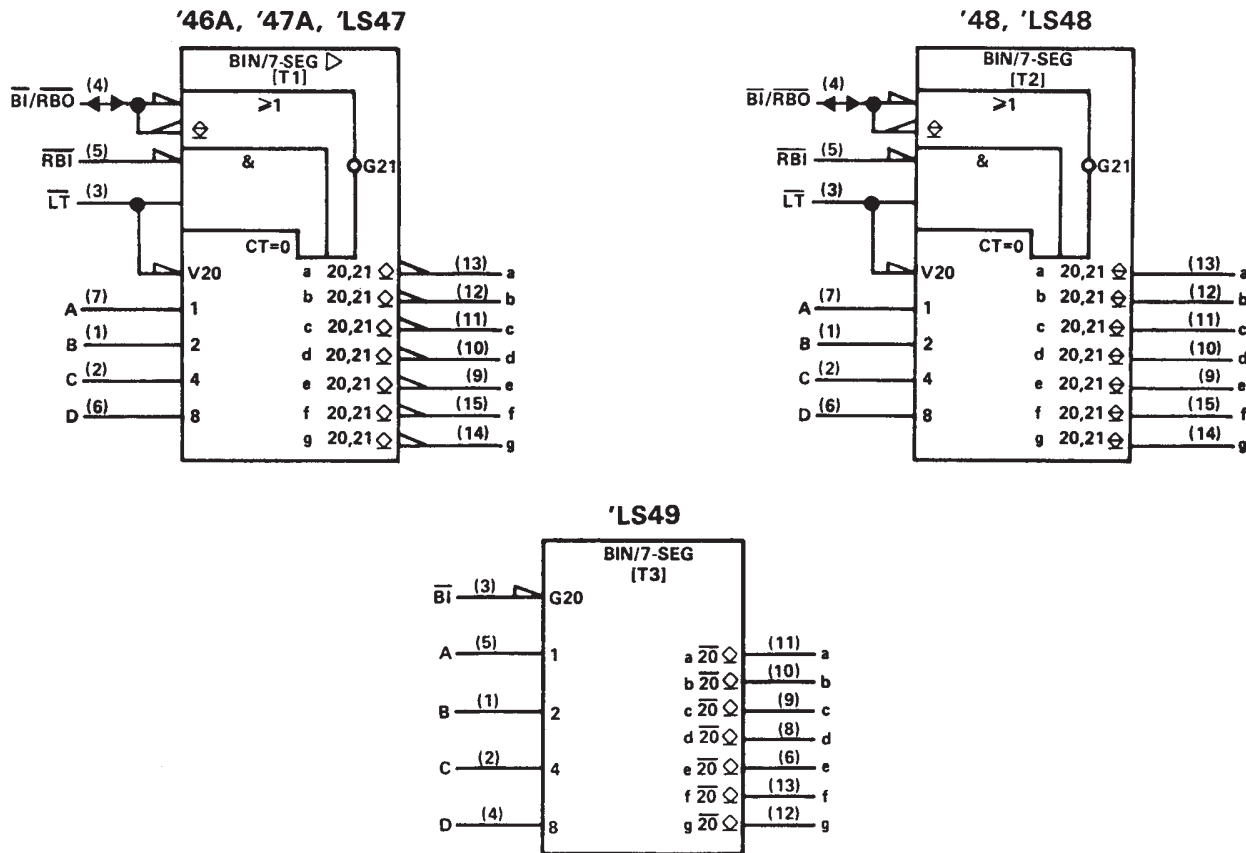

†These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12. Pin numbers shown are for D, J, N, and W packages.



SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49 SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49 BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS

SDLS111 – MARCH 1974 – REVISED MARCH 1988

description

The '46A, '47A, and 'LS47 feature active-low outputs designed for driving common-anode LEDs or incandescent indicators directly. The '48, 'LS48, and 'LS49 feature active-high outputs for driving lamp buffers or common-cathode LEDs. All of the circuits except 'LS49 have full ripple-blanking input/output controls and a lamp test input. The 'LS49 circuit incorporates a direct blanking input. Segment identification and resultant displays are shown below. Display patterns for BCD input counts above 9 are unique symbols to authenticate input conditions.

The '46A, '47A, '48, 'LS47, and 'LS48 circuits incorporate automatic leading and/or trailing-edge zero-blanking control (\overline{RBI} and \overline{RBO}). Lamp test (\overline{LT}) of these types may be performed at any time when the $\overline{BI/RBO}$ node is at a high level. All types (including the '49 and 'LS49) contain an overriding blanking input (\overline{BI}), which can be used to control the lamp intensity by pulsing or to inhibit the outputs. Inputs and outputs are entirely compatible for use with TTL logic outputs.

The SN54246/SN74246 and '247 and the SN54LS247/SN74LS247 and 'LS248 compose the $\overline{6}$ and the $\overline{9}$ with tails and were designed to offer the designer a choice between two indicator fonts.



'46A, '47A, 'LS47 FUNCTION TABLE (T1)

| DECIMAL OR FUNCTION | INPUTS | | | | | | $\overline{BI/RBO}^\dagger$ | OUTPUTS | | | | | | | NOTE | |
|---------------------|-----------------|------------------|---|---|---|---|-----------------------------|---------|-----|-----|-----|-----|-----|-----|------|---|
| | \overline{LT} | \overline{RBI} | D | C | B | A | | a | b | c | d | e | f | g | | |
| 0 | H | H | L | L | L | L | H | ON | ON | ON | ON | ON | ON | OFF | OFF | 1 |
| 1 | H | X | L | L | L | H | H | OFF | ON | ON | OFF | OFF | OFF | OFF | OFF | |
| 2 | H | X | L | L | H | L | H | ON | ON | OFF | ON | ON | OFF | ON | ON | |
| 3 | H | X | L | L | H | H | H | ON | ON | ON | ON | OFF | OFF | ON | ON | |
| 4 | H | X | L | H | L | L | H | OFF | ON | ON | OFF | OFF | ON | ON | ON | |
| 5 | H | X | L | H | L | H | H | ON | OFF | ON | ON | OFF | ON | ON | ON | |
| 6 | H | X | L | H | H | L | H | OFF | OFF | ON | ON | ON | ON | ON | ON | |
| 7 | H | X | L | H | H | H | H | ON | ON | ON | OFF | OFF | OFF | OFF | OFF | |
| 8 | H | X | H | L | L | L | H | ON | ON | ON | ON | ON | ON | ON | ON | |
| 9 | H | X | H | L | L | H | H | ON | ON | ON | OFF | OFF | ON | ON | ON | |
| 10 | H | X | H | L | H | L | H | OFF | OFF | OFF | ON | ON | OFF | ON | ON | |
| 11 | H | X | H | L | H | H | H | OFF | OFF | ON | ON | OFF | OFF | ON | ON | |
| 12 | H | X | H | H | L | L | H | OFF | ON | OFF | OFF | OFF | ON | ON | ON | |
| 13 | H | X | H | H | L | H | H | ON | OFF | OFF | ON | OFF | ON | ON | ON | |
| 14 | H | X | H | H | H | L | H | OFF | OFF | OFF | ON | ON | ON | ON | ON | |
| 15 | H | X | H | H | H | H | H | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | |
| BI | X | X | X | X | X | X | L | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | 2 |
| RBI | H | L | L | L | L | L | L | OFF | OFF | OFF | OFF | OFF | OFF | OFF | OFF | 3 |
| LT | L | X | X | X | X | X | H | ON | ON | ON | ON | ON | ON | ON | ON | 4 |

H = high level, L = low level, X = irrelevant

NOTES: 1. The blanking input (\overline{BI}) must be open or held at a high logic level when output functions 0 through 15 are desired. The ripple-blanking input (\overline{RBI}) must be open or high if blanking of a decimal zero is not desired.

2. When a low logic level is applied directly to the blanking input (\overline{BI}), all segment outputs are off regardless of the level of any other input.

3. When ripple-blanking input (\overline{RBI}) and inputs A, B, C, and D are at a low level with the lamp test input high, all segment outputs go off and the ripple-blanking output (\overline{RBO}) goes to a low level (response condition).

4. When the blanking input/ripple blanking output ($\overline{BI/RBO}$) is open or held high and a low is applied to the lamp-test input, all segment outputs are on.

$^\dagger \overline{BI/RBO}$ is wire AND logic serving as blanking input (\overline{BI}) and/or ripple-blanking output (\overline{RBO}).



SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49
 SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49
 BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS

SDLS111 – MARCH 1974 – REVISED MARCH 1988

'48, 'LS48
 FUNCTION TABLE (T2)

| DECIMAL OR FUNCTION | INPUTS | | | | | $\overline{BI}/\overline{RBO}^\dagger$ | OUTPUTS | | | | | | | NOTE |
|---------------------|-----------------|------------------|---|---|---|--|---------|---|---|---|---|---|---|------|
| | \overline{LT} | \overline{RBI} | D | C | B | | A | a | b | c | d | e | f | |
| 0 | H | H | L | L | L | L | H | H | H | H | H | H | L | 1 |
| 1 | H | X | L | L | L | H | H | L | H | H | L | L | L | |
| 2 | H | X | L | L | H | L | H | H | H | L | H | H | L | |
| 3 | H | X | L | L | H | H | H | H | H | H | L | L | H | |
| 4 | H | X | L | H | L | L | H | L | H | H | L | L | H | |
| 5 | H | X | L | H | L | H | H | H | L | H | H | L | H | |
| 6 | H | X | L | H | H | L | H | L | L | H | H | H | H | |
| 7 | H | X | L | H | H | H | H | H | H | H | L | L | L | |
| 8 | H | X | H | L | L | L | H | H | H | H | H | H | H | |
| 9 | H | X | H | L | L | H | H | H | H | L | L | H | H | |
| 10 | H | X | H | L | H | L | H | L | L | L | H | H | L | |
| 11 | H | X | H | L | H | H | H | L | L | H | H | L | L | |
| 12 | H | X | H | H | L | L | H | L | H | L | L | L | H | |
| 13 | H | X | H | H | L | H | H | H | L | L | H | L | H | |
| 14 | H | X | H | H | H | L | H | L | L | L | H | H | H | |
| 15 | H | X | H | H | H | H | H | L | L | L | L | L | L | |
| BI | X | X | X | X | X | X | L | L | L | L | L | L | L | 2 |
| RBI | H | L | L | L | L | L | L | L | L | L | L | L | L | 3 |
| LT | L | X | X | X | X | X | H | H | H | H | H | H | H | 4 |

H = high level, L = low level, X = irrelevant

- NOTES: 1. The blanking input (\overline{BI}) must be open or held at a high logic level when output functions 0 through 15 are desired. The ripple-blanking input (\overline{RBI}) must be open or high, if blanking of a decimal zero is not desired.
2. When a low logic level is applied directly to the blanking input (\overline{BI}), all segment outputs are low regardless of the level of any other input.
3. When ripple-blanking input (\overline{RBI}) and inputs A, B, C, and D are at a low level with the lamp-test input high, all segment outputs go low and the ripple-blanking output (\overline{RBO}) goes to a low level (response condition).
4. When the blanking input/ripple-blanking output ($\overline{BI}/\overline{RBO}$) is open or held high and a low is applied to the lamp-test input, all segment outputs are high.

$^\dagger \overline{BI}/\overline{RBO}$ is wire-AND logic serving as blanking input (\overline{BI}) and/or ripple-blanking output (\overline{RBO}).

'LS49
 FUNCTION TABLE (T3)

| DECIMAL OR FUNCTION | INPUTS | | | | | \overline{BI} | OUTPUTS | | | | | | | NOTE |
|---------------------|--------|---|---|---|---|-----------------|---------|---|---|---|---|---|---|------|
| | D | C | B | A | a | | b | c | d | e | f | g | | |
| 0 | L | L | L | L | L | H | H | H | H | H | H | L | 1 | |
| 1 | L | L | L | H | L | H | L | H | H | L | L | L | | |
| 2 | L | L | H | L | L | H | H | H | L | H | H | L | | |
| 3 | L | L | H | H | L | H | H | H | H | H | L | L | | |
| 4 | L | H | L | L | L | H | L | H | H | L | L | H | | |
| 5 | L | H | L | H | L | H | H | L | H | H | L | H | | |
| 6 | L | H | H | L | L | H | L | L | H | H | H | H | | |
| 7 | L | H | H | H | L | H | H | H | H | L | L | L | | |
| 8 | H | L | L | L | L | H | H | H | H | H | H | H | | |
| 9 | H | L | L | H | L | H | H | H | H | L | L | H | | |
| 10 | H | L | H | L | L | H | L | L | L | H | H | L | | |
| 11 | H | L | H | H | L | H | L | L | H | H | L | L | | |
| 12 | H | H | L | L | L | H | L | H | L | L | L | H | | |
| 13 | H | H | L | H | L | H | H | L | L | L | H | L | | |
| 14 | H | H | H | L | L | H | L | L | L | H | H | H | | |
| 15 | H | H | H | H | L | H | L | L | L | L | L | L | | |
| BI | X | X | X | X | X | L | L | L | L | L | L | L | 2 | |

H = high level, L = low level, X = irrelevant



- NOTES: 1. The blanking input (\overline{BI}) must be open or held at a high logic level when output functions 0 through 15 are desired.
2. When a low logic level is applied directly to the blanking input (\overline{BI}), all segment outputs are low regardless of the level of any other input.



SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49
 SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49
 BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS

SDLS111 - MARCH 1974 - REVISED MARCH 1988

logic diagrams (positive logic)

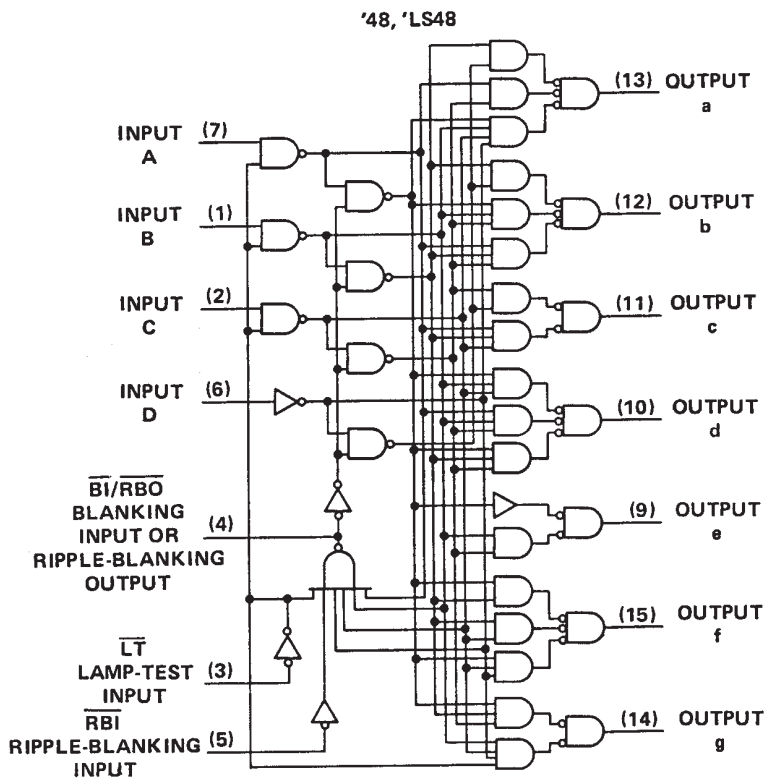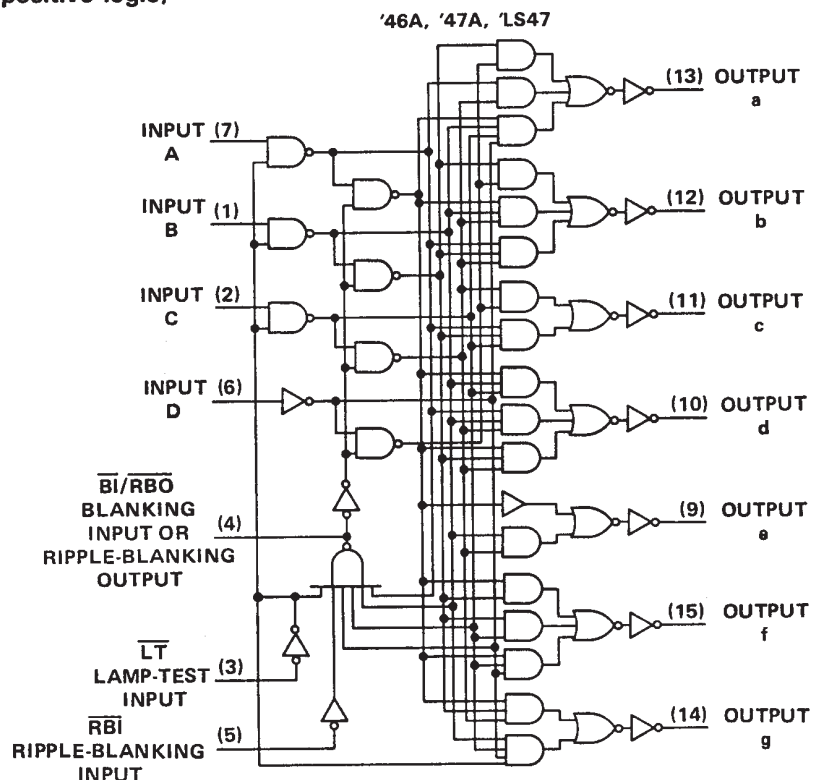


Pin numbers shown are for D, J, N, and W packages.



SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49
 SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49
 BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS

SDLS111 – MARCH 1974 – REVISED MARCH 1988

logic diagrams (continued)

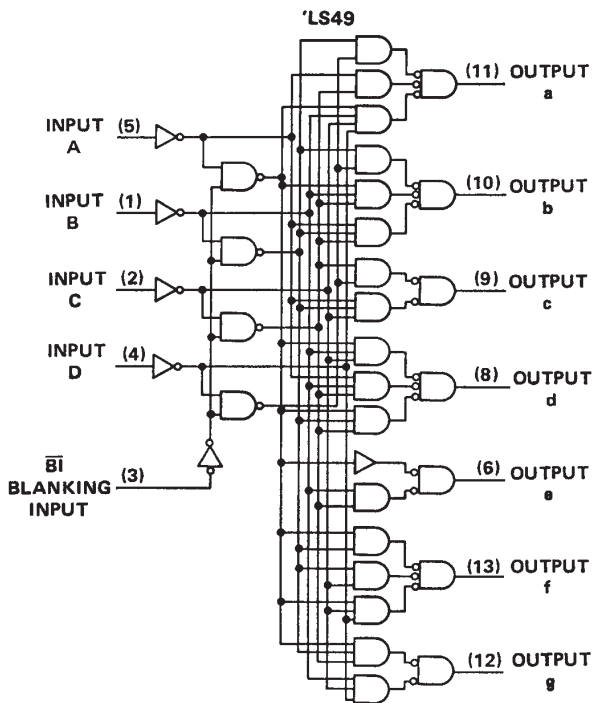


Pin numbers shown are for D, J, N, and W packages.

SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49
 SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49
 BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS


SDLS111 - MARCH 1974 - REVISED MARCH 1988

schematics of inputs and outputs


'46A, '47A, '48

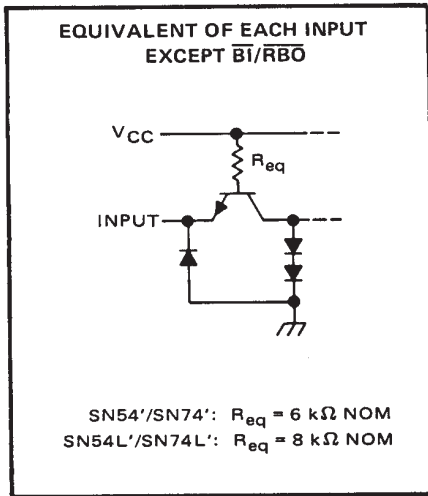


'46A, '47A, '48

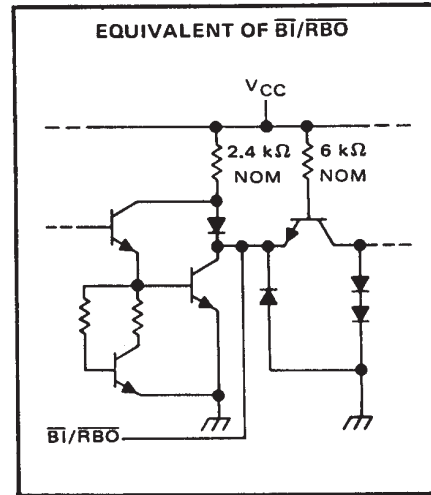

'46A, '47A

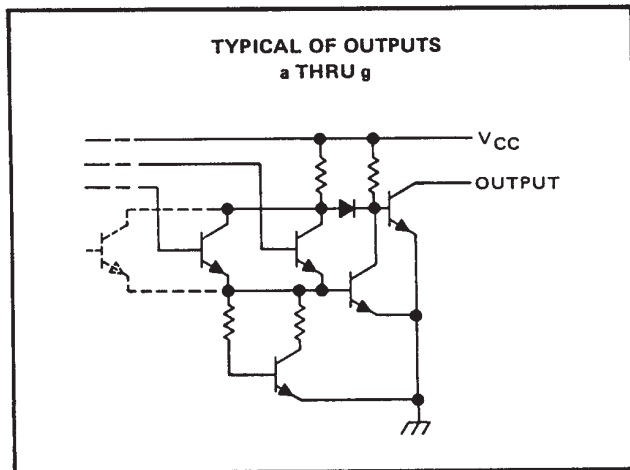

'48

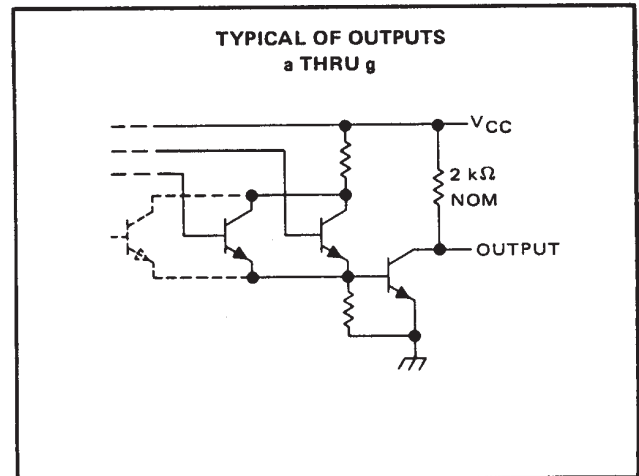


SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49
 SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49
 BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS


SDLS111 - MARCH 1974 - REVISED MARCH 1988

schematics of inputs and outputs


'LS47, 'LS48, 'LS49

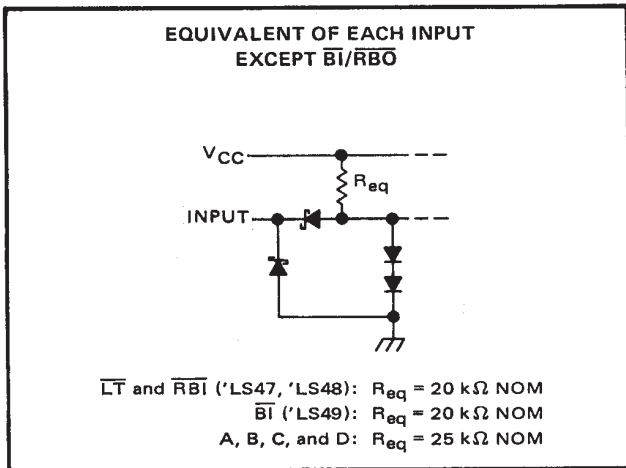


'LS47, 'LS48, 'LS49

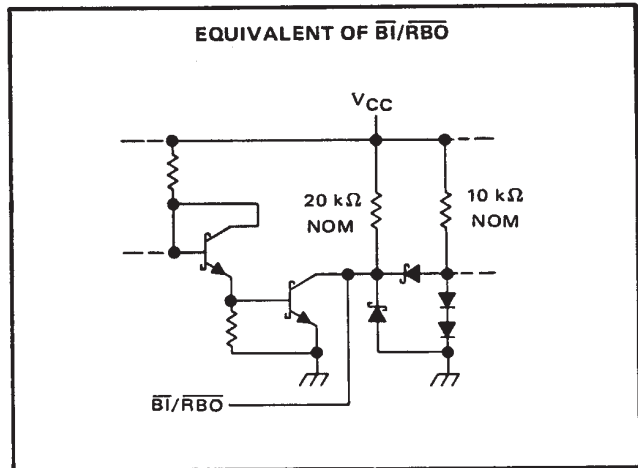


'LS47

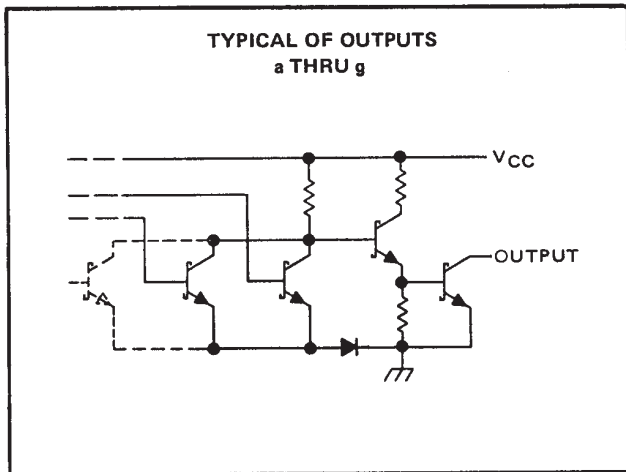

'LS48

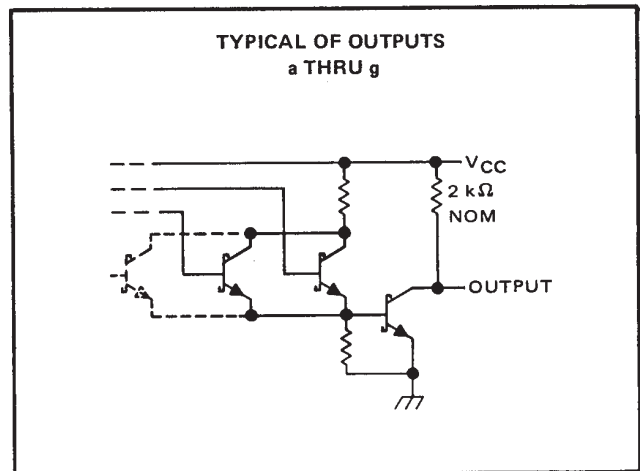

'LS49

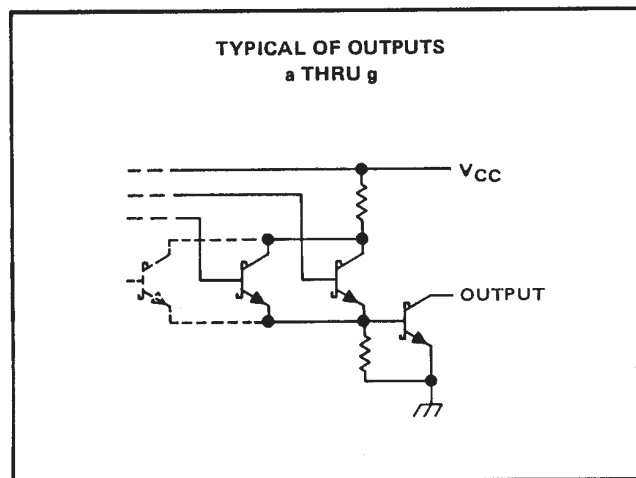

SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49
SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49
BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS

SDLS111 – MARCH 1974 – REVISED MARCH 1988

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

| | |
|--|----------------|
| Supply voltage, V_{CC} (see Note 1) | 7 V |
| Input voltage | 5.5 V |
| Current forced into any output in the off state | 1 mA |
| Operating free-air temperature range: SN5446A, SN5447A | –55°C to 125°C |
| SN7446A, SN7447A | 0°C to 70°C |
| Storage temperature range | –65°C to 150°C |

NOTE 1: Voltage values are with respect to network ground terminal.

recommended operating conditions

| | SN5446A | | | SN5447A | | | SN7446A | | | SN7447A | | | UNIT | | | | |
|--|--------------------------------|-----|-----|---------|-----|-----|---------|-----|------|---------|-----|------|------|---------|---|----|----|
| | MIN | NOM | MAX | MIN | NOM | MAX | MIN | NOM | MAX | MIN | NOM | MAX | | | | | |
| Supply voltage, V_{CC} | 4.5 | 5 | 5.5 | 4.5 | 5 | 5.5 | 4.75 | 5 | 5.25 | 4.75 | 5 | 5.25 | V | | | | |
| Off-state output voltage, $V_{O(off)}$ | a thru g | | | 30 | | | 15 | | | 30 | | | 15 | V | | | |
| On-state output current, $I_{O(on)}$ | a thru g | | | 40 | | | 40 | | | 40 | | | 40 | mA | | | |
| High-level output current, I_{OH} | $\overline{BI}/\overline{RBO}$ | | | –200 | | | –200 | | | –200 | | | –200 | μ A | | | |
| Low-level output current, I_{OL} | $\overline{BI}/\overline{RBO}$ | | | 8 | | | 8 | | | 8 | | | 8 | mA | | | |
| Operating free-air temperature, T_A | –55 | | | 125 | | | –55 | | | 125 | | | 0 | 70 | 0 | 70 | °C |

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS† | MIN | TYP‡ | MAX | UNIT |
|--------------|--|---|-------|------|------|---------|
| V_{IH} | High-level input voltage | | 2 | | | V |
| V_{IL} | Low-level input voltage | | | 0.8 | | V |
| V_{IK} | Input clamp voltage | $V_{CC} = \text{MIN}, I_I = -12 \text{ mA}$ | | | –1.5 | V |
| V_{OH} | High-level output voltage | $\overline{BI}/\overline{RBO}$ $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V},$ $V_{IL} = 0.8 \text{ V}, I_{OH} = -200 \mu\text{A}$ | 2.4 | 3.7 | | V |
| V_{OL} | Low-level output voltage | $\overline{BI}/\overline{RBO}$ $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V},$ $V_{IL} = 0.8 \text{ V}, I_{OL} = 8 \text{ mA}$ | | 0.27 | 0.4 | V |
| $I_{O(off)}$ | Off-state output current | a thru g $V_{CC} = \text{MAX}, V_{IH} = 2 \text{ V},$ $V_{IL} = 0.8 \text{ V}, V_{O(off)} = \text{MAX}$ | | | 250 | μ A |
| $V_{O(on)}$ | On-state output voltage | a thru g $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V},$ $V_{IL} = 0.8 \text{ V}, I_{O(on)} = 40 \text{ mA}$ | | 0.3 | 0.4 | V |
| I_I | Input current at maximum input voltage | Any input except $\overline{BI}/\overline{RBO}$ $V_{CC} = \text{MAX}, V_I = 5.5 \text{ V}$ | | | 1 | mA |
| I_{IH} | High-level input current | Any input except $\overline{BI}/\overline{RBO}$ $V_{CC} = \text{MAX}, V_I = 2.4 \text{ V}$ | | | 40 | μ A |
| I_{IL} | Low-level input current | Any input except $\overline{BI}/\overline{RBO}$ $V_{CC} = \text{MAX}, V_I = 0.4 \text{ V}$ | | | –1.6 | mA |
| | | $\overline{BI}/\overline{RBO}$ | | | –4 | |
| I_{OS} | Short-circuit output current | $\overline{BI}/\overline{RBO}$ $V_{CC} = \text{MAX}$ | | | –4 | mA |
| I_{CC} | Supply current | $V_{CC} = \text{MAX},$ See Note 2 | SN54' | 64 | 85 | mA |
| | | | SN74' | 64 | 103 | |

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$.

NOTE 2: I_{CC} is measured with all outputs open and all inputs at 4.5 V.

switching characteristics, $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------|---|--|-----|-----|-----|------|
| t_{off} | Turn-off time from A input | $C_L = 15 \text{ pF}, R_L = 120 \Omega,$ See Note 3 | | | 100 | ns |
| t_{on} | Turn-on time from A input | | | | 100 | |
| t_{off} | Turn-off time from $\overline{RB1}$ input | | | | 100 | ns |
| t_{on} | Turn-on time from $\overline{RB1}$ input | | | | 100 | |

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



**SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49
SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49
BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS**

SDLS111 – MARCH 1974 – REVISED MARCH 1988

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

| | |
|--|----------------|
| Supply voltage, V_{CC} (see Note 1) | 7 V |
| Input voltage | 5.5 V |
| Operating free-air temperature range: SN5448 | -55°C to 125°C |
| SN7448 | 0°C to 70°C |
| Storage temperature range | -65°C to 150°C |

NOTE 1: Voltage values are with respect to network ground terminal.

recommended operating conditions

| | SN5448 | | | SN7448 | | | UNIT | | |
|---------------------------------------|--------------------------------|-----|------|--------|-----|------|---------|----|----|
| | MIN | NOM | MAX | MIN | NOM | MAX | | | |
| Supply voltage, V_{CC} | 4.5 | 5 | 5.5 | 4.75 | 5 | 5.25 | V | | |
| High-level output current, I_{OH} | a thru g | | -400 | | | -400 | μ A | | |
| | $\overline{BI}/\overline{RBO}$ | | -200 | | | -200 | | | |
| Low-level output current, I_{OL} | a thru g | | 6.4 | | | 6.4 | mA | | |
| | $\overline{BI}/\overline{RBO}$ | | 8 | | | 8 | | | |
| Operating free-air temperature, T_A | | | -55 | | | 125 | 0 | 70 | °C |

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS† | MIN | TYP‡ | MAX | UNIT |
|-----------|--|---|---|--------------|--------------|------|
| V_{IH} | High-level input voltage | | 2 | | | V |
| V_{IL} | Low-level input voltage | | | | 0.8 | V |
| V_{IK} | Input clamp voltage | $V_{CC} = \text{MIN}, I_I = -12 \text{ mA}$ | | | -1.5 | V |
| V_{OH} | High-level output voltage | a thru g | $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V},$ | 2.4 | 4.2 | V |
| | | $\overline{BI}/\overline{RBO}$ | $V_{IL} = 0.8 \text{ V}, I_{OH} = \text{MAX}$ | 2.4 | 3.7 | |
| I_O | Output current | a thru g | $V_{CC} = \text{MIN}, V_O = 0.85 \text{ V},$ | -1.3 | -2 | mA |
| | | | Input conditions as for V_{OH} | | | |
| V_{OL} | Low-level output voltage | | $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V},$ | 0.27 | 0.4 | V |
| | | | $V_{IL} = 0.8 \text{ V}, I_{OL} = \text{MAX}$ | | | |
| I_I | Input current at maximum input voltage | Any input except $\overline{BI}/\overline{RBO}$ | $V_{CC} = \text{MAX}, V_I = 5.5 \text{ V}$ | | 1 | mA |
| I_{IH} | High-level input current | Any input except $\overline{BI}/\overline{RBO}$ | $V_{CC} = \text{MAX}, V_I = 2.4 \text{ V}$ | | 40 | |
| I_{IL} | Low-level input current | Any input except $\overline{BI}/\overline{RBO}$ | $V_{CC} = \text{MAX}, V_I = 0.4 \text{ V}$ | | -1.6 | mA |
| | | $\overline{BI}/\overline{RBO}$ | | | -4 | |
| I_{OS} | Short-circuit output current | $\overline{BI}/\overline{RBO}$ | $V_{CC} = \text{MAX}$ | | -4 | mA |
| I_{CC} | Supply current | | $V_{CC} = \text{MAX},$ See Note 2 | SN5448 53 | SN7448 76 | |
| | | | | SN5448 53 | SN7448 90 | |

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$.

NOTE 2: I_{CC} is measured with all outputs open and all inputs at 4.5 V.

switching characteristics, $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------|--|-----|-----|-----|------|
| t_{PHL} | $C_L = 15 \text{ pF}, R_L = 1 \text{ k}\Omega$ See Note 3 | | | 100 | ns |
| t_{PLH} | | | | 100 | |
| t_{PHL} | | | | 100 | ns |
| t_{PLH} | | | | 100 | |

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49
SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49
BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS

SDLS111 – MARCH 1974 – REVISED MARCH 1988

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

| | |
|---|--|
| Supply voltage, V_{CC} (see Note 1) | 7 V |
| Input voltage | 7 V |
| Peak output current ($t_w \leq 1$ ms, duty cycle $\leq 10\%$) | 200 mA |
| Current forced into any output in the off state | 1 mA |
| Operating free-air temperature range: SN54LS47 | -55°C to 125°C |
| SN74LS47 | 0°C to 70°C |
| Storage temperature range | -65°C to 150°C |

NOTE 1: Voltage values are with respect to network ground terminal.

recommended operating conditions

| | SN54LS47 | | | SN74LS47 | | | UNIT |
|--|---|-----|-----|----------|-----|------|------------------|
| | MIN | NOM | MAX | MIN | NOM | MAX | |
| Supply voltage, V_{CC} | 4.5 | 5 | 5.5 | 4.75 | 5 | 5.25 | V |
| Off-state output voltage, $V_{O(off)}$ | a thru g | | | 15 | | | V |
| On-state output current, $I_{O(on)}$ | a thru g | | | 12 | | | 24 mA |
| High-level output current, I_{OH} | $\overline{BI}/\overline{RB\overline{O}}$ | | | -50 | | | μA |
| Low-level output current, I_{OL} | $\overline{BI}/\overline{RB\overline{O}}$ | | | 1.6 | | | 3.2 mA |
| Operating free-air temperature, T_A | -55 | 125 | | 0 | 70 | | $^\circ\text{C}$ |

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS† | SN54LS47 | | SN74LS47 | | UNIT |
|--------------|--|--|--|------|----------------------------------|-----|---------------|
| | | | MIN | TYP‡ | MAX | MIN | |
| V_{IH} | High-level input voltage | | 2 | | 2 | | V |
| V_{IL} | Low-level input voltage | | 0.7 | | 0.8 | | V |
| V_{IK} | Input clamp voltage | $V_{CC} = \text{MIN}, I_I = -18$ mA | -1.5 | | -1.5 | | V |
| V_{OH} | High-level output voltage | $\overline{BI}/\overline{RB\overline{O}}$ $V_{CC} = \text{MIN}, V_{IH} = 2$ V, $V_{IL} = V_{IL \text{ max}}, I_{OH} = -50$ μA | 2.4 | 4.2 | 2.4 | 4.2 | V |
| V_{OL} | Low-level output voltage | $\overline{BI}/\overline{RB\overline{O}}$ $V_{CC} = \text{MIN}, V_{IH} = 2$ V, $V_{IL} = V_{IL \text{ max}}$ | $I_{OL} = 1.6$ mA $I_{OL} = 3.2$ mA | | 0.25 0.4 0.25 0.4 0.35 0.5 | | V |
| $I_{O(off)}$ | Off-state output current | a thru g $V_{CC} = \text{MAX}, V_{IH} = 2$ V, $V_{IL} = V_{IL \text{ max}}, V_{O(off)} = 15$ V | 250 | | 250 | | μA |
| $V_{O(on)}$ | On-state output voltage | a thru g $V_{CC} = \text{MIN}, V_{IH} = 2$ V, $V_{IL} = V_{IL \text{ max}}$ | $I_{O(on)} = 12$ mA $I_{O(on)} = 24$ mA | | 0.25 0.4 0.25 0.4 0.35 0.5 | | V |
| I_I | Input current at maximum input voltage | $V_{CC} = \text{MAX}, V_I = 7$ V | 0.1 | | 0.1 | | mA |
| I_{IH} | High-level input current | $V_{CC} = \text{MAX}, V_I = 2.7$ V | 20 | | 20 | | μA |
| I_{IL} | Low-level input current | $V_{CC} = \text{MAX}, V_I = 0.4$ V | Any input except $\overline{BI}/\overline{RB\overline{O}}$ | | -0.4 | | mA |
| | | | $\overline{BI}/\overline{RB\overline{O}}$ | | -1.2 | | |
| I_{OS} | Short-circuit output current | $\overline{BI}/\overline{RB\overline{O}}$ $V_{CC} = \text{MAX}$ | -0.3 | -2 | -0.3 | -2 | mA |
| I_{CC} | Supply current | $V_{CC} = \text{MAX},$ See Note 2 | 7 | 13 | 7 | 13 | mA |

†For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡All typical values are at $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$.

NOTE 2: I_{CC} is measured with all outputs open and all inputs at 4.5 V.

switching characteristics, $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------|--|---|-----|-----|-----|------|
| t_{off} | Turn-off time from A input | $C_L = 15$ pF, $R_L = 665$ Ω , See Note 3 | 100 | | | ns |
| t_{on} | Turn-on time from A input | | 100 | | | |
| t_{off} | Turn-off time from $\overline{RB\overline{I}}$ input, outputs (a-f) only | | 100 | | | ns |
| t_{on} | Turn-on time from $\overline{RB\overline{I}}$ input, outputs (a-f) only | | 100 | | | |

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



**SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49
SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49
BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS**

SDLS111 – MARCH 1974 – REVISED MARCH 1988

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

| | |
|--|----------------|
| Supply voltage, V_{CC} (see Note 1) | 7 V |
| Input voltage | 7 V |
| Operating free-air temperature range: SN54LS48 | -55°C to 125°C |
| SN74LS48 | 0°C to 70°C |
| Storage temperature range | -65°C to 150°C |

NOTE 1: Voltage values are with respect to network ground terminal.

recommended operating conditions

| | SN54LS48 | | | SN74LS48 | | | UNIT |
|---------------------------------------|--------------------------------|-----|------|----------|-----|------|---------|
| | MIN | NOM | MAX | MIN | NOM | MAX | |
| Supply voltage, V_{CC} | 4.5 | 5 | 5.5 | 4.75 | 5 | 5.25 | V |
| High-level output current, I_{OH} | a thru g | | -100 | | | -100 | μ A |
| | $\overline{BI}/\overline{RBO}$ | | -50 | | | -50 | |
| Low-level output current, I_{OL} | a thru g | | 2 | | | 6 | mA |
| | $\overline{BI}/\overline{RBO}$ | | 1.6 | | | 3.2 | |
| Operating free-air temperature, T_A | -55 | | 125 | 0 | | 70 | °C |

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS† | SN54LS48 | | | SN74LS48 | | | UNIT |
|-----------|--|--|--------------------------------|------|------|----------|------|------|---------|
| | | | MIN | TYP‡ | MAX | MIN | TYP‡ | MAX | |
| V_{IH} | High-level input voltage | | 2 | | | 2 | | | V |
| V_{IL} | Low-level input voltage | | | | 0.7 | | | 0.8 | V |
| V_{IK} | Input clamp voltage | $V_{CC} = \text{MIN}, I_I = -18 \text{ mA}$ | | | -1.5 | | | -1.5 | V |
| V_{OH} | High-level output voltage | a thru g and $\overline{BI}/\overline{RBO}$ $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = V_{IL \text{ max}}, I_{OH} = \text{MAX}$ | 2.4 | 4.2 | | 2.4 | 4.2 | | V |
| I_O | Output current | a thru g $V_{CC} = \text{MIN}, V_O = 0.85 \text{ V},$ Input conditions as for V_{OH} | -1.3 | -2 | | -1.3 | -2 | | mA |
| V_{OL} | Low-level output voltage | a thru g $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = V_{IL \text{ max}}$ | $I_{OL} = 2 \text{ mA}$ | | 0.25 | 0.4 | 0.25 | 0.4 | V |
| | | | $I_{OL} = 6 \text{ mA}$ | | | | 0.35 | 0.5 | |
| | $\overline{BI}/\overline{RBO}$ | $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = V_{IL \text{ max}}$ | $I_{OL} = 1.6 \text{ mA}$ | | 0.25 | 0.4 | 0.25 | 0.4 | V |
| | | | $I_{OL} = 3.2 \text{ mA}$ | | | | 0.35 | 0.5 | |
| I_I | Input current at maximum input voltage | Any input except $\overline{BI}/\overline{RBO}$ $V_{CC} = \text{MAX}, V_I = 7 \text{ V}$ | | | 0.1 | | | 0.1 | mA |
| I_{IH} | High-level input current | Any input except $\overline{BI}/\overline{RBO}$ $V_{CC} = \text{MAX}, V_I = 2.7 \text{ V}$ | | | 20 | | | 20 | μ A |
| I_{IL} | Low-level input current | Any input except $\overline{BI}/\overline{RBO}$ $V_{CC} = \text{MAX}, V_I = 0.4 \text{ V}$ | | | -0.4 | | | -0.4 | mA |
| | | | $\overline{BI}/\overline{RBO}$ | | | -1.2 | | | |
| I_{OS} | Short-circuit output current | $\overline{BI}/\overline{RBO}$ $V_{CC} = \text{MAX}$ | -0.3 | | -2 | -0.3 | | -2 | mA |
| I_{CC} | Supply current | $V_{CC} = \text{MAX},$ See Note 2 | | 25 | 38 | | 25 | 38 | mA |

†For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ \text{C}$.

NOTE 2: I_{CC} is measured with all outputs open and all inputs at 4.5 V.

switching characteristics, $V_{CC} = 5 \text{ V}, T_A = 25^\circ \text{C}$

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|---|-----|-----|-----|------|
| t_{PHL} Propagation delay time, high-to-low-level output from A input | $C_L = 15 \text{ pF}, R_L = 4 \text{ k}\Omega,$ | | | 100 | ns |
| t_{PLH} Propagation delay time, low-to-high-level output from A input | See Note 3 | | | 100 | |
| t_{PHL} Propagation delay time, high-to-low-level output (a-f only) from \overline{RBI} input | $C_L = 15 \text{ pF}, R_L = 6 \text{ k}\Omega,$ | | | 100 | ns |
| t_{PLH} Propagation delay time, low-to-high-level output (a-f only) from \overline{RBI} input | See Note 3 | | | 100 | |

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



SN5446A, '47A, '48, SN54LS47, 'LS48, 'LS49
SN7446A, '47A, '48, SN74LS47, 'LS48, 'LS49
BCD-TO-SEVEN-SEGMENT DECODERS/DRIVERS

SDLS111 – MARCH 1974 – REVISED MARCH 1988

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

| | | |
|---|-----|--------|
| Supply voltage, V_{CC} (see Note 1) | 7 | V |
| Input voltage | 7 | V |
| Current forced into any output in the off state | 1 | mA |
| Operating free-air temperature range: SN54LS49 | -55 | to 125 |
| SN74LS49 | 0 | to 70 |
| Storage temperature range | -65 | to 150 |

NOTE 1: Voltage values are with respect to network ground terminal.

recommended operating conditions

| | SN54LS49 | | | SN74LS49 | | | UNIT |
|---------------------------------------|----------|-----|-----|----------|-----|------|------|
| | MIN | NOM | MAX | MIN | NOM | MAX | |
| Supply voltage, V_{CC} | 4.5 | 5 | 5.5 | 4.75 | 5 | 5.25 | V |
| High-level output voltage, V_{OH} | | | 5.5 | | | 5.5 | V |
| Low-level output current, I_{OL} | | | 4 | | | β | mA |
| Operating free-air temperature, T_A | -55 | | 125 | 0 | | 70 | °C |

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | TEST CONDITIONS† | SN54LS49 | | | SN74LS49 | | | UNIT |
|--|--|-------------------------|------|------|----------|------|------|------|
| | | MIN | TYP‡ | MAX | MIN | TYP‡ | MAX | |
| V_{IH} High-level input voltage | | 2 | | | 2 | | | V |
| V_{IL} Low-level input voltage | | | | 0.7 | | | 0.8 | V |
| V_{IK} Input clamp voltage | $V_{CC} = \text{MIN}, I_I = -18 \text{ mA}$ | | | -1.5 | | | -1.5 | V |
| I_{OH} High-level output current | $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = V_{IL \text{ max}}, V_{OH} = 5.5 \text{ V}$ | | | 250 | | | 250 | μA |
| V_{OL} Low-level output voltage | $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = V_{IL \text{ max}}$ | $I_{OL} = 4 \text{ mA}$ | | 0.25 | 0.4 | 0.25 | 0.4 | V |
| | | $I_{OL} = 8 \text{ mA}$ | | | | 0.35 | 0.5 | |
| I_I Input current at maximum input voltage | $V_{CC} = \text{MAX}, V_I = 7 \text{ V}$ | | | 0.1 | | | 0.1 | mA |
| I_{IH} High-level input current | $V_{CC} = \text{MAX}, V_I = 2.7 \text{ V}$ | | | 20 | | | 20 | μA |
| I_{IL} Low-level input current | $V_{CC} = \text{MAX}, V_I = 0.4 \text{ V}$ | | | -0.4 | | | -0.4 | mA |
| I_{CC} Supply current | $V_{CC} = \text{MAX}, \text{ See Note 2}$ | 8 | 15 | | 8 | 15 | | mA |

†For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$.

NOTE 2: I_{CC} is measured with all outputs open and all inputs at 4.5 V.

switching characteristics, $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|--|-----|-----|-----|------|
| t_{PHL} Propagation delay time, high-to-low-level output from A input | $C_L = 15 \text{ pF}, R_L = 4 \text{ k}\Omega$ | | | 100 | ns |
| t_{PLH} Propagation delay time, low-to-high-level output from A input | See Note 3 | | | 100 | |
| t_{PHL} Propagation delay time, high-to-low-level output (a-f only) from RBI input | $C_L = 15 \text{ pF}, R_L = 6 \text{ k}\Omega$ | | | 100 | ns |
| t_{PLH} Propagation delay time, low-to-high-level output (a-f only) from RBI input | See Note 3 | | | 100 | |

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



TAPE AND REEL INFORMATION



QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74LS47NSR | SO | NS | 16 | 2000 | 330.0 | 16.4 | 8.2 | 10.5 | 2.5 | 12.0 | 16.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74LS47NSR | SO | NS | 16 | 2000 | 346.0 | 346.0 | 33.0 |

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|-----------------------------|--|
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| RF/IF and ZigBee® Solutions | www.ti.com/lprf |

Applications

| | |
|--------------------|--|
| Audio | www.ti.com/audio |
| Automotive | www.ti.com/automotive |
| Broadband | www.ti.com/broadband |
| Digital Control | www.ti.com/digitalcontrol |
| Medical | www.ti.com/medical |
| Military | www.ti.com/military |
| Optical Networking | www.ti.com/opticalnetwork |
| Security | www.ti.com/security |
| Telephony | www.ti.com/telephony |
| Video & Imaging | www.ti.com/video |
| Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated