

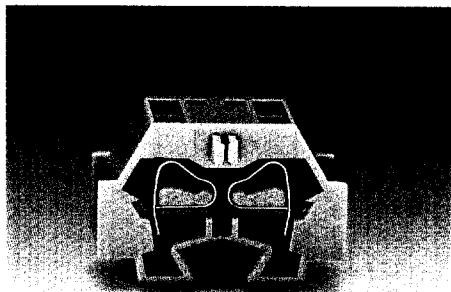
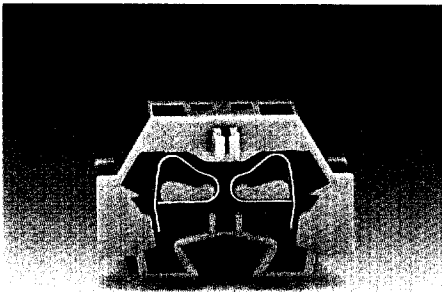





Modular Terminal Blocks with Fixing Flange or Snap-in Mounting Foot, Series 262










<p>0.08 – 4 mm² 630 V/8 kV/3 ① 24 A</p> <p>Terminal block width 7 mm / 0.276 in  9 – 10 mm / 0.37 in</p> <p>AWG 28 – 12 300/600 V, 20/5 A ② 300/600 V, 25/5 A ③</p> <p>* ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺</p>	<p>2 x 0.08 – 4 mm² 630 V/8 kV/3 ① 32 A</p> <p>Terminal block width 12 mm / 0.472 in  9 – 10 mm / 0.37 in</p> <p>2 x AWG 28 – 12 300/600 V, 20/5 A ② 300/600 V, 25/5 A ③</p> <p>* ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺</p>
--	---



- ① 630 V = rated voltage
8 kV = rated surge voltage
3 = pollution degree
(see also Section 10)
- ② Suitable for EEx i applications

Description	Color	Item-No.	Pack.-unit pcs	Color	Item-No.	Pack.-unit pcs	
 <p>Terminal blocks with fixing flange, for screw fixing or similar methods, fixing hole diameter 3.2 mm (with mounting adapter 209-123 also for DIN 35 rail)</p>	2-conductor terminal blocks			4-conductor terminal blocks			
	grey	262-301	100 (2 x 50)	grey	262-331	100 (2 x 50)	
	blue	262-304 ①	100 (2 x 50)	blue	262-334 ①	100 (2 x 50)	
	orange	262-306	100 (2 x 50)	orange	262-336	100 (2 x 50)	
 <p>Terminal blocks with snap-in mounting foot, for plate thickness 0.6 – 1.2 mm, fixing hole diameter 3.5 mm (fits aluminum rail 210-154 or with mounting adapter 209-120 for DIN 35 rail)</p>	2-conductor terminal blocks			4-conductor terminal blocks			
	grey	262-311	100 (2 x 50)	grey	262-341	100 (2 x 50)	
	blue	262-314 ①	100 (2 x 50)	blue	262-344 ①	100 (2 x 50)	
	orange	262-316	100 (2 x 50)	orange	262-346	100 (2 x 50)	
 <p>End terminal block ③, without fixing foot, for terminal strips with snap-in mounting feet (see dimensioned drawings on page 3.23 and example of an assembly on page 3.51.)</p>	2-conductor terminal blocks			4-conductor terminal blocks			
	grey	262-321	100 (2 x 50)	grey	262-351	100 (2 x 50)	
	blue	262-324 ①	100 (2 x 50)	blue	262-354 ①	100 (2 x 50)	
	orange	262-326	100 (2 x 50)	orange	262-356	100 (2 x 50)	
		green-yellow	262-327	100 (2 x 50)	green-yellow	262-357	100 (2 x 50)

Accessories for modular terminal blocks and terminal strips (Marking accessories see Section 8.)

 <p>End plate with fixing flange</p>	grey	262-361	50	grey	262-361	50
 <p>End plate with snap-in mounting foot</p>	grey	262-371	50	grey	262-371	50
 <p>Comb type jumper bar, insulated, 2-way</p>	I _N 16 A grey	262-402	25	I _N 16 A grey	262-402	25
		reduce wire to 2.5 mm ² /AWG 14 max.			reduce wire to 2.5 mm ² /AWG 14 max.	
 <p>Operating tool, insulated, for connecting the comb type jumper bar</p>	2-way	209-132	1	2-way	209-132	1
 <p>Aluminum carrier rail, 1000 x 18 x 7 mm 3'3" x 0.709 x 0.276 in</p>		210-154	1		210-154	1
 <p>Plastic end stop, with WSB marking facility, for aluminum rail 210-154</p>	6 mm / 0.236 in wide grey	209-122	25	6 mm / 0.236 in wide grey	209-122	25
 <p>Mounting adapter, for terminal blocks with snap-in mounting foot, for DIN 35 rail</p>	6 mm / 0.236 in wide grey	209-120	25	6 mm / 0.236 in wide grey	209-120	25
 <p>Mounting adapter with screw, for terminal blocks with fixing flange, for DIN 35 rail</p>	6 mm / 0.236 in wide grey	209-123	25	6 mm / 0.236 in wide grey	209-123	25
 <p>Mounting adapter for DIN 35 rail, can be used as end stop</p>	6.5 mm / 0.256 in wide grey	209-137	25	6.5 mm / 0.256 in wide grey	209-137	25

* For international approvals (with corresponding ratings) see pages 10.3 – 10.38.