



ZR10

- 2 Connections

Technical Data





Wire sizes		Insulating Material	
Solid min	1.5 mm ²	Material	PA 6.6
Solid max	16.0 mm ²	Flammability Class	UL 94 V-0
Stranded (flexible) min	1.5mm ²	Temperatures	
Stranded (flexible) max	16.0 mm ²	Working Temperature	-40 - 120 °C
Stranded (flexible) min	1.5mm ²	Dimensions	
Stranded (flexible) max	10.0 mm ²	Width	10.1 mm
Stranded with Ferrule min	1.5 mm ²	Length	73.5 mm
Stranded with Ferrule max	10.0 mm ²	Height TS35 x 7.5	50.5 mm

Electrical Data


General

Cross Connection Channels	2
Test Pick off	2

Colours

	BEIGE, similar RAL 1019
	BLUE, similar RAL 5015
	ORANGE, similar RAL 2003
	GREEN, similar RAL 6018

Connection Diagram

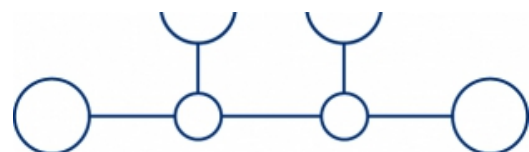

Order Data

Article Designation	Article Number	PU
ZR10-BEIGE	43597.2	50
ZR10-BLUE	43597.5	50
ZR10-ORANGE	43597.3	50

Accessoires

Article Designation	Article Number	PU
End Plate ZAP10/2A	493788.2	20
Cross-Connection insulated ZQ10/2	493789.8	20
Four-Way Covers ZAD10/4/B	493709.0	20
End Stopn ZES35	493748.2	50
Test Adapter ZTA10	493790.2	10
Quick Labelling PSB8/40	499323.7	400

Ratings

Ratings	CSA	CSAus	IEC
Rated Voltage	500 V	500 V	1.000 V
Rated Current	55 A	55 A	57 A
Rated Wire Size	AWG 16-6	AWG 16-6	10.0 mm ²
Rated Impulse Voltage			8 V
Pollution Degree			3